

HISTORIC INVENTORY

1 No 17T310094		4 Present Name(s) Edward L. Schmidt House		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34103-31		16626 Chesterfield Airport Road		
6 Specific Location Burkhardt Place, Lot 2		16. Thematic Category		2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1920		
8 Site Plan with North Arrow		18. Style or Design bungalow 22		
9 Coordinates UTM Lat Long		19. Architect or Engineer		4. Present Name(s) Edward L. Schmidt House
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		20. Contractor or Builder		
11. On National Register? Yes ☐ No ☒		21. Original Use, if apparent residence OIA		
12. Is it Eligible? Yes ☐ No ☐		22 Present Use residence		5. Other Name(s) 16626 Chesterfield Airport Road
13 Part of Estab Hist Dist.? Yes ☐ No ☒		23 Ownership Public ☐ Private ☒		
14. District Potent'l? Yes ☒ No ☐		24. Owner's Name & Address, if known Henry J. & Ida Mae Thomassen		
15 Name of Established District		25. Open to Public? Yes ☐ No ☒		6. Other Name(s) 16626 Chesterfield Airport Road
42 Further Description of Important Features The roofing material is asphalt in large squares arranged diagonally, with ribbing at the angles. The front porch, actually a verandah, has a wide frieze that continues around the house above the windows. Porch posts are short, thick wood obelisks on brick piers. The porch floor is wood with open space below. The railing has a series of X-shaped supports. Paired front windows are one-over-one, but the paired windows in the large hip-roofed front dormer are three-over-one. A pair of small ornamental (continued)		26. Local Contact Person or Organization		
43 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now known as Chesterfield Airport Road). His son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses and sold other lots without houses. Since the houses on lots 2, 3, and 5 are (continued)		27. Other Surveys in Which Included		
44 Description of Environment and Outbuildings The house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom.		28. No. of Stories 1 1/2		7. Other Name(s) 16626 Chesterfield Airport Road
45 Sources of Information St. Louis County Recorder of Deeds, Book 897, p. 132.		29. Basement? Yes ☒ No ☐		
46. Prepared by E. Hamilton		30. Foundation Material concrete 65		
47. Organization St. Louis County Parks		31. Wall Construction frame WA		8. Other Name(s) 16626 Chesterfield Airport Road
48. Date 8/89		32. Roof Type & Material hip, comp. HP 63		
49. Revision Date(s)		33. No. of Bays DR Front 3 Side 4		
46. Prepared by E. Hamilton		34. Wall Treatment asphalt siding 63		9. Other Name(s) 16626 Chesterfield Airport Road
47. Organization St. Louis County Parks		35. Plan Shape rectangular		
48. Date 8/89		36. Changes (Explain in #42) Add: RI Altered ☒ Moved ☐		
49. Revision Date(s)		37. Condition Interior 30 30 Exterior good		10. Other Name(s) 16626 Chesterfield Airport Road
46. Prepared by E. Hamilton		38. Preservation Underway? Yes ☐ No ☒		
47. Organization St. Louis County Parks		39. Endangered? By What? Yes ☐ No ☒		
48. Date 8/89		40. Visible from Public Road? Yes ☒ No ☐		11. Other Name(s) 16626 Chesterfield Airport Road
49. Revision Date(s)		41. Distance from and Frontage on Road /50		
46. Prepared by E. Hamilton		42. Further Description of Important Features The roofing material is asphalt in large squares arranged diagonally, with ribbing at the angles. The front porch, actually a verandah, has a wide frieze that continues around the house above the windows. Porch posts are short, thick wood obelisks on brick piers. The porch floor is wood with open space below. The railing has a series of X-shaped supports. Paired front windows are one-over-one, but the paired windows in the large hip-roofed front dormer are three-over-one. A pair of small ornamental (continued)		
47. Organization St. Louis County Parks		43. History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now known as Chesterfield Airport Road). His son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses and sold other lots without houses. Since the houses on lots 2, 3, and 5 are (continued)		12. Other Name(s) 16626 Chesterfield Airport Road
48. Date 8/89		44. Description of Environment and Outbuildings The house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom.		
49. Revision Date(s)		45. Sources of Information St. Louis County Recorder of Deeds, Book 897, p. 132.		
46. Prepared by E. Hamilton		46. Prepared by E. Hamilton		13. Other Name(s) 16626 Chesterfield Airport Road
47. Organization St. Louis County Parks		47. Organization St. Louis County Parks		
48. Date 8/89		48. Date 8/89		
49. Revision Date(s)		49. Revision Date(s)		14. Other Name(s) 16626 Chesterfield Airport Road
46. Prepared by E. Hamilton		46. Prepared by E. Hamilton		
47. Organization St. Louis County Parks		47. Organization St. Louis County Parks		
48. Date 8/89		48. Date 8/89		15. Other Name(s) 16626 Chesterfield Airport Road
49. Revision Date(s)		49. Revision Date(s)		
46. Prepared by E. Hamilton		46. Prepared by E. Hamilton		
47. Organization St. Louis County Parks		47. Organization St. Louis County Parks		16. Other Name(s) 16626 Chesterfield Airport Road
48. Date 8/89		48. Date 8/89		
49. Revision Date(s)		49. Revision Date(s)		

Edward L Schmidt House
16626 Chesterfield Airport Road

42. continued

windows is located on the east side. The front door is glazed. The siding resembles narrow coursed fieldstone.

43. continued

so similar in design, they were probably built at the same time by the Burkhardts. This lot was first sold to Otto Biele and then resold in 1927 to Edward L. and Emilie M. Schmidt.

BURKHARDT

831

SUBD.

STREET

ROAD

DRIVE

CAULW 82951526

178.29' GLEN WALKER W

75'

50'

60' W

S. 70° 47' E. 166.28'

50'

CML. DATE 1965
ADDN 1976

20.31

8.3

CLIP

75.25'

50.17'

26.0'

177310072

50'

66'

357.60'

177310031

177310050

177310050

177310050

177310050

177310050

177310050

177310050

177310050

177310050

SANTA

MARIA

83.43'

97.94'

40' W

18.14'

829



HISTORIC INVENTORY

SL-AS-020-002

1 No 17T310115		4. Present Name(s) Arthur Bierbrauer House		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34103-32		16630 Chesterfield Airport Road		
6 Specific Location Burkhardt Place, Lot 3		16. Thematic Category		2. County St. Louis
7 City or Town II Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1920		
8 Site Plan with North Arrow		18. Style or Design bungalow 22		
		19. Architect or Engineer		4. Present Name(s) Arthur Bierbrauer House
		20. Contractor or Builder		
		21. Original Use, if apparent residence DHA		
		22 Present Use residence		5. Other Name(s) 16630 Chesterfield Airport Road
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Victor J. & Kathleen A. Reinke 18656 Rieger Road		
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		1. No
10 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		
11. On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		
12. Is II Eligible? Yes ☐ No ☐				1. No
13 Part of Estab Hist Dist? Yes ☐ No ☒				
14. District Potent'l? Yes ☒ No ☐				
15 Name of Established District				1. No
42 Further Description of Important Features		Front verandah has brick parapet and posts capped with composition stone. Posts have thicker lower piers, thinner upper ones. Front steps are concrete. Large dormer over front has hipped roof with exposed rafters, paired three-over-one windows, white painted composition walls. East side elevation has corbelled chimney breast flanked by square ornamental windows.		1. No
43 History and Significance		The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now known as Chesterfield Airport Rd). Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. Since the houses on lots 2, 3, and 5 are so similar (continued)		1. No
44 Description of Environment and Outbuildings		A two-car frame garage with gable roof is located south-east of the house. The house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom. (1)		
45 Sources of Information St. Louis County Recorder of Deeds, Book 725, p. 541.		46. Prepared by E. Hamilton		1. No
		47. Organization St. Louis County Parks		
		48. Date 8/89		
		49. Revision Date(s)		1. No

Arthur Bierbrauer House
16630 Chesterfield Airport Road

43. continued

in design, they were probably built at the same time by the Burkhardts. This lot was sold in 1925 to Arthur E. Bierbrauer, who seems to have been related to the Katie and August Bierbrauer who owned several other lots in Burkhardt Place.

SL AS-020-002

SCALE 1"=60'

BURKHARDT

831

SUBD.

STREET

ROAD

DRIVE

2031

831

SUR

8295/526

178.29'

75'

50'

60' W

75.25'

50.17'

177310072

168.04'

177310160

177310157

163.94'

177310149

177310131

159.89'

151.64'

177310156

177310143

145.45'

139.36'

133.09'

CML. DATE 1965

177310038

75.80'

18.14'

40' W

SANTA

MARIA

97.94'

83.43'

829



HISTORIC INVENTORY

1 No 17T310104		4 Present Name(s) Andrew E. J. Fick House <i>not entered</i>		1 No	
2 County St. Louis		5 Other Name(s)		2 County St. Louis	
3 Location of Negatives 34103-33		16632 Chesterfield Airport Road		4 Present Name(s) Andrew E. J. Fick House	
6 Specific Location Burkhardt Place, Lot 4		16. Thematic Category		28. No. of Stories $1\frac{1}{2}$	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1920		29. Basement? Yes ☒ No ☐	
8 Site Plan with North Arrow		18. Style or Design modified bungalow		30. Foundation Material concrete	
		19. Architect or Engineer		31. Wall Construction prob. masonry	
		20. Contractor or Builder		32. Roof Type & Material gable, comp.	
		21. Original Use, if apparent residence		33. No. of Bays Front irr. 3 Side 2	
		22. Present Use residence		34. Wall Treatment brick, diagonal siding	
		23. Ownership Public ☐ Private ☒		35. Plan Shape irregular	
		24. Owner's Name & Address, if known Lawrence E./Linda Smith 16446 Dapple Gray Court Chesterfield, MO 63005		36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐	
9 Coordinates Lat Long		25. Open to Public? Yes ☒ No ☐		37. Condition Interior Exterior good	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization Pridemaster Painting		38. Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☒	
12. Is It Eligible? Yes ☐ No ☐				40. Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒				41. Distance from and Frontage on Road /50 ft.	
14. District Potent'l? Yes ☒ No ☐					
15 Name of Established District					
42 Further Description of Important Features		The brick walls at the sides and back of this house run down to the ground, where other houses in this group have exposed concrete foundations. This suggests that the present brick walls are a veneer over earlier construction. The front part of the roof is at a lower angle than the upper part, suggesting that this was once a verandah. It is now enclosed with flush siding placed diagonally. The gabled dormer in the center also has this siding placed to converge in the center. The entry, a plain door. (contd)		5 Other Name(s) 16632 Chesterfield Airport Road	
43 History and Significance		The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now known as Chesterfield Airport Rd). Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. This lot was not sold until 1932 when it was (contd)		Photo	
44 Description of Environment and Outbuildings		The front yard is mostly paved. A two-car garage in back has a side gable roof and aluminum siding. This house is the most altered of a row of stylistically related houses, all built at the foot of a hill on the edge of the Gumbo Bottom.			
45 Sources of Information St. Louis County Recorder of Deeds, Book 1164, p. 404.		46. Prepared by E. Hamilton			
		47. Organization St. Louis County Parks			
		48. Date 8/89		49. Revision Date(s)	

Andrew E. J. Fick House
16632 Chesterfield Airport Road

42. continued

approached by a deck with steps descending to the driveway on the west. Windows in the new part include a square picture window and a three-part window of low horizontal panes. The dormer window is also a fixed pane.

43. continued

acquired by Andrew E. J. Fick. He had previously owned lot 5 next door since 1924 but sold it back to the Burkhardts the same day he bought this one from them. Because of the extent of alterations, it is no longer possible to tell from the appearance of this house whether it was built and rented by the Burkhardts or built from scratch by Fick, but one can note that the house would never have looked like the two nearly identical ones on either side.

SL-AS-020-003

BURKHARDT

831

SUBD

STREET

ROAD

DRIVE

2031

832

SUP.

MARIA

SANTA



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1. No. 17T310126		4. Present Name(s) Bierbrauer-Fick House		1. No 2. County St. Louis 3. Location of Negatives 34103-35 6. Specific Location Burkhardt Place, Lot 5 7. City or Town - If Rural, Township & Vicinity Chesterfield 8. Site Plan with North Arrow
2. County St. Louis		5. Other Name(s) 16636 Chesterfield Airport Road		
3. Location of Negatives 34103-35		5. Other Name(s) 16636 Chesterfield Airport Road		
6. Specific Location Burkhardt Place, Lot 5		16. Thematic Category		2. County St. Louis 3. Location of Negatives 34103-35 6. Specific Location Burkhardt Place, Lot 5 7. City or Town - If Rural, Township & Vicinity Chesterfield 8. Site Plan with North Arrow
7. City or Town - If Rural, Township & Vicinity Chesterfield		17. Date(s) or Period constructed c. 1920 22		
8. Site Plan with North Arrow		18. Style or Design bungalow		
9. Coordinates UTM Lat Long		19. Architect or Engineer		
10. Site : : Structure : : Building : : Object : :		20. Contractor or Builder		
11. On National Register? Yes : : No : X		21. Original Use, if apparent residence OIA		
12. Is It Eligible? Yes : : No : : X		22. Present Use residence		
13. Part of Estab Hist Dist? Yes : : No : X		23. Ownership Public : : Private : X		
14. District Potent'l? Yes : X No : : X		24. Owner's Name & Address, if known Victor & Eunice Koesters		
15. Name of Established District		25. Open to Public? Yes : : No : X		
42. Further Description of Important Features The four porch posts on the front verandah are of standard brick, but the body of the house is of large tile laid in courses with occasional irregularly placed headers. The porch is trimmed with column and parapet caps of composition stone. Most windows are four-over-one. The front door is glazed. A hipped dormer in front has exposed rafters, stucco walls and three-over-one paired windows. At the rear a frame addition has triple windows.		26. Local Contact Person or Organization		4. Present Name(s) Bierbrauer-Fick House 5. Other Name(s) 16636 Chesterfield Airport Road
43. History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now known as Chesterfield Airport Rd.) Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. Since the houses on lots 2, 3, and 5 are so similar in design, they were probably built at the same time by the Burkhardts. This lot (contd)		27. Other Surveys in Which Included		
44. Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of Gumbo Bottom. This one is similar to but smaller than the one at 16630 Chesterfield Airport Road.		28. No. of Stories 1 1/2 - /		
45. Sources of Information St. Louis County Recorder of Deeds, Book 484, p. 461; 626, 258; 1164, 404. St. Louis County Probate Court, #18454.		29. Basement? Yes : X No : : X		
46. Prepared by E. Hamilton		30. Foundation Material concrete 65		
47. Organization St. Louis County Parks		31. Wall Construction masonry UD WU		
48. Date 8/89		32. Roof Type & Material hip, comp. HP 6B		
49. Revision Date(s)		33. No. of Bays Front 3 Side 4		
50. Distance from and Frontage on Road /50		34. Wall Treatment 99 21		
51. Distance from and Frontage on Road /50		35. Plan Shape rectangular		
52. Distance from and Frontage on Road /50		36. Changes (Explain in #42) Addition : X Altered : Moved : X		
53. Distance from and Frontage on Road /50		37. Condition Interior Exterior good		
54. Distance from and Frontage on Road /50		38. Preservation Underway? Yes : No : X		
55. Distance from and Frontage on Road /50		39. Endangered? By What? Yes : : No : X		
56. Distance from and Frontage on Road /50		40. Visible from Public Road? Yes : X No : : X		
57. Distance from and Frontage on Road /50		41. Distance from and Frontage on Road /50		

Bierbrauer-Fick House
16636 Chesterfield Airport Road

43. continued

was sold, along with lots 6 and 7 in 1920 to Katie Bierbrauer for \$1,000. She was the wife of August Bierbrauer. They sold lot 5 in 1924 to Andrew E. J. Fick, and he owned the property until 1932 when he sold it back to the Burkhardts and bought lot 4 instead. Edward Burkhardt died in 1934 and Lena in 1946, when this house was one of several she still owned. It was described then as "a one-story five-room modern dwelling of tile construction."

BURKHARDT

831

SUBD

STREET


ROAD

DRIVE

2031

832

SUR

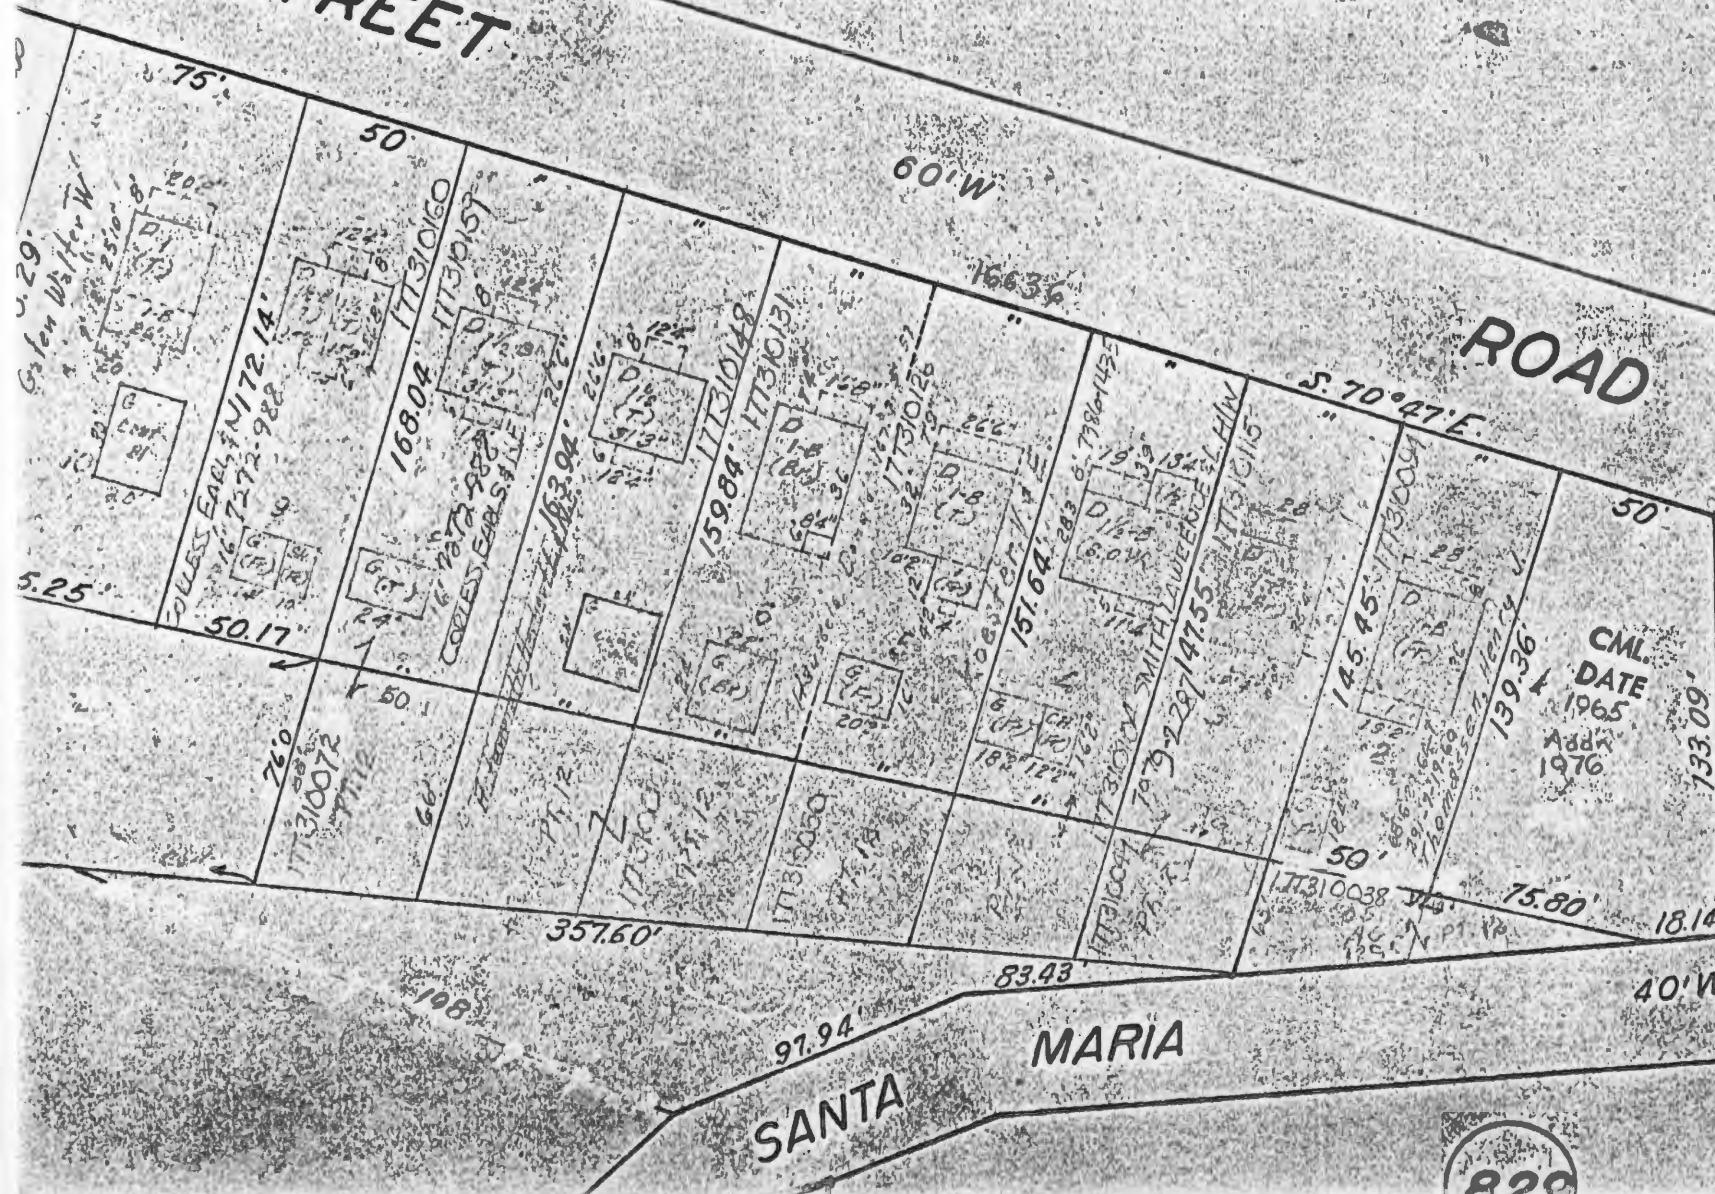



HISTORIC INVENTORY

1 No 17T310137		4 Present Name(s) Bierbrauer-Burkhardt House		1 NO
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-0		16640 Chesterfield Airport Road		
6 Specific Location Burkhardt Place, Lot 6		16. Thematic Category		2 County St. Louis 4 Present Name(s) Bierbrauer-Burkhardt House 5 Other Name(s) 16640 Chesterfield Airport Road
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1924		
8 Site Plan with North Arrow		18. Style or Design bungalow 22		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence OIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known D. W. Haussels		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		
10 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		
11 On National Register? Yes ☐ No ☒		28. No. of Stories 1		
12. Is It Eligible? Yes ☐ No ☐		29. Basement? Yes ☒ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		30. Foundation Material concrete block 65		
14. District Potent'l? Yes ☒ No ☐		31. Wall Construction brick 62		
15 Name of Established District		32. Roof Type & Material gable, comp. 63 63		
		33. No. of Bays Front 3 Side 4/5		
		34. Wall Treatment stretcher bond 30		
		35. Plan Shape rectangular		
		36. Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐		
		37. Condition Interior Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /50		
42 Further Description of Important Features This house has a front gable facing the street. It has a shaped bargeboard and angled brackets. Tucked under the left part of this is a gabled porch which has an identical bargeboard and brackets. The porch has brick corner posts, slightly canted, that form a continuous surface with the brick gable above. They are also tied into the parapets; which have brick caps stepped down to accommodate a flower box. The front steps are also brick, with rounded brick side blocks. The foundation appears (continued)		Photo		
43 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now named Chesterfield Airport Road). His son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. Lot 6 was one sold to Katie Bierbrauer in 1920, but later bought back by the Burkhardts. Edward Burkhardt died in 1934 (continued)				
44 Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of Gumbo Bottom. This house has a two-car masonry garage at the southwest corner of the lot.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 484, p. 461. St. Louis County Probate Court, #11575, #18454.		46. Prepared by E. Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 8/89		
		49. Revision Date(s)		

Bierbrauer-Burkhardt House
16640 Chesterfield Airport Road

42. continued

to be concrete block cast to look like rockfaced stone. Most windows are three-over-one. Several are paired or in groups of three. Two smaller square ornamental windows are on the east side of the house. A large chimney rises at the ridgeline near the back.

43. continued

and Lena in 1946. In her inventory this house was described as "a one and one-half story six-room modern brick bungalow-type dwelling."

SL-AS-020-005

83/

SUBD

STREET

ROAD

DRIVE

83

2031

8175

829

MARIA

SANTA





HISTORIC INVENTORY

SL-AS-020-006

1 No 17T310148		4. Present Name(s)		1 No 2. County St. Louis 4. Present Name(s) St. Louis 5. Other Name(s) 16644 Chesterfield Airport Road
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-2				
6 Specific Location Burkhardt Place, Lot 7		16. Thematic Category		28. No. of Stories 1½
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1925		29. Basement? Yes ☒ No ☐
8 Site Plan with North Arrow		18. Style or Design bungalow 49		30. Foundation Material concrete 65
		19. Architect or Engineer		31. Wall Construction masonry 40
		20. Contractor or Builder		32. Roof Type & Material GB 63 gable, comp. PR
		21. Original Use, if apparent residence 01A		33. No. of Bays Front 3 Side 2
		22 Present Use residence		34. Wall Treatment structural tile 99 99
		23 Ownership Public ☐ Private ☒		35. Plan Shape rectangular
		24. Owner's Name & Address, if known Herbert L. & Nonie E. Autenrieth 14891 Olive		36. Changes (Explain in #42) porch CB Addition ☒ Altered ☒ Moved ☐
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior good
10 Site ☒ Building Structure ☐ Object ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☒
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☒
12. Is It Eligible? Yes ☐ No ☐				40. Visible from Public Road? Yes ☒ No ☐
13 Part of Estab Hist Dist? Yes ☐ No ☒				41. Distance from and Frontage on Road /50
14. District Potential? Yes ☒ No ☐				5 Other Name(s) 16644 Chesterfield Airport Road
15 Name of Established District				
42 Further Description of Important Features This house is built of large-size brick called tile. The porch posts are standard brick with stucco obelisk-shaped upper portions. The front porch has a parapet instead of railing. The bungalow-type shed porch roof has been obscured by an oversize dormer extending from the main house to within a few feet of the edge of the porch roof. It has a low hip roof and walls of vertical siding. Windows there are one-over-one, paired in front smaller and single on the sides. Original windows are four-over-one.				
43 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now named Chesterfield Airport Road). His son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. This lot was purchased, along with lots 5 and 6, by Katie Bierbrauer in 1920, but she and her husband August later sold it back. (contd)				
44 Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom. This one is close in design to 16646 and 16650 Chesterfield Airport Road, immediately to the west. In the back yard is a two-car garage, masonry with frame front-facing gable.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 484, p. 461.				
46. Prepared by E. Hamilton				
47. Organization St. Louis County Parks				
48. Date 8/89				
49 Revision Date(s)				

16644 Chesterfield Airport Road

43. continued

The row of similar houses on lots 7, 8, and 9 was probably built by the Burkhardts about 1925. The house does not seem to have been sold, however, until after 1932.

SL-AS-070-006

831

SUBD

STREET

ROAD

DRIVE

83

STIP

2031

829

97.94
SANTA MARIA



HISTORIC INVENTORY

SL-AS-020-007

1 No 17T310159		4 Present Name(s) John Schaeffer House		1 No 2 County St. Louis 3 Location of Negatives 34104-3
2 County St. Louis		5. Other Name(s) 16646 Chesterfield Airport Road		
3 Location of Negatives 34104-3				
6 Specific Location Burkhardt Place, Lot 8		16. Thematic Category		2. County St. Louis 4 Present Name(s) John Schaeffer House 5 Other Name(s) 16646 Chesterfield Airport Road
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1925		
8 Site Plan with North Arrow		18. Style or Design bungalow 22		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Earl S. & Nancee E. Corless		
		25. Open to Public? Yes ☐ No ☒		
		26. Local Contact Person or Organization		
		27. Other Surveys in Which Included		
		28. No. of Stories 1½		
		29. Basement? Yes ☒ No ☐		
9 Coordinates UTM Lat Long		30. Foundation Material concrete 65		
0 Site ☐ Building ☒ Structure ☐ Object ☐		31. Wall Construction masonry 6D		
1 On National Register? Yes ☐ No ☒		32. Roof Type & Material gable, comp. 6B 63		
2 Part of Estab Hist Dist? Yes ☐ No ☒		33. No. of Bays Front 3 Side 2 DR		
3		34. Wall Treatment tile, painted 99		
4		35. Plan Shape rectangular		
5		36. Changes (Explain in #42) Addition: ☐ Altered: ☐ Moved: ☐ prch CB		
6		37. Condition Interior 61 Exterior good		
7		38. Preservation Underway? Yes ☐ No ☒		
8		39. Endangered? By What? Yes ☐ No ☒		
9		40. Visible from Public Road? Yes ☒ No ☐		
10		41. Distance from and Frontage on Road /50		
11		42 Further Description of Important Features Large brick, called tile, is now painted grey. Front porch is bungalow-style but only one bay wide, with shed roof continuing the line of the roof, and obelisk-shaped posts on high masonry piers. Thick railings have square posts. Windows are mostly four-over-one. Front windows and door now have ornamental shutters. Front windows also have flower boxes. Above the porch is a wide gabled dormer with paired windows and stuccoed walls. A brick chimney rises inside the east end of the house.		Photo
12		43 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now named Chesterfield Airport Road.) His son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. The row of similar houses on lots 7, 8, and 9 seems to have been built about 1925, when the one on lot 9 was sold. (continued)		
13		44 Description of Environment and Outbuildings An aluminum-sided garage is located southwest of the house. The house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom.		
14		45 Sources of Information St. Louis County Recorder of Deeds, Book 856, page 109.		46. Prepared by E. Hamilton 47 Organization St. Louis County Parks 48. Date 8/89 49 Revision Date(s)
15				
16				

John Schaeffer House
16646 Chesterfield Airport Road

43. continued

This one was not sold until 1927, and the third until the 1930's. The buyers of this one were John and Amelia Schaeffer. The present owners, members of an old Gumbo family, also own the adjacent house to the west.

SCALE 1"=60'

SL AS 020-007

BURKHARDT

831

SUBD.

STREET

ROAD

DRIVE

MARIA

SANTA

829

SUR.

2031

831

CML.
DATE
1965
Addn
1976

S. 70° 47' E.

60' W

40' W

357.60'

83.43'

97.94'

18.14'

75.80'

133.09'

139.36'

17310038

17310009

17310015

17310016

17310017

17310018

17310019

17310020

17310021

17310022

17310023

17310024

17310025

17310026

17310027

17310028

17310029

17310030

17310031

17310032

17310033

17310034

17310035

17310036

17310037

17310038

17310039

17310040

17310041

17310042

17310043

17310044

17310045

17310046

17310047

17310048

17310049

17310050

17310051

17310052

17310053

17310054

17310055

17310056

17310057

17310058

17310059

17310060

17310061

17310062

17310063

17310064

17310065

17310066

17310067

17310068

17310069

17310070

17310071

17310072

17310073

17310074

17310075

17310076

17310077

17310078

17310079

17310080

17310081

17310082

17310083

17310084

17310085

17310086

17310087

17310088

17310089

17310090

17310091

17310092

17310093

17310094

17310095

17310096

17310097

17310098

17310099

17310100

17310101

17310102

17310103

17310104

17310105

17310106

17310107

17310108

17310109

17310110

17310111

17310112

17310113

17310114

17310115

17310116

17310117

17310118

17310119

17310120

17310121

17310122

17310123

17310124

17310125

17310126

17310127

17310128

17310129

17310130

17310131

17310132

17310133

17310134

17310135

17310136

17310137

17310138

17310139

17310140

17310141

17310142

17310143

17310144

17310145

17310146

17310147

17310148

17310149

17310150

17310151

17310152

17310153

17310154

17310155

17310156

17310157

17310158

17310159

17310160

17310161

17310162

17310163

17310164

17310165

17310166

17310167

17310168

17310169

17310170

17310171

17310172

17310173

17310174

17310175

17310176

17310177

17310178

17310179

17310180

17310181

17310182

17310183

17310184

17310185

17310186

17310187

17310188

17310189

17310190

17310191

17310192

17310193

17310194

17310195

17310196

17310197

17310198

17310199

17310200

17310201

17310202

17310203

17310204

17310205

17310206

17310207

17310208

17310209

17310210

17310211

17310212

17310213

17310214

17310215

17310216

17310217

17310218

17310219

17310220

17310221

17310222

17310223

17310224

17310225

17310226

17310227

17310228

17310229

17310230

17310231

17310232

17310233

17310234

17310235

17310236

17310237

17310238

17310239

17310240

17310241

17310242

17310243

17310244

17310245

17310246

17310247

17310248

17310249

17310250

17310251

17310252

17310253

17310254

17310255

17310256

17310257

17310258

17310259

17310260

17310261

17310262

17310263

17310264

17310265

17310266

17310267

17310268

17310269

17310270

17310271

17310272

17310273

17310274

17310275

17310276

17310277

17310278

17310279

17310280

17310281

17310282

17310283

17310284

17310285

17310286

17310287

17310288

17310289

17310290

17310291

17310292

17310293

17310294

17310295

17310296

17310297

17310298

17310299

17310300

17310301

17310302

17310303

17310304



HISTORIC INVENTORY

SL-AS-020-008

1 No 17T310160	4 Present Name(s) John J. Corless House	1 No
2 County St. Louis	5 Other Name(s)	
3 Location of Negatives 34104-4	16650 Chesterfield Airport Road	
6 Specific Location Burkhardt Place, Lot 9	16 Thematic Category 17 Date(s) or Period constructed c. 1925 18 Style or Design bungalow 22 19 Architect or Engineer 20 Contractor or Builder 21 Original Use, if apparent residence DIA 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known Earl S. & Nancy E. Corless 16646 Chesterfield Airport Road 25 Open to Public? Yes ☐ No ☒ 26 Local Contact Person or Organization 27 Other Surveys in Which Included	2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield	28 No. of Stories 1½ 29 Basement? Yes ☒ No ☐ 30 Foundation Material concrete 65 31 Wall Construction masonry LD 32 Roof Type & Material gable, comp. GB6 33 No. of Bays Front 3 Side 2 DR 34 Wall Treatment structural tile 99 35 Plan Shape rectangular 36 Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐ 37 Condition Interior 61 Exterior good 38 Preservation Underway? Yes ☐ No ☒ 39 Endangered? By What? Yes ☐ No ☒ 40 Visible from Public Road? Yes ☒ No ☐ 41 Distance from and Frontage on Road /50	
8 Site Plan with North Arrow	4 Present Name(s) John J. Corless House	
9 Coordinates UTM Lat Long	0 Site ☐ Building ☒ Structure ☐ Object ☐ 11 On National Register? Yes ☐ No ☒ 12 Is It Eligible? Yes ☐ No ☐ 13 Part of Estab Hist Dist? Yes ☐ No ☒ 14 District Potent'l? Yes ☒ No ☐ 15 Name of Established District	5 Other Name(s) 16650 Chesterfield Airport Road
12 Further Description of Important Features This house is built of large-size bricks called tile. The porch posts are standard brick with stucco obelisk shaped upper portions. The front porch is bungalow-style but only one bay wide, with shed roof continuing the line of the main roof. Railings have X-shaped supports. Most windows are four-over-one; those in front have ornamental shutters. Above the porch is a wide gabled dormer with paired windows and stuccoed walls. A brick chimney rises inside the east end of the house.		
13 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now named Chesterfield Airport Road). His son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. The row of similar houses on lots 7, 8, (continued)		
14 Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom. This one is close in design to 16644 and 16646 Chesterfield Airport Road, immediately to the east. A low carport is southwest of the house.		5 Other Name(s) 16650 Chesterfield Airport Road
15 Sources of Information St. Louis County Recorder of Deeds, Book 764, p. 67.		
46 Prepared by E. Hamilton 47 Organization St. Louis County Parks 48 Date 8/89 49 Revision Date(s)		

Photo

John J. Corless House
16650 Chesterfield Airport Road

43. continued

and 9 seems to have been built about 1925, when this one was sold to John J. Corless. The house is still in the family, as is the adjacent house to the east.



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-009

1 No 17T310270		4 Present Name(s) Hyde Store		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34103-2		16655 Chesterfield Airport Road		
6 Specific Location Lot 12 & part of Lot 11, Christian Burkhardt SD in Survey 2031, T45 R4		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed c. 1915		
7 City or Town If Rural, Township & Vicinity Chesterfield		18. Style or Design vernacular 69		4 Present Name(s) Hyde Store
8 Site Plan with North Arrow		19. Architect or Engineer		
9 Coordinates UTM Lat Long		20. Contractor or Builder		
		21. Original Use, if apparent store 02 02E		
10 Site: ☒ Building ☒ Structure: ☐ Object: ☐		22 Present Use store		
		23 Ownership Public ☐ Private ☒		
11 On National Register? Yes ☐ No ☒		24. Owner's Name & Address, if known Charles W. Fawcett Jr.		
		25. Open to Public? Yes ☒ No ☐		
12 Is Eligible? Yes ☐ No ☐		26. Local Contact Person or Organization		
13 Part of Establishment? Yes ☐ No ☒		27. Other Surveys in Which Included		
14 District Potentially? Yes ☒ No ☐		28. No. of Stories 2		
15 Name of Established District		29. Basement? Yes ☐ No ☒		
42 Further Description of Important Features This simple brick commercial building has two-over-two windows upstairs and a two-story shed-roof porch in the back. The storefront is sheltered by a hipped hood with asphalt roofing.		30. Foundation Material not evident		
		31. Wall Construction brick UD		
43 History and Significance The original settlement of Chesterfield, said to date back to 1816, was about a half mile southwest of here, on the higher land on both sides of Wild Horse Creek Road. The village gradually shifted here because of the Chicago Rock Island and Pacific railroad. Christian Burkhardt, who was a farmer in the neighborhood, acquired 21 acres along the south side of the tracks and on the north side of Olive Street Road, as Chesterfield Airport Road was then called, in 1877. He then had August Elbring lay out Burkhardt		32. Roof Type & Material flat FT PR GI		
		33. No. of Bays Front 3 Side 4		
44 Description of Environment and Outbuildings This property has a large storage yard to one side.		34. Wall Treatment 30		
		35. Plan Shape rectangular		
45 Sources of Information St. Louis County Probate Court, cases 1482, 4616, 4957, 11575. St. Louis County Recorder of Deeds, Book 36, p. 140; 114, 592; 145, 451; 304, 367; 427,405; 446, 266; 466, 486. Thomas, History of St. Louis County (1911) Vol. I, p. 263, Vol. II, pp. 15-16, 142-143.		36. Changes (Explain in #42) pnc RS AW Addition ☒ Altered ☒ Moved ☐		
		37. Condition Interior Exterior fair		
46. Prepared by E. Hamilton		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
47. Organization St. Louis County Parks		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /100		
48. Date 8/89		49. Revision Date(s)		
		5 Other Name(s) 16655 Chesterfield Airport Road		

Hyde Store
16655 Chesterfield Airport Road

43. continued

Subdivision there for him, but he seems never to have recorded the plat. He died in 1898 leaving a widow and seven children, the youngest of whom was Hazel, age ten. Edward, the second son, took over the family store located at the depot, where the road crossed the tracks. A year before his death Christian Burkhardt sold this property, with a frontage of 150 feet, to William Koch. Koch built the little frame house at 16651 Chesterfield Airport Road, but he sold this west 50 feet in 1903 to Henry Herbert Hyde, who ran a blacksmith shop there. Henry Hyde was born in Grover in 1863, the son of English immigrants. Hyde worked as a carpenter and mechanic before becoming a blacksmith. He established the shop in Chesterfield primarily for the benefit of his younger son, Richard, but he retired here about 1909. He was married to Elizabeth Andreass, a daughter of Charles Andreass of Bellefontaine or Hilltown. He bought Koch's little house in 1912 and died in 1917, leaving, along with his real estate, about a ton of scrap iron, an anvil, forge, and other blacksmith tools. Mrs. Hyde died early in 1918. Sons Richard and Walter Hyde sold their interests to their sister Georgia, the wife of August Conrads, and she sold the property in 1920 to George C. Ruppel, Junior. Ruppel paid \$3,250, a fairly large amount for the time, so this building was probably already standing. It does not appear to be the small structure indicated in the atlas of 1909, so the present building must have replaced the earlier structure in the intervening decade.

ST. LOUIS

SL-AS-020-004

SURVEY

80

SOUTHWESTERN

N 78°04' W 222.83'
Doonack Brick Contracting Co.
6507-801 344 31574

17T22-0168

PT. 17T22-2353
FANCETT CHAS. JR.
7132-2354

17T21-0270

JS
Open shed
30'

100.00'

17T31-0247
FANCETT CHAS. JR.
7132-2354

17S100'

17T31-0379

1.49

Stone A
501 4W
20' 14'

300.00'

60' W

OLIVE

STREET

BURKHARDT

830

PLACE



S32°57'E

S51°05'E

67°32'-1125' 6-374

107'

60' 18"
40' 18"

61.31'

50'

190'

214.97'

119.12'

55'

50'

50'

50'

50'

50'

50'

50'

50'

50'

50'

50'



HISTORIC INVENTORY

1 No 17T310171		4 Present Name(s) Fannie Theresa Buck House		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-6		16656 Chesterfield Airport Road		
6 Specific Location Burkhardt Place, Lot 6		16 Thematic Category	28. No. of Stories 1	2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1918	29. Basement? Yes ☒ No ☐	
8 Site Plan with North Arrow		18. Style or Design bungalow/vernacular 18	30. Foundation Material concrete 65	
9 Coordinates UTM Lat Long		19. Architect or Engineer	31. Wall Construction masonry UD	4 Present Name(s) Fannie Theresa Buck House
10 Site ☒ Building ☒ Structure ☐ Object ☐		20. Contractor or Builder	32. Roof Type & Material gable, comp. 6B 63	
11. On National Register? Yes ☐ No ☒		21. Original Use, if apparent residence 01A	33. No. of Bays Front 3 Side 2	
12. Is It Eligible? Yes ☐ No ☐		22. Present Use residence	34. Wall Treatment structural tile 99	5. Other Name(s) 16656 Chesterfield Airport Road
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒		23 Ownership Public ☐ Private ☒	35. Plan Shape rectangular	
14. District Potent'l? Yes ☒ No ☐		24. Owner's Name & Address, if known Walter M. & Kasae Galen	36. Changes (Explain in #42) pna Addition: FU Moved:	
15 Name of Established District		25. Open to Public? Yes ☐ No ☒	37. Condition Interior Exterior good	16656 Chesterfield Airport Road
42 Further Description of Important Features The brick-like tile of this house has occasional headers in the basically stretcher bond composition. The hip-roofed front porch has regular brick bases for its square wooden posts, and other features include latticework under the wooden floor and plain balustrades. Windows are nine-over-one.		26. Local Contact Person or Organization	38. Preservation Underway? Yes ☐ No ☒	
43 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now known as Chesterfield Airport Rd.) Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. This was the first lot sold, in 1918, to (continued)		27. Other Surveys in Which Included	39. Endangered? By What? Yes ☐ No ☒	
44 Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of Gumbo Bottom. This house has a frame garage with old-fashioned hinged doors behind it.		40. Visible from Public Road? Yes ☒ No ☐		16656 Chesterfield Airport Road
45 Sources of Information St. Louis County Recorder of Deeds, Book 424, p. 484.		41. Distance from and Frontage on Road 175		
46. Prepared by E. Hamilton		47. Organization St. Louis County Parks		
48. Date 8/89		49. Revision Date(s)		

Fannie Theresa Buck House
16656 Chesterfield Airport Road


43. continued

Fannie Theresa Buck, a widow, for \$2,550. This price suggests that the house was already standing. The use of structural tile was repeated in later houses the Burkhardts built.

092
-3-74
K/CONST. CO
C


ST JAMES F. & V. D.
1922-1522

1.20 AC
17T22-0069



18'E 224.90'
17T22-0135

54 AC
FRANCIS E & VIOLA A.
229.85'

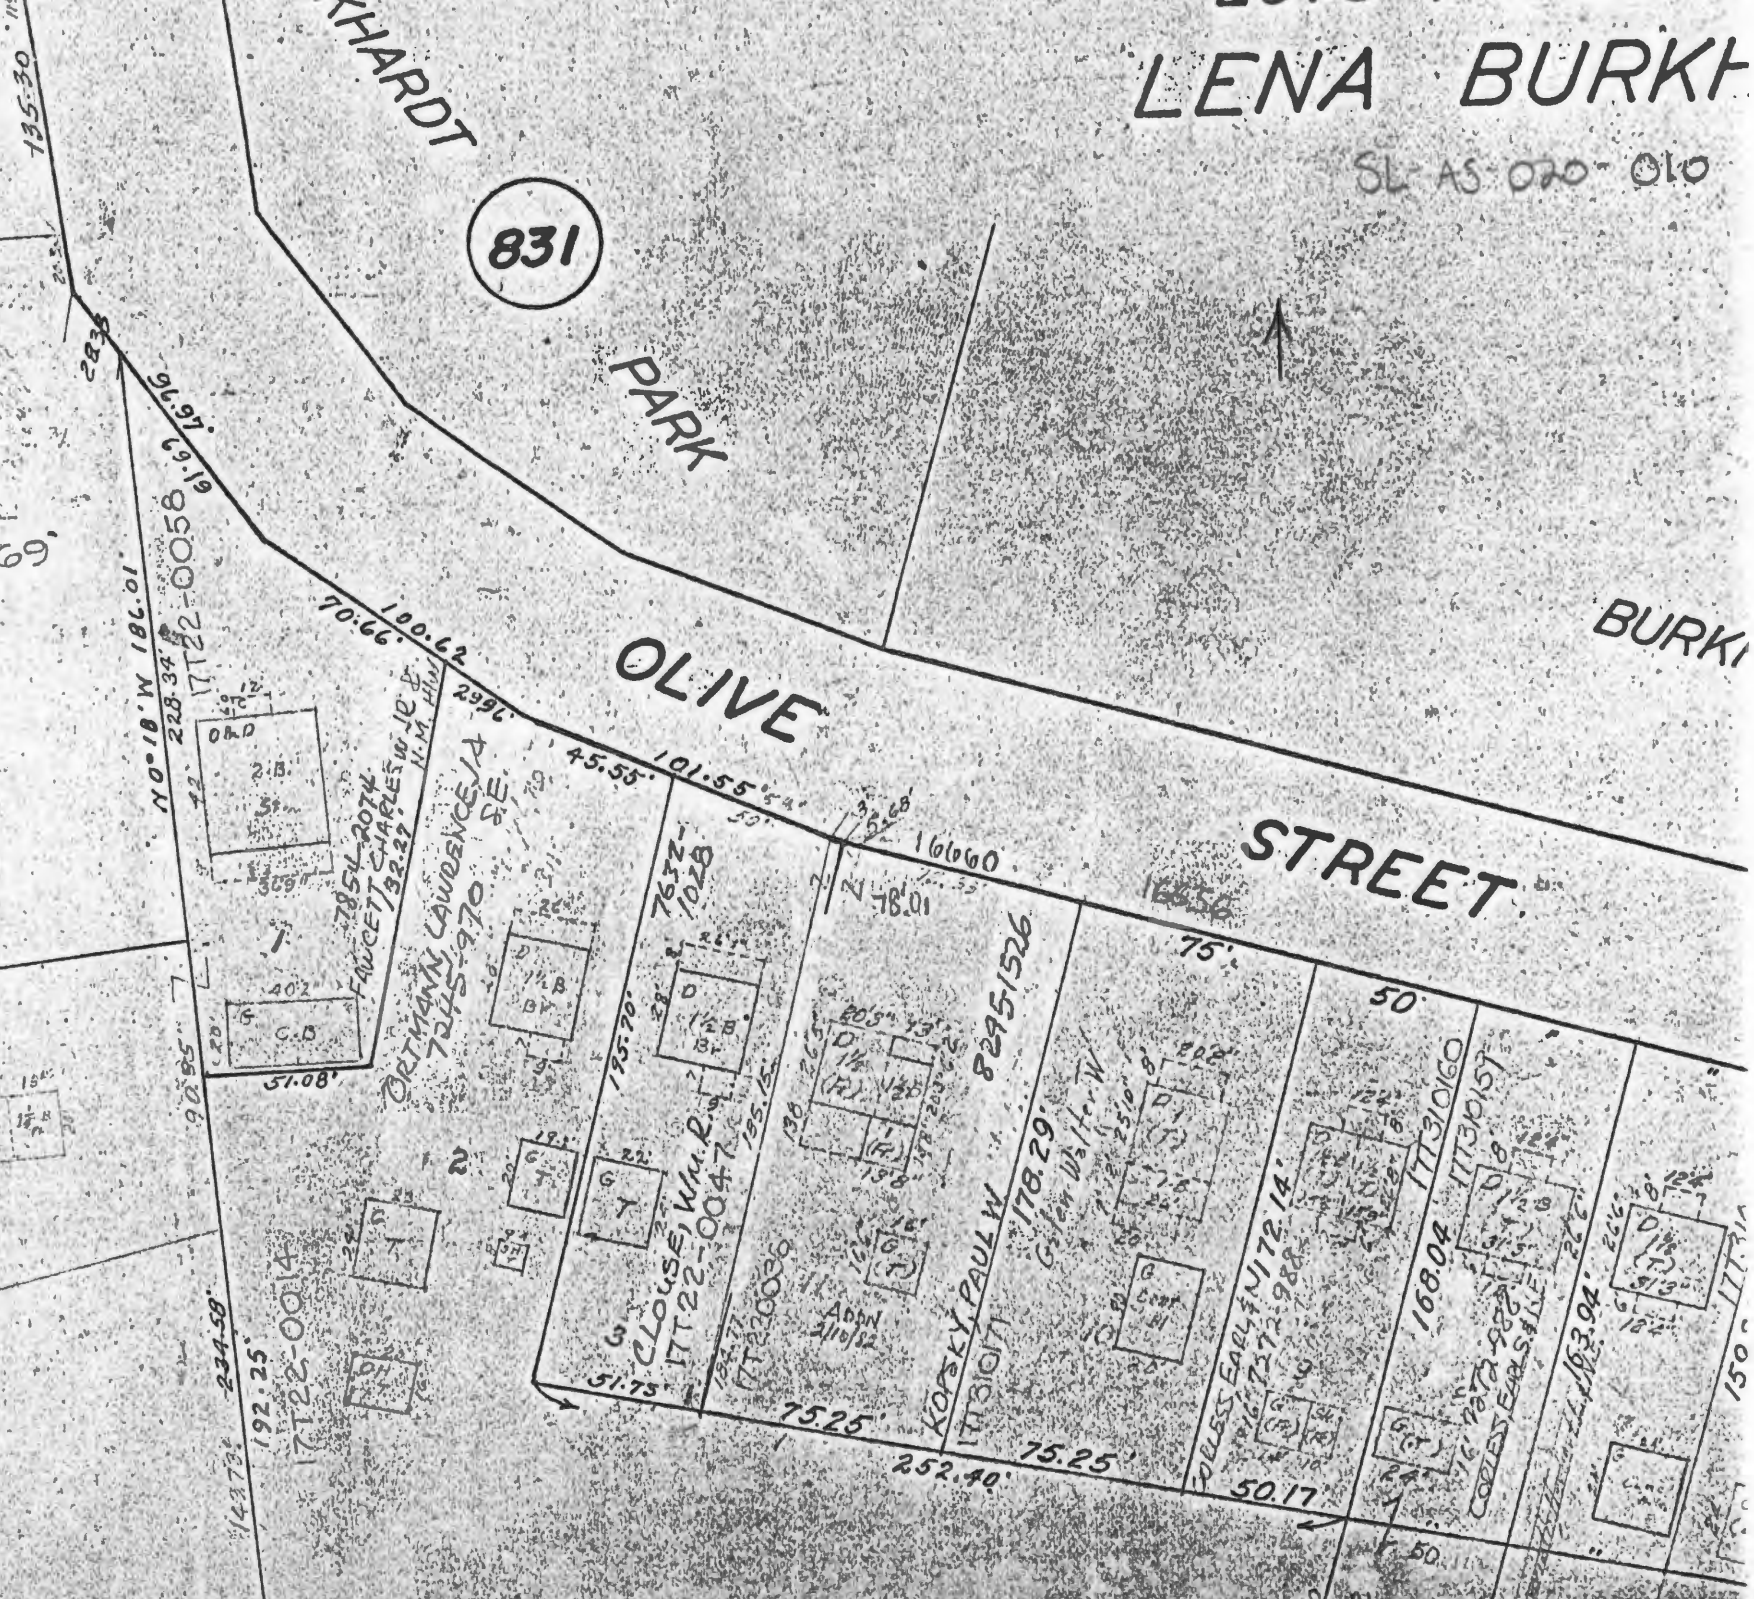

LENA BURKH
SL AS 020-010

831



HISTORIC INVENTORY

1 No. 17T220036		4 Present Name(s)		1 St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 77119-22		16660 Chesterfield Airport Road		
6 Specific Location Lot 11, Burkhardt Place		16 Thematic Category		28. No. of Stories 1½ - 1
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1919		29. Basement? Yes ☒ No ☐
8 Site Plan with North Arrow		18 Style or Design vernacular 49		30. Foundation Material concrete faced 65
		19 Architect or Engineer		31. Wall Construction frame WH
		20 Contractor or Builder		32. Roof Type & Material 16 SD cross gable, comp. 63
		21. Original Use, if apparent residence OIA		33. No. of Bays Front 5 Side irr. 3
		22 Present Use residence		34. Wall Treatment clapboard 21
		23 Ownership Public ☐ Private ☒		35. Plan Shape irregular
		24 Owner's Name & Address, if known Paul W. Kopsky		36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior good
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☒
11 On National Register? Yes ☐ No ☒		12 Is It Eligible? Yes ☐ No ☐		39. Endangered? By What? Yes ☐ No ☒
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☒ No ☐		40. Visible from Public Road? Yes ☒ No ☐
15 Name of Established District		27 Other Surveys in Which Included		41. Distance from and Frontage on Road /78'
42 Further Description of Important Features The right 3 bays of the front are under a projecting gable with 2 windows in it. The side gables also have 2 windows. The upper windows are 6-over-6, the lower are 1-over-1 and 1-over-8. The entry is by way of a wooden deck with board railing, possibly a replacement for an earlier porch. The rear wing is one story under a low shed roof.				Photo
43 History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now Chesterfield Airport Rd.) Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these house themselves and sold other lots without houses. Lot 11 seems never to have been sold. Judging by (contd.)				
44 Description of Environment and Outbuildings Behind the house rises the wooded ridge that forms the edge of the Missouri River bottom.				5 Other Name(s) 16660 Chesterfield Airport Road
45 Sources of Information St. Louis County Probate Court, #18454				
46. Prepared by E. Hamilton				47. Organization St. Louis County Parks
48 Date 8/89				
49 Revision Date(s)				

16660 Chesterfield Airport Road

43. continued

the style of the house it must have been one of the first built, but it was still owned by Lena Burkhardt at the time of her death in 1946. At that time it was described as "a one and one-half story five room modern frame dwelling."

092
6-3-74
K. CONST. CO
AC

EST JAMES F. & V. D.
6922-1522

1.20 AC
17T22-0069

224.90'

17T22-0135
.54 AC
FRANCIS E & VIOLA A.
229.85'

135.30' 115'

28.38'

N 0° 18' W 186.01'

143.73' 234.58'

192.25'

17T22-0014

96.97'

69.19'

17T22-0058

228.34'

70.66'

100.62'

299.6'

45.55'

101.55'

75.25'

178.29'

50.17'

168.04'

173.0160

173.0157

163.94'

50'

50'

50'

50'

50'

50'

50'

50'

50'

50'

50'

50'

831

PARK


OLIVE

STREET

BURK.

LENA BURKE

SL-AS-020-D11

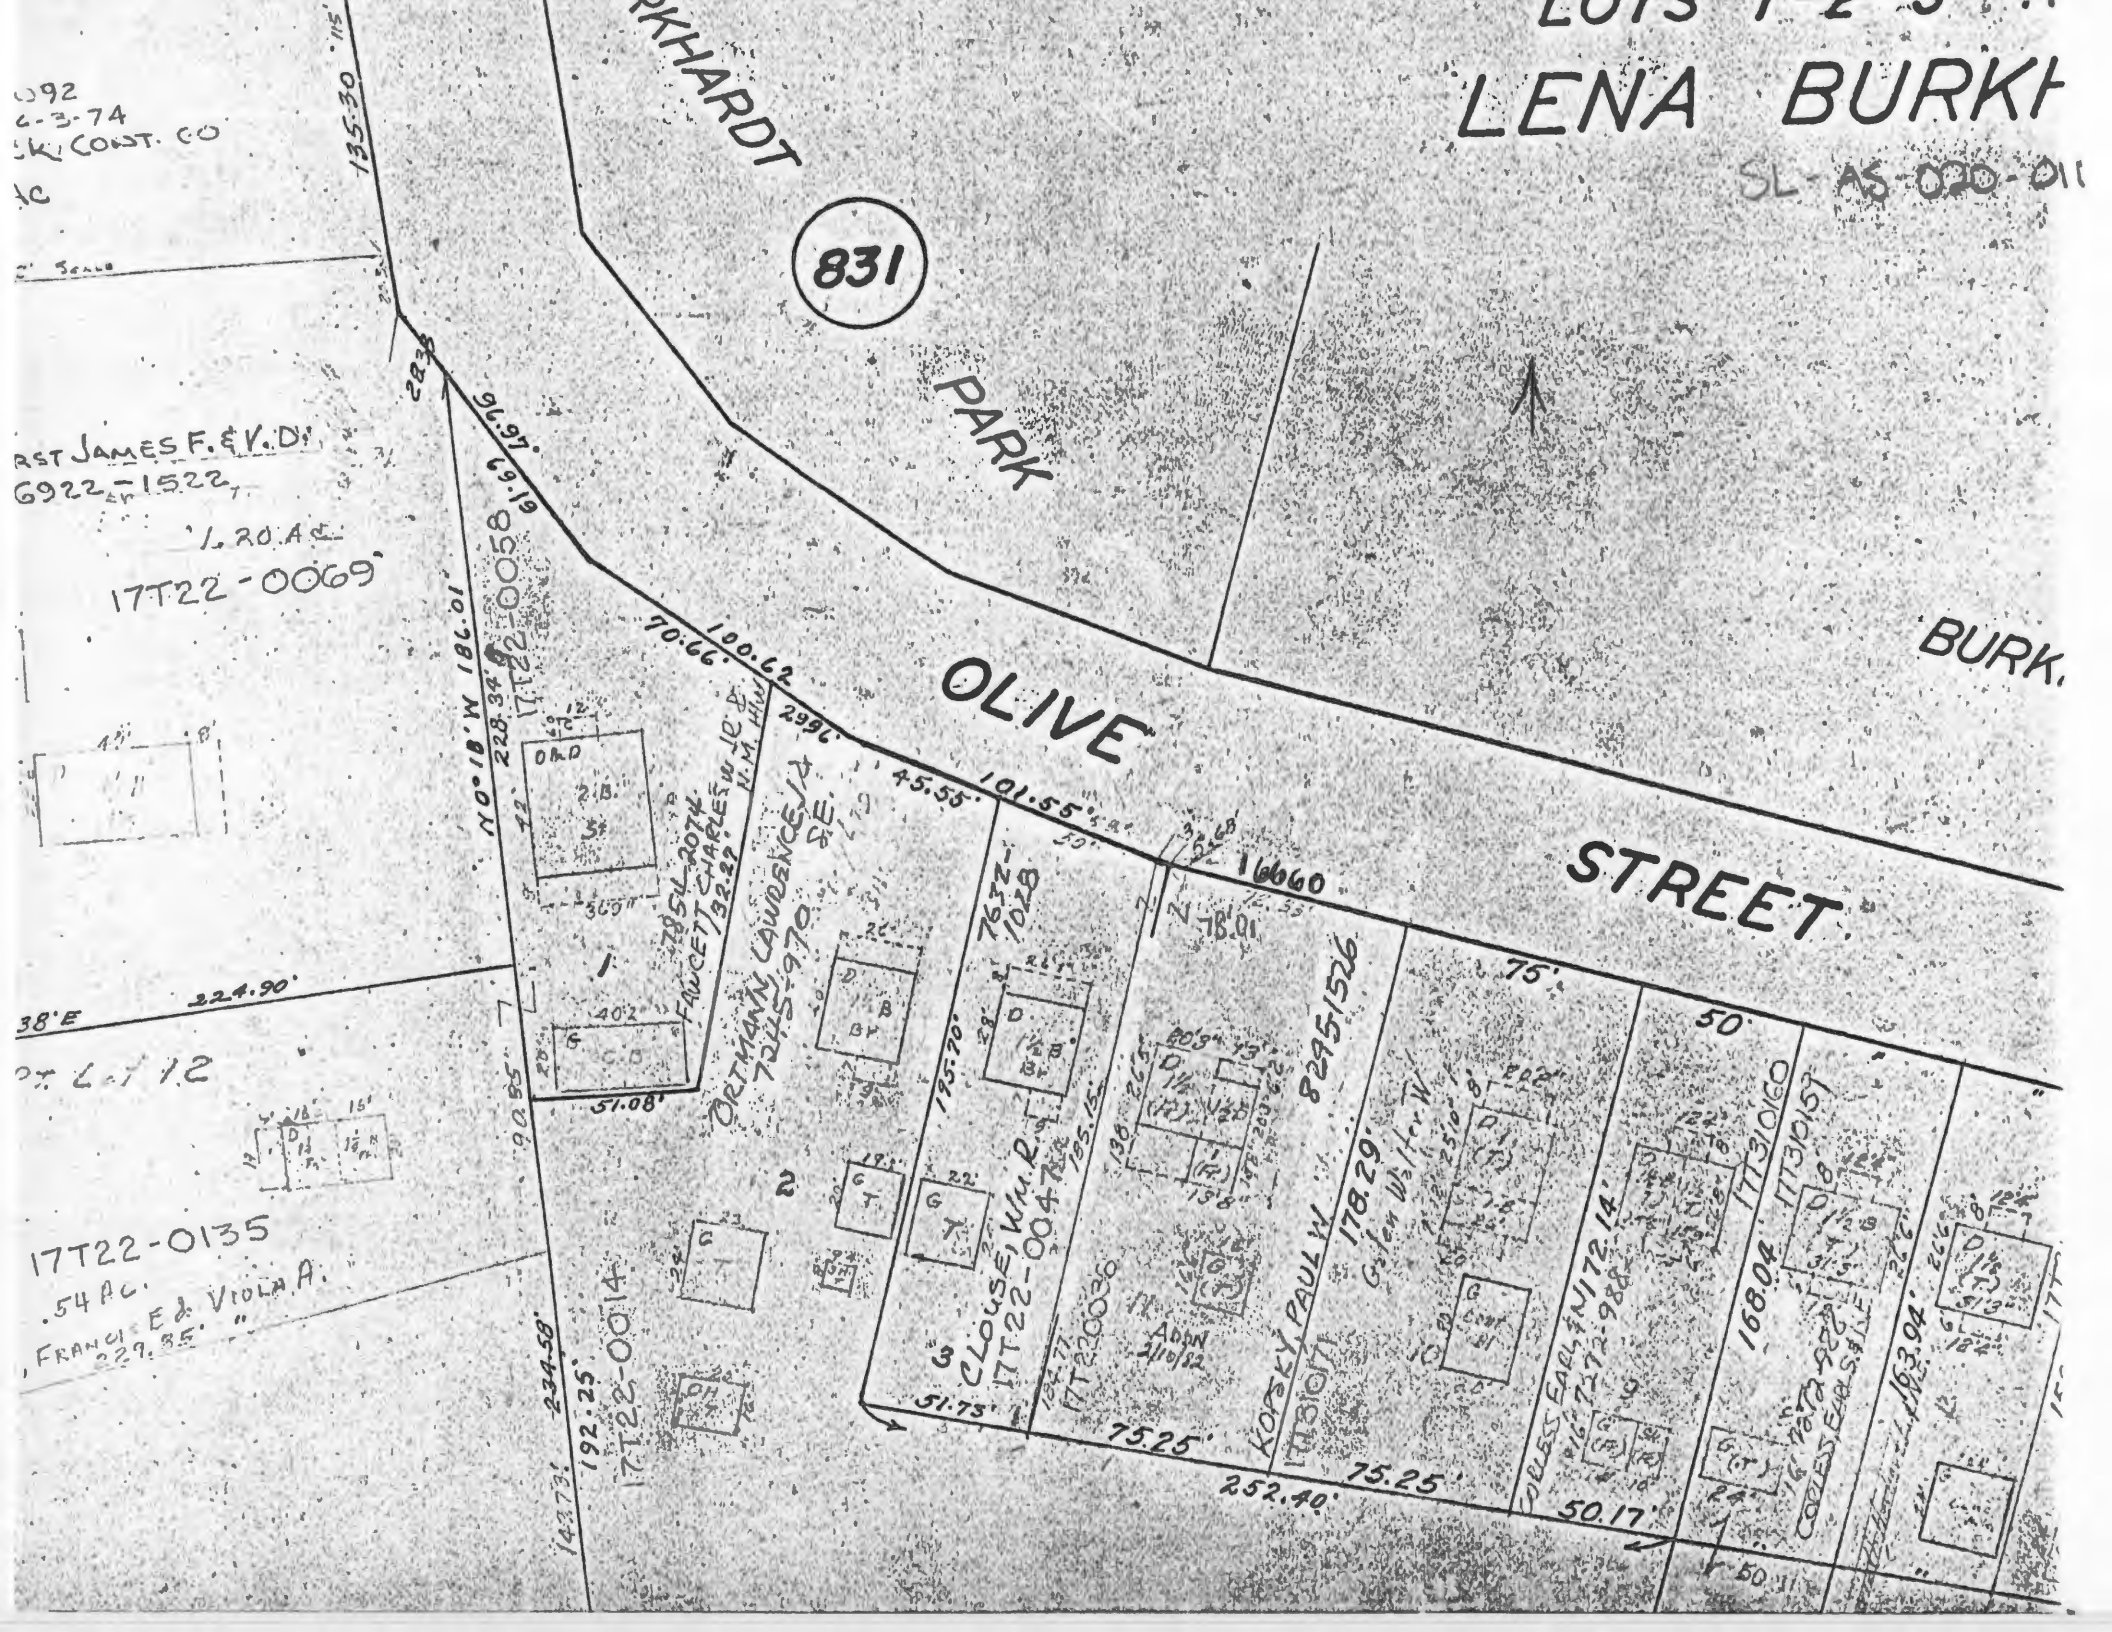



HISTORIC INVENTORY

1 No 17T220047		4 Present Name(s)		1 No 2 County St. Louis 3 Location of Negatives 34104-10
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-10		16662 Chesterfield Airport Road		
6 Specific Location Lot 3 Subdivision of Lena Burkhardt Estate		16 Thematic Category		2. County St. Louis 4 Present Name(s)
7 City or Town II Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1920		
8 Site Plan with North Arrow		18 Style or Design Bungalow 22		
9 Coordinates UTM Lat Long		19 Architect or Engineer		28. No. of Stories 1½ 29. Basement? Yes ☒ No 30. Foundation Material concrete 65 31. Wall Construction brick UD 32. Roof Type & Material gable, comp. 6B 63 33. No. of Bays Front 3 Side 3 34. Wall Treatment stretcher bond 30 35. Plan Shape rectangular 36. Changes (Explain in #42) pencil RI Addition: Amended ☒ Moved ☒
10 Site I I Structure I I Building ☒ Object I I		20 Contractor or Builder		
11. On National Register? Yes I I No ☒		21. Original Use, if apparent residence OIA		
12. Is II Eligible? Yes I I No I I		22 Present Use residence		37. Condition Interior Exterior fair
13 Part of Estab Hist Dist.? Yes I I No ☒		23 Ownership Public I I Private ☒		
14. District Potent'I? Yes ☒ No I I		24. Owner's Name & Address, if known William R. Clouse		
15 Name of Established District		25. Open to Public? Yes I I No ☒		38. Preservation Underway? Yes No ☒ 39. Endangered? By What? Yes I I No ☒ 40. Visible from Public Road? Yes ☒ No 41. Distance from and Frontage on Road /153
26. Local Contact Person or Organization		27. Other Surveys in Which Included		
42. Further Description of Important Features The front verandah of this house is under a roof with a slightly lower angle than the main roof. It has brick corner posts and a brick parapet, also curving brick cheeks to the stairs. The frieze at the top of the porch appears to have been replaced, and it is stained and sagging. Above the porch is a broad frame dormer with rafters exposed; paired windows are under the gable. They are three-over-one; others are five-over-one and other patterns. A brick chimney rises inside the west side of the front roof slope.		Photo		
43. History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890s when Christian Burkhardt started selling lots on the north side of Olive (now Chesterfield Airport Rd.) Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. Lot 12, at the west end of the subdivision was large (continued)		44. Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom. This one has a gabled brick garage southwest of the house.		5 Other Name(s) 16662 Chesterfield Airport Road
45. Sources of Information St. Louis County Probate Court, 18454.		46. Prepared by E. Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 8/89		49. Revision Date(s)

16662 Chesterfield Airport Road.

43. continued

enough for two houses and a store, which were still owned by Lena at her death in 1946 and were then split into seperate lots. This house was then described as "a one and one-half story six-room brick bungalow type modern dwelling."

92
6-3-74
K CONST. CO
10

LOTS 1-2-3-4
LENA BURKE
SL-AS-020-012

831

PARK

OLIVE

STREET

BURK.

RST JAMES F. & V. D.
6922-1522

1.20 AC
17T22-0069

38'E 224.90'

17T22-0135

.54 AC.
FRANCIS E & VIOLA A.
229.85'

N 0° 18' W 186.01'

96.97'
69.19'

17T22-0058

228.34'

17T22-0058

228.34'

90.95'

192.25'

17T22-0014

143.73'

234.58'

17T22-0014

70:66'

190:62'

2396'

45.55'

101.55'

16660'

16660'

16660'

16660'

7854-2074

FAUCETT CHARLES W JR

N.M. HILL

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074

7854-2074



HISTORIC INVENTORY

1 No 17T220014		4 Present Name(s)		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-11		16666 Chesterfield Airport Road		
6 Specific Location Lot 2 Lena Burkhardt Estate Subdivision 1, Survey 2031, T45 R4		16 Thematic Category		2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1920		
8 Site Plan with North Arrow		18 Style or Design Bungalow 22		
9 Coordinates UTM Lat Long		19 Architect or Engineer		4 Present Name(s)
10 Site II Building ☒ Structure II Object II		20 Contractor or Builder		
11 On National Register? Yes II No ☒		21 Original Use, if apparent residence DIA		
12 Is II Eligible? Yes II No II		22 Present Use residence		5 Other Name(s)
13 Part of Estab Hist Dist? Yes II No ☒		23 Ownership Public II Private ☒		
14 District Potent'I? Yes ☒ No II		24 Owner's Name & Address, if known Philip A. & Patricia Catanzaro		
15 Name of Established District		25 Open to Public? Yes II No ☒		16666 Chesterfield Airport Road
26 Local Contact Person or Organization		27 Other Surveys in Which Included		
28. No. of Stories 1½		29. Basement? Yes ☒ No		
29. Foundation Material concrete 65		30. Wall Construction brick 60		Photo
31. Roof Type & Material gable, comp. 63		32. No. of Bays Front 3 Side 3 DR		
33. Wall Treatment stretcher bond 30		34. Plan Shape rectangular		
35. Changes (Explain in #42) Add: RI Addition: ☒ Moved		36. Condition Interior Exterior good		16666 Chesterfield Airport Road
37. Preservation Underway? Yes No ☒		38. Endangered? By What? Yes II No ☒		
39. Visible from Public Road? Yes ☒ No		40. Distance from and Frontage on Road /76		
41. Further Description of Important Features This house has a front verandah under a roof of slightly lower angle than that of the main house. It has a brick base, parapets, corner posts, and stairs. The frieze and roof ends are covered with a vertical siding. Windows are three-over-one. A side entrance on the east side has a small gabled roof on brackets. The large dormer in front appears to have been resided with vertical siding. It has two three-over-one windows under a front gable, with exposed rafters on the sides. At the rear is a frame porch or verandah (contd)		42. History and Significance The railroad crossroads settlement of Chesterfield got its start in the 1890's when Christian Burkhardt started selling lots on the north side of Olive (now Chesterfield Airport Rd) Son Edward and Edward's wife Lena laid out Burkhardt Place on the south side of the road in 1918. They apparently built some of these houses themselves and sold other lots without houses. Lot 12, at the west end of the subdivision, was large enough for two houses and a store, which were still owned by Lena at her death in 1946 (continued)		16666 Chesterfield Airport Road
43. Description of Environment and Outbuildings This house is one of a row in related styles, all built at the foot of a hill on the edge of the Gumbo Bottom. This is one of the closest in design to the adjacent 16662 Chesterfield Airport Road. A gabled brick two-car garage is southwest of the house.		44. Sources of Information St. Louis County Probate Court, 18454.		
45. Prepared by E. Hamilton		46. Organization St. Louis County Parks		
47. Date 8/89		48. Revision Date(s)		

16666 Chesterfield Airport Road

42. continued

under an extension of the main roof. The brickwork of the house starts right at ground level with a soldier course. Basement windows are above this line.

43. continued

and were then split into separate lots. This house was described then as "a one and one-half story six room brick bungalow type modern dwelling."

92
6-3-74
K. COAST. CO
10

LENA BURK
SL AS 020-013

831

PARK


OLIVE

STREET

BURK.

RST JAMES F. & V. D.
6922-1522

1.20 AC
17T22-0069



38'E 224.90'






Lot 12

17T22-0135
.5416
FRANCIS E & VIOLA A.
229.85'

N 0° 18' W 186.01'



96.97'
69.19'

17T22-0053






7854-2074
FAWCETT CHARLES W JR
92.22'

ORTMANN LAWRENCE A
7245-970
S.E.





7632-1028
CLOUSE, Wm. R.
17T22-0047




KORSKY PAUL W
8295-1526
17T30-0171




75°
178.29'



75°
172.14'



50°
168.04'



50°
162.94'



50°
162.94'





HISTORIC INVENTORY

SL-AS 020-014

1 Title		4 Present Name(s)	
County St. Louis		Farmer's State Bank of Chesterfield	
3 Location of Negatives St. Louis County Parks		5 Other Name(s)	
6 Specific Location Lot 1, Lena Burkhardt Estate		16676-78 Chesterfield Airport Road	
7 City or Town II Rural, Township & Vicinity Chesterfield		16 Thematic Category	
8 Site Plan with North Arrow		17 Date(s) or Period constructed c. 1900	
9 Coordinates UTM Lat Long		18 Style or Design Queen Anne	
10 Site I: I Building ☒ Structure I: Object I: I		19 Architect or Engineer	
11 On National Register? Yes I: I No ☒		20 Contractor or Builder	
12 Is II Eligible? Yes I: I No ☒		21 Original Use, if apparent bank and store	
13 Part of Estab First Dist.? Yes I: I No ☒		22 Present Use residence	
14 District Potent'l? Yes ☒ No I: I		23 Ownership Public I: I Private ☒	
15 Name of Established District		24 Owner's Name & Address, if known Charles W. Fawcett, Jr.	
		25 Open to Public? Yes I: I No ☒	
		26 Local Contact Person or Organization	
		27 Other Surveys in Which Included	
		28 No. of Stories 2	
		29 Basement? Yes ☒ No	
		30 Foundation Material stone	
		31 Wall Construction brick	
		32 Roof Type & Material flat, tar	
		33 No. of Bays Front 4 Side 3	
		34 Wall Treatment pressed metal, stucco	
		35 Plan Shape rectangular	
		36 Changes (Explain in #42) Addition ☒ Altered ☒ Moved	
		37 Condition Interior Exterior fair	
		38 Preservation Underway? Yes No ☒	
		39 Endangered? By What? Yes I: I No ☒	
		40 Visible from Public Road? Yes ☒ No	
		41 Distance from and Frontage on Road /140'	

42 Further Description of Important Features The sides of this building, now stuccoed, are masonry. The front is ornamented with a sheet metal facade. It has half columns framing the windows and a series of metal friezes above and below. The cornice is slightly corbelled out. Windows are 1-over-1. The original storefronts have been replaced by aluminum siding. They each originally had two display windows with bases and transoms. The recessed doors at the center of the building survive. The basement in front is high for a commercial building.

43 History and Significance This building marks the center of the original rural settlement of Chesterfield, 23 miles west of St. Louis, said to have been laid out in 1816. The original town, however, was about half a mile southwest of here on Wild Horse Creek Road. It gradually shifted to its present location as a result of the placement of the railroad. Christian Burkhardt started selling lots on the north side of the road in 1890's. The south side of the road was not laid out in lots, however, until 1918, when Christian's

44 Description of Environment and Outbuildings A concrete block garage is at the rear of the property and at right angles to the front building.

Sources of Information

Gloria Dalton, ed., Heritage of the Creve Coeur Area (1977), p. 57.

St. Louis County Recorder of Deeds, Plat Book 12, p. 94; Plat Book 38, p. 96.

St. Louis County Probate Court, cases 1482, 11575.

45 Prepared by
E. Hamilton47 Organization
St. Louis County Parks48 Date
8/88

49 Revision Date(s)

St. Louis

Farmer's State Bank of Chesterfield

16676-78 Chesterfield Airport Road

Photo

Farmer's State Bank of Chesterfield
16676-78 Chesterfield Airport Road

42. continued

probably to protect against frequent high water. The windows of the east half of the building have been fitted with fixed aluminum sunscreens.

43. continued

son Edward Burkhardt and Edward's wife Lena (actually Clara Helena) laid out Burkhardt Place. This was part of lot 12, which was retained by the family. Edward died in 1934 and Lena in 1946, when her heirs subdivided this remaining property. By then the bank had long been standing. It may be the building shown across the street from the general store in the 1909 atlas. Stylistically it could date from 1890 or earlier, but given the general delay in styles in rural St. Louis County, it more probably dates from around 1900. A photo of the building in its original condition said to date from c. 1920 is in the book, Heritage of the Creve Coeur Area.




SL AS-020-014

PT.
LOTS 1-2-3 RESUB OF LOT 12
LENA BURKHARDT ESTATE



SCALE 1"=60'

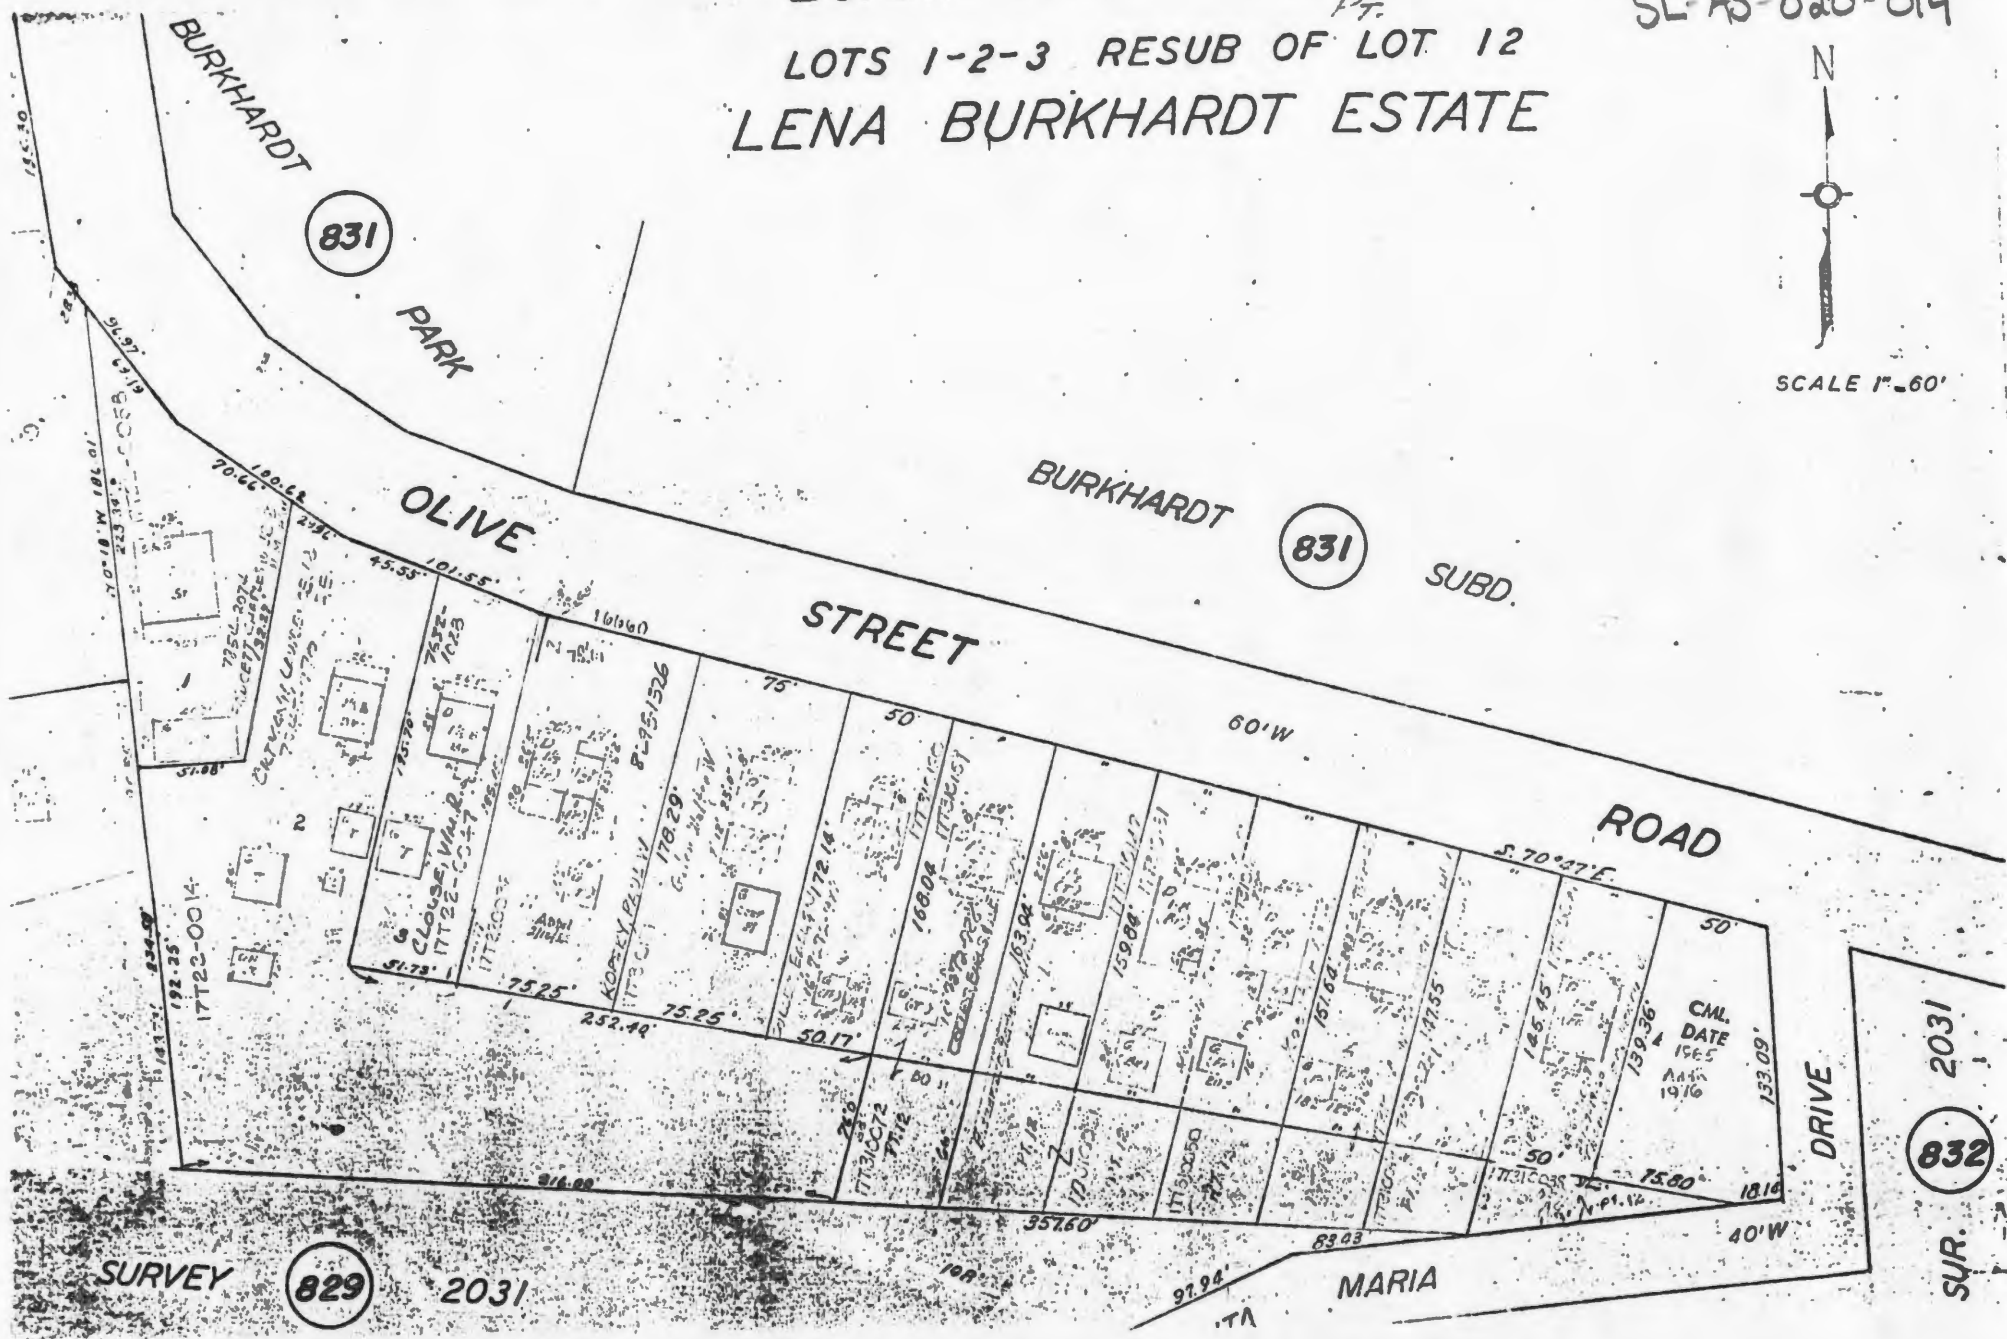

SURVEY

829

2031

2031
832

SUR.

HISTORIC INVENTORY

SL-AS-020-015

1 No 17T220135		4 Present Name(s) John Schonhorst House		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-13		16680 Chesterfield Airport Road		
6 Specific Location part of Lot 12, Burkhardt Place		16. Thematic Category		2. County St. Louis 4. Present Name(s) John Schonhorst House 5. Other Name(s) 16680 Chesterfield Airport Road
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1880's		
8 Site Plan with North Arrow		18. Style or Design vernacular 49		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence DIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Francis E. & Viola A. Konneman 16647 Wild Horse Creek Rd. 63005		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		
10 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		
11. On National Register? Yes ☐ No ☒		28. No. of Stories 1½		
12. Is It Eligible? Yes ☐ No ☐		29. Basement? Yes ☒ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		30. Foundation Material concrete 65		
14. District Potent'l? Yes ☒ No ☐		31. Wall Construction frame 64		
15 Name of Established District		32. Roof Type & Material gable, comp. 63		
		33. No. of Bays Front 3 Side 2		
		34. Wall Treatment asbestos siding 64		
		35. Plan Shape rectangular		
		36. Changes (Explain in #42) Addition ☐ Altered ☒ Moved ☐		
		37. Condition Interior Exterior fair		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road no front		
42 Further Description of Important Features This house has the main entry to the north, away from the road. A basement entry is at the northeast corner. It has a double door. Basement windows are 4-pane casements, others are 2-over-2. The house is built into the side of a hill so that the basement is exposed at one end. The attic has full-size windows in the gable.		Photo		
43 History and Significance Edward and Lena Burkhardt bought the larger tract including this house in 1907 and subdivided it in 1918. They sold the west edge of the property in 1927 to Albert Wilmas. He built the adjacent house at 16686 Chesterfield Airport Road, a bungalow, but this house appears to be older. The earlier history of the tract has not been fully investigated, but it seems to be associated with John F. Schonhorst. (continued)				
44 Description of Environment and Outbuildings The house is approached by a gravel lane off of Chesterfield Airport Road. This lane runs south between 16672 and 16686 Chesterfield Airport Road. The ground to the south and east is steep and wooded, part of the bluffs overlooking the Gumbo Bottom.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 43, p. 86; 145, 602; 181, 243; 202, 518; 878, 439.		46. Prepared by Esley Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 9/89		
		49. Revision Date(s)		

John Schonhorst House
16680 Chesterfield Airport Road

43. continued


he and his wife Annie sold this tract to Drozda Realty in two undivided parts in 1904 and 1906. Although the Schonhorsts then lived in the city, they had been farming here since at least 1889, when they entered into a lease with H. A. Sommers, whose land was east of Wild Horse Creek Road.

831

SL-AS 020 015

GERST JAMES F. & V. D.
6922-1522

1.20 AC
17T22-0069



N 86° 38' E 224.90'

Pt. 2/12

16680

17T22-0135
.54 AC

KONNEMAN, FRANCIS E. & VIOLA A.
229.85'

N 0° 18' W 186.01'

91.97'
69.19'

17T22-0058

228.34'

90.95'

143.73'
234.58'

192.25'

17T22-0014

70.66'

100.62'
299.6'

7854-2074
FAWCEY CHARLES W JR
32.27'

ORTMAN LAWRENCE A
7245-970

N

PARK

OLIVE

STREET

45.55'

101.55'

7632-1028

195.70'

CLOUSE, Wm. R.
17T22-0047

51.75'

17T220036

75.25'

252.40'

KOPKY PAUL W
17T31017

8295-1526

178.29'

75.25'

COLLESS EARLE J
17T22-988

50.17'

17T310072

26.0'

50.11'

16804-17T310160

50'

COLE, Wm. R.
17T310157

50.11'

66'





HISTORIC INVENTORY

1 No 17T220069		4 Present Name(s) Albert Wilmas House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-15		16686 Chesterfield Airport Road		
Specific Location Part of Lot 12 Burkhardt Place		16 Thematic Category	28 No. of Stories 1½	2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1927	29 Basement? Yes ☒ No ☐	
8 Site Plan with North Arrow		18 Style or Design bungalow 22	30 Foundation Material concrete 65	
		19 Architect or Engineer	31 Wall Construction frame WU	4 Present Name(s) Albert Wilmas House
		20 Contractor or Builder	32 Roof Type & Material hip, asphalt HP 63	
		21 Original Use, if apparent residence 017	33 No. of Bays Front 2 Side 3 DR	
		22 Present Use residence	34 Wall Treatment aluminum siding 54	5 Other Name(s) 16686 Chesterfield Airport Road
		23 Ownership Public ☐ Private ☒	35 Plan Shape rectangular	
		24 Owner's Name & Address, if known James F. & Valerie D. Gerst	36 Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐ RI	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒	37 Condition Interior Exterior good	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization	38 Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included	39 Endangered? By What? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☐			40 Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒			41 Distance from and Frontage on Road about 240 ft.	
14 District Potent'l? Yes ☒ No ☐				
15 Name of Established District				
42 Further Description of Important Features Front of house faces a steep slope. It has a verandah with three large square posts but no railing. Above is a large hip-roofed dormer with a modern three-part window. The first floor has a door and a window, both flanked by vertical panels of fifteen panes. Another dormer is on the north side.		Photo		
43 History and Significance This lot was part of the property acquired by Edward and Lena Burkhardt from the Drozda Real Estate Company in 1907 and subdivided by them as Burkhardt Place in 1918. They sold the westernmost 2.834 acres in 1927 to Albert Wilmas, and he probably built this house, although stylistically it could be earlier. The adjacent house at #16680 was also part of Wilmas's purchase, but it was probably built earlier.				
44 Description of Environment and Outbuildings The house is at the top of a steep rise that is an outcropping of the bluffs overlooking the Gumbo Bottom. It is approached from the north by a gravel drive leading off of Chesterfield Airport Road. Another drive skirts the east edge of the property to 16680 Chesterfield Airport Road.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 202, page 518; 878, 439		46 Prepared by E. Hamilton		
		47 Organization St. Louis County Parks		
		48 Date 8/89		49 Revision Date(s)

PTN.

476.23'

356.33'
241.33'

828

LONG EST.

S 0°32'W

192.50' 114.35'
6340-590
173-7/26/63

17T22-0135
.54 AC.
KONNEMAN, FRANCIS E. & VIOLA A.
229.85'

N 86°38'E

224.90'

Pt. L 112

GERST JAMES F. & V. D.
6922-1522

17T22-0069

27' 5' 12'

28' 6' 12' 8'

166.86

223'

N 0°18'W 186.01'

96.97'

69.19'

17T22-0058

228.34'

42'

57'

36.9'

36.9'

40.2'

57.08'

90.55'

7'

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

17T22-0014

192.25'

143.73'

234.58'

831

PARK

OLIVE

ST.

SL-AS-020-016



45.55'

101.55'

59'

76.72'

102.8'

24'

195.70'

51.75'

75.25'

252.40'

75.25'

50.17'

760'

316.00'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'

234.58'

17T22-0036

192.25'

143.73'



HISTORIC INVENTORY

1 No 17T310335		4 Present Name(s) Andrew Kroeger Slaughterhouse <i>not entered</i>		1 No	
2 County St. Louis		5 Other Name(s)		2 County St. Louis	
3 Location of Negatives Wiegand Studio 22A		Wiegand Studio, 16705 Chesterfield Airport Road		4 Present Name(s) Andrew Kroeger Slaughterhouse	
6 Specific Location 2 acres in Survey 2031, T45 R4		16 Thematic Category		28 No. of Stories 1	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1920's		29 Basement? Yes ☐ No ☒	
8 Site Plan with North Arrow		18 Style or Design Vernacular <i>69</i>		30 Foundation Material stone	
		19 Architect or Engineer		31 Wall Construction brick	
		20 Contractor or Builder		32 Roof Type & Material gable, comp.	
		21 Original Use, if apparent slaughterhouse		33 No. of Bays Front irr. Side irr.	
		22 Present Use studio and residence		34 Wall Treatment	
		23 Ownership Public ☐ Private ☒		35 Plan Shape irregular	
		24 Owner's Name & Address, if known Don Wiegand		36 Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☐		37 Condition Interior good Exterior good	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization		38 Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		39 Endangered? By What? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☐				40 Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist.? Yes ☐ No ☒				41 Distance from and Frontage on Road	
14 District Potent'l? Yes ☐ No ☒					
15 Name of Established District					
42 Further Description of Important Features The old part of this house is a rectangular brick structure of about 1,000 square feet. It has a 3-bay front and 1-bay side. The front door is sheltered by a steeply-raked shed roof supported by angled brackets. A rectangular cupola with gable roof stands on the roof ridge. A large addition of modern design is at one end of the house. It has vertical barn wood siding, a cross-gable roof with other roofs at various angles, and many floor-to-ceiling and other fixed-pane windows. Many of the materials (contd)					
43 History and Significance Andrew and Lela Kroeger, according to the wife, had a verbal agreement with the landowner Edmund Andreas to build a brick slaughterhouse to replace a wooden structure in the middle 1920's. At that time they were working at the Chesterfield Mercantile, across the Bonhomme Creek from where the slaughterhouse is located. They bought this property for a dollar in 1938. In 1937 they built a store with residence down the road that faces Highway 40; this is currently the Smoke House Market, purchased in 1965 (continued)					
44 Description of Environment and Outbuildings					
45 Sources of Information Lela Kroeger Carla Boesel, "Dream House" Peter Hernon, "Area sculptor builds 'something people can share'", St. Louis Globe-Democrat, Feb. 1, 1983, p. 131. continued					
46 Prepared by E. Hamilton					
47 Organization St. Louis County Parks					
48 Date 7/89					
49 Revision Date(s)					

St. Louis

Andrew Kroeger Slaughterhouse

16705 Chesterfield Airport Road

Andrew Kroeger Slaughterhouse; Wiegand Studio;
16705 Chesterfield Airport Road

42. continued

in this wing are said to have been salvaged from older buildings, including City House at Taylor and Maryland. One wing of the house is a sculpture studio with an exposed skylighted ceiling and heating from a pot-bellied stove. The interior of the original slaughterhouse has white-painted brick walls, exposed rafters, and an angled brick fireplace. Doors in this part have been enlarged, arched and given thick frames of radiating bricks.

43. continued

by Frank Wiegand. Beginning in 1966, Don Wiegand, Frank's son, renovated the slaughterhouse and built a modern addition onto it. Don is a sculptor and it has become his studio and his residence.

45. continued

St. Louis County Recorder of Deeds, Book 1502, p. 343.

Patricia Degener, "A House From A Dream," St. Louis Post-Dispatch Picture Magazine, (no date).

Gerri Martin, "Don Wiegand," Esprit (Vol. I, No. 1, November 1983), pp. 24-29.

Michael Gold, "Art: Don Wiegand," St. Louis (Vol. 16, No. 5, May 1984) pp. 74-76.

CHESTERFIELD AIRPORT ROAD

SL-AS 020-017 US 40

16806



OLD OLIVE

16705

16676

16655

70' Scaled 7.540.511



Etal

9.60 A.
31. Ac.

State of Mo.
5-3-20-66
INTERSTATE Loc

HIGHWAY

100' W

Fisher William
25-2-21-58
16.49 ACS

17T33-0014

RES.
DATE
11/6/72
WIEGAND, DON F.
17E-3/8/65
8234 J325

101 WIEGAND, FRANK W.
17S-3/8/66
1.59 ACS
25.1'

17T24-0023

PVT. RD.

COUNTY

60' W

ROAD

SEHNERT, THOMAS P.
+ JANE C. H/W

RES. 7999-997
DATE 1/5/72
1.84 AC.

17T24-0034

17T240056
SELLENRIER NEIL
7146-2085
3.30 AC

OLIVE ST.

LONG EST. 806 PTN.

WASCH. CAGO
ST. LOUIS

SCALE 1" = 200'
IMPS 1" = 100'



HISTORIC INVENTORY

SL-AS-020-018

1 No 17T240034		4 Present Name(s) <i>John name</i> Chesterfield Mercantile; The Smoke House		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34081-30		16806 Chesterfield Airport Road		
Specific Location 1.86 acre in Survey 2031 Township 45 Range 4		16. Thematic Category	28. No. of Stories 2½	2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1937	29. Basement? Yes ☒ No ☐	
8 Site Plan with North Arrow		18. Style or Design modified foursquare 69	30. Foundation Material concrete 65	
		19. Architect or Engineer	31. Wall Construction brick 40	4. Present Name(s) Chesterfield Mercantile; Smoke House
		20. Contractor or Builder	32. Roof Type & Material hip, comp 4P HP ft	
		21. Original Use, if apparent residence and store 02F 01A	33. No. of Bays Front irr Side 5 99	
		22 Present Use residence and store	34. Wall Treatment American common bond 30	5. Other Name(s) 16806 Chesterfield Airport Road
		23 Ownership Public ☐ Private ☒	35. Plan Shape irregular	
		24. Owner's Name & Address, if known Thomas P. & Jane C. Sehnert 18400 Wild Horse Creek Road	36. Changes (Explain in #42) <i>DNH</i> Addition: ☐ Altered: ☒ Moved: ☐	
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☒ No ☐	37. Condition Interior Exterior good	
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		26. Local Contact Person or Organization Smoke House Market 532-3314	38. Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included	39. Endangered? By What? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☒			40. Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒			41. Distance from and Frontage on Road /281'	
14 District Potent'l? Yes ☐ No ☒				
15 Name of Established District				
42 Further Description of Important Features Two-and-a-half-story structure with residential space upstairs has broad one-story flat-roofed wings to east and west. Central storefront of four large display windows and center doors has continuous transom of eight panels. It is protected by broad porch with flat roof, wide frieze, and corner brick posts. Above it is a story-high sign with the words "Smoke House" and the profile of a pig. The east wing has a similar storefront of two display windows and six transom lights. It has four side windows		Photo		
43 History and Significance Henry H. Laumeier, the St. Louis real estate investor whose country estate in Sunset Hills is now Laumeier Sculpture Park, sold 90 acres here in 1901 to Edmund P. Andreas. Andreas still owned the property in 1936 when the county paid him \$250 for a right-of-way to connect Olive Street Road with the new right-of-way for U.S. 40. This is now the north-south stretch of Chesterfield Airport Road. In 1933 and 1934, the				
44 Description of Environment and Outbuildings The front yard is now a parking lot, as is most of east side. Rerouting of Olive and Chesterfield Airport Roads has put building at an important corner where most traffic turns.				
45 Sources of Information Thomas P. Sehnert (has photos of opening day) St. Louis County Recorder of Deeds, Book 127, page 498; 1434, 260; 1463, 61		46. Prepared by E. Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 8/89		
		49. Revision Date(s)		

Chesterfield Mercantile; The Smoke House
16806 Chesterfield Airport Road

42. continued

alternating with three smaller signs. The front of the west wing has been modernized with two doors and a semi-octagonal bay window. Roof parapets of the two wings are capped with rounded tiles. The upper windows are mostly one-over-one, but the paired windows in the front hipped dormer are three-over-one. An outside chimney rises from the east side, and two other chimneys are visible, a two-story ell of the main block has a north-facing sunroom.

43. continued

Andreas family had already sold land to the state for the right-of-way of the new Highway 40. Andreas sold this now valuable corner in 1937 to Andrew H. and Lela A. Kroeger, who built this new store and residence. The Kroegers had previously operated the general store in the old center of Chesterfield. Mr. Kroeger died in 1943, but Mrs. Kroeger and her daughter Ruth Ann continued to run the business until they sold the property to Frank W. and Claire M. Wiegand in 1965. The Wiegands operated the Smoke House here for more than 20 years, then sold in 1986 to their daughter Jane C. and her husband Thomas P. Sehnert, who have continued the business. The Smoke House is significant in the context of St. Louis County history both as a late example of a rural store and as an early example of a highway-oriented business.

839

. Etal

~~9/50 A~~
9/51 Ac

1478.5-010

5614 OF No.
9-3-26-68
INTERSTATE

HIGHWAY

COUNTY

ROAD

OLIVE ST

LONG EST.

PTN.



SCALE 1" = 200'
IMPS 1" = 100'

31



HISTORIC INVENTORY

SL-AS-020-019

1 No probably 17U240022		4 Present Name(s) Philip A. Steffan House		1 No	
2 County St. Louis		5. Other Name(s)		2. County St. Louis	
3 Location of Negatives 34104-8		17450 Chesterfield Airport Road		4. Present Name(s) Philip A. Steffan House	
6 Specific Location 28.71 acres/1-2-3-4 Lots in Steffen Estate		16. Thematic Category 030		28. No. of Stories 2	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1900		29. Basement? Yes ☒ No ☐	
8 Site Plan with North Arrow		18. Style or Design vernacular 12		30. Foundation Material stone 40	
		19. Architect or Engineer		31. Wall Construction frame, possibly log	
		20. Contractor or Builder		32. Roof Type & Material gable, comp 6B 63	
		21. Original Use, if apparent residence DIA		33. No. of Bays Front 3 Side 1	
		22 Present Use vacant		34. Wall Treatment asphalt siding 63	
		23 Ownership Public ☐ Private ☒		35. Plan Shape rectangular	
		24. Owner's Name & Address, if known Richard J. Slaies et al Trustees 222 S. Central Avenue Suite 506		36. Changes (Explain in #42) Addition ☒ Moved ☒	
9 Coordinates Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior poor	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☒ No ☐ development	
12. Is It Eligible? Yes ☐ No ☐				40. Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒				41. Distance from and Frontage on Road /648'	
14. District Potent'l? Yes ☐ No ☒					
15 Name of Established District					
42 Further Description of Important Features Simple house has short six-pane windows in partial second story, six-over-six windows with metal awnings elsewhere. The front porch has nearly equilateral front gable on four thin posts. A small brick chimney rises at the center of the roof ridge.		Photo		5 Other Name(s) 17450 Chesterfield Airport Road	
43 History and Significance This house is on part of a larger tract of land that was purchased by Peter Steffan in 1857 and subsequent years. He died in 1892, and in 1895 the property was divided into 7 long narrow strips for the benefit of his heirs. Lots 1 and 2 were assigned to Elizabeth B. Kroenung, the wife of the nearby property owner Cosmo Damian Kroenung. She had acquired the rights of Peter Steffan's son Hartman the previous year.					
44 Description of Environment and Outbuildings The house is becoming overgrown and has lost all outbuildings.					
45 Sources of Information St. Louis County Probate Court 950 St. Louis City Recorder of Deeds, Book 182, page 23; 187, 30; 337, 24 St. Louis County Recorder of Deeds, Book 77, page 314; 80, 457		46. Prepared by E. Hamilton		47. Organization St. Louis County Parks	
		48. Date 8/89		49. Revision Date(s)	

Phillip A. Steffan House
17450 Chesterfield Airport Road


43. continued

A short time later, however, she must have sold her rights to Philip A. Steffan, who appears to have been a grandson of Peter by his deceased son Jacob. The 1909 Atlas has the lot numbers reversed, showing this house on Lot 6 instead of Lot 2. The house could have been built earlier in the century, but it has been assigned here to Philip because it is situated as though in recognition of the subdivision lines.

100'W

HIGHWAY

1	14
15	16
17	18
19	20



PARCEL B
28.71 AC. 0.5
17U24-0022
SLAIS, RICHARD J ETAL TR.
6842-898

17U23-0133
LIBERMANN, PIERCE & DORIS
8217-630
7.00 AC.

PARCEL A
17U21-0058
SHAW, JOHN L. ETAL
SHARE 4 8217-636
6.70 AC.

17U21-0
Rockwood R.R.
6921-

793

2266.84'

1960'±

1040'±

697.79'

766.46'

1591'±

SHARE 3

825'±

1004'±

397.89'

397.89'

766.46'

1433'±

667'±

BONHOMME

PT. OF SU
125

294'±

194'±



HISTORIC INVENTORY

SL-AS-020-020

1 No 17U230034		4 Present Name(s) former [motor court cabin]		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34103-26		17516 Chesterfield Airport Road		
6 Specific Location 1.11 acres in part of Lot 7, Peter Steffan Estate in Survey 126, T45 R4		16. Thematic Category		2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1940		
8 Site Plan with North Arrow		18. Style or Design vernacular 69		
		19. Architect or Engineer		4 Present Name(s) Former motor court
		20. Contractor or Builder		
		21. Original Use, if apparent motor court 01D		
		22 Present Use antique store		4 Present Name(s) Former motor court
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Patricia Keefe 9 Berkshire Drive St. Louis, MO 63117		
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☒ No ☐		4 Present Name(s) Former motor court
0 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization Maida Village Antiques 532-4270		
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		
12 Is It Eligible? Yes ☐ No ☐				5 Other Name(s) 17516 Chesterfield Airport Road
13 Part of Estab Hist Dist? Yes ☐ No ☒				
14. District Potent'l? Yes ☐ No ☐				
5 Name of Established District				5 Other Name(s) 17516 Chesterfield Airport Road
12 Further Description of Important Features Main building is frame but has siding resembling logs in front. Other elevations are asbestos shingled. A side entrance at the east end has a front-facing door and a gable side window. Windows are eight-over-eight. One of the front windows is a large plate-glass display window. The door is sheltered by a gable roof supported by unpainted posts.		37. Condition Interior Exterior fair		
13 History and Significance U. S. 40 was laid out along the old right-of-way of Olive Street Road in 1934 and soon attracted highway-oriented businesses, of which the Smoke House and the Airport Road Cafe are other survivors. This motel seems to have been built about the same time, but county directories of the period do not give information for locations this far west.		38. Preservation Underway? Yes ☐ No ☒		
14 Description of Environment and Outbuildings Two "log" cabins stand behind and to either side of the main structure. The east one now houses Pete's Trucking and the Greentree Transportation Company. They are five bays by two, with bracketed hooks over the center doors.		39. Endangered? By What? Yes ☐ No ☒		5 Other Name(s) 17516 Chesterfield Airport Road
15 Sources of Information Patricia Keefe		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /136		
		46. Prepared by E. Hamilton		5 Other Name(s) 17516 Chesterfield Airport Road
		47. Organization St. Louis County Parks		
		48. Date 8/89		
		49. Revision Date(s)		5 Other Name(s) 17516 Chesterfield Airport Road

SL-AS 020-020

SHARE 5

17U23

BARKEN-DUBINSKY PARTNER

7689-1229

15.11 AC

40

ROAD

AIRPORT

100' W

CHESTERFIELD

CHWY

795

293.52'

342.15'

TRACT OF LAND

PLAT 2 1.74 AC
17U23-0201

BARKEN
DUBINSKY PARTNER
7689-1209

1.27 ACRES
17U23-0111

SH. 6

17U23-0090
3.43 AC.

137-39-41-43-45-4
149-51-53-55-57-59-
230'

220.03'

451.75'

KEEFE, PATRICIA D
7480-2081

1.11 AC
17U23-0034

POHLMAN, K L & M
7172-471

SHARE 7

Budde, Donald F. & ANN C.
6709-1617 1/21/74

17U14-0120

1.46 AC

4.73 AC

17U23-0078

17U14-0131

DEMAT, PAUL P. & MARTHA L.
76251-0753

1.93 AC

17U14-0115

DEMAT, PAUL J. & MARIE H.
17U14-0076

546.14'

462.53'
456.09'

17U14-0285

LONG INVESTMENT CO.

8278-1129

8.08 AC.

17U14-0102

KOOL-TUNIORG. & BEVERLY J. 7086-1129

IND

DATE 1979

50043

3.31'

478.61'

667.61'

987'

377.31'

32.84'

64.92'

37.84'

238.51'

11.88° 29'

242.00'

125.56'

8.62'

12.93'

25.70'

35.5'

35.5'

180.48'

316.48'

652' ±

177.31'

104'

189'

104'

175'

104'

104'

104'

104'

104'

104'

104'

104'

104'

104'

104'

104'

104'

104'

104'



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY SL-AS-020-021

1 No 17U510039	4 Present Name(s) Airport Road Cafe	1 No	
2 County St. Louis	5 Other Name(s) 17519 Chesterfield Airport Road House		2 County St. Louis
3 Location of Negatives 34103-29			

6 Specific Location 7.11 acres, part of Lot 7, Peter Steffan Estate	16. Thematic Category 17 Date(s) or Period constructed c. 1925	28. No. of Stories 1½ -1 29. Basement? Yes ☐ No ☒ not evident	5 Other Name(s) 17519 Chesterfield Airport Road
7 City or Town If Rural, Township & Vicinity Chesterfield	18. Style or Design Craftsman 18	30. Foundation Material not evident	
8 Site Plan with North Arrow	19. Architect or Engineer	31. Wall Construction frame wu	
	20. Contractor or Builder	32. Roof Type & Material HPGB hip, gable, comp. GB	
	21. Original Use, if apparent residence DIA 026	33. No. of Bays Front irr.3 Side irr.	
	22 Present Use restaurant & service station	34. Wall Treatment shingle, painted 22	
	23 Ownership Public ☐ Private ☒	35. Plan Shape irregular	
	24. Owner's Name & Address, if known Save Gasoline Corp. One Mercantile Center, Suite 3503 St. Louis MO 63101	36. Changes (Explain in #42) DB AW Addition: ☒ Moved ☐	
9 Coordinates UTM Lat Long	25. Open to Public? Yes ☒ No ☐	37. Condition Interior Exterior good	
10 Site: ☒ Building ☒ Structure: ☐ Object: ☐	26. Local Contact Person or Organization Airport Road Cafe 532-0339	38. Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒	27. Other Surveys in Which Included	39. Endangered? By What? Yes ☐ No ☒	
12 Is Eligible? Yes ☐ No ☒		40. Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒		41. Distance from and Frontage on Road /297	
14 District Potent'l? Yes ☐ No ☒			
15 Name of Established District			

12 Further Description of Important Features **This very picturesque gas station and cafe has pyramidal roof with gable roofed wing to front and wide gable-roofed dormer on side. Oriel-like shingled extensions on both the main block and front section are also gabled. A long wing at the west end has a three-part picture window like the two-part one under the gabled wing; both have aluminum awnings. The west wing also has an extension beyond it. The main entry has an X-paneled and glazed door sheltered by a low gabled roof (continued)**

13 History and Significance **This lot was part of the Peter Steffan estate which was subdivided as the result of a suit brought by Elizabeth Kroenung. This part was acquired by Damian C. Kroenung. He sold 7.7 acres to John and Sophie Pujol in 1924, and they sold the same property to Edwin R. and Katie Lee Fryer in 1928. The Fryers added the larger tract to the east in 1933. By 1935, the original tract had been acquired by Evelyn Vogt of the city. She sold the property to three Fryers, presumably sons of the original buyers: (continued)**

14 Description of Environment and Outbuildings **Gasoline pumps are located to the east of this building, connected by a continuous parking area.**

Photo

15 Sources of Information St. Louis County Recorder of Deeds, Book 80, p. 457; 684, 29; 937, 160; 1256, 294; 1350, 248; 3480, 469.	46. Prepared by E. Hamilton
	47. Organization St. Louis County Parks
	48. Date 8/89
	49 Revision Date(s)

Airport Road Cafe
17519 Chesterfield Airport Road

42. continued

supported by two slender posts and antae. A three-part window under the gable is six-over-six.

43. continued

Edwin R. Fryer and his wife Flossie Mae, John Leroy Fryer and his wife Ina Grace, and Paul Clarence Joseph Fryer and his wife Grace D. These people owned the property until 1955, when they sold it to Barbara Houser of St. Louis. If the building was constructed as a residence, as the present manager of the Cafe says, it was probably built by the Pujols. It must have been used as a restaurant prior to 1955, and perhaps throughout the ownership of the Fryer children. More research is needed on this attractive structure.



HISTORIC INVENTORY

1 No 17U140153		4 Present Name(s) Old Twenty-Five Mile House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34081-33		17558 Chesterfield Airport Road		
6 Specific Location pt. Lot 4 John L. Long Estate in Survey 126 T45 R4		16. Thematic Category		2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1906		
8 Site Plan with North Arrow		18. Style or Design Vernacular		
9 Coordinates UTM Lat Long		19. Architect or Engineer		4 Present Name(s) Old Twenty-Five Mile House
10 Site : : Structure : : Building : : Object : :		20. Contractor or Builder		
11. On National Register? Yes : : No : X		21. Original Use, if apparent hotel? <u>OLD DIA 026</u>		
12. Is It Eligible? Yes : : No : : X		22 Present Use tavern		17558 Chesterfield Airport Road
13 Part of Estab Hist Dist.? Yes : : No : X		23 Ownership Public : : Private : X		
14. District Potent'l? Yes : : No : : X		24. Owner's Name & Address, if known William F. Human, Jr., et al, 130 South Bemiston Ave. Clayton, MO 63105		
15 Name of Established District		25. Open to Public? Yes : X No : : X		5 Other Name(s) 17558 Chesterfield Airport Road
42. Further Description of Important Features		26. Local Contact Person or Organization JB's Corner 537-2410		
43 History and Significance		27. Other Surveys in Which Included		
44 Description of Environment and Outbuildings		28. No. of Stories 2		Photo
45 Sources of Information		29. Basement? Yes : : No : : X		
46. Prepared by E. Hamilton		30. Foundation Material not evident		
47. Organization St. Louis County Parks		31. Wall Construction frame <u>WU</u>		8/89
48. Date		32. Roof Type & Material hip, comp. <u>HP W3</u>		
49 Revision Date(s)		33. No. of Bays Front 4 Side 3		
48. Date		34. Wall Treatment clapboard, siding		8/89
49 Revision Date(s)		35. Plan Shape rectangular		
48. Date		36. Changes (Explain in #42) <u>prh</u> Addition : X <u>AW</u> Altered : X <u>Moved</u> : X		
49 Revision Date(s)		37. Condition Interior Exterior <u>fair</u>		8/89
48. Date		38. Preservation Underway? Yes : : No : X		
49 Revision Date(s)		39. Endangered? By What? Yes : X No : : X development		
48. Date		40. Visible from Public Road? Yes : X No : : X		8/89
49 Revision Date(s)		41. Distance from and Frontage on Road /212		
48. Date		42. Further Description of Important Features		
49 Revision Date(s)		43 History and Significance		8/89
48. Date		44 Description of Environment and Outbuildings		
49 Revision Date(s)		45 Sources of Information		
48. Date		46. Prepared by		8/89
49 Revision Date(s)		47. Organization		
48. Date		48. Date		
49 Revision Date(s)		49 Revision Date(s)		8/89
48. Date		48. Date		
49 Revision Date(s)		49 Revision Date(s)		

Old Twenty-Five Mile House
17558 Chesterfield Airport Road

42. continued

Other signs are on the west wall and in the windows. In front is a small planting area with two signs on a freestanding post.

43. continued

and established the hotel adjacent in 1906. Andrew, called A.J., sold out his interest to his brother in 1901 and moved to Pond, where he established a successful general store of his own. Henry J., born in 1878, maintained control of this property at least through 1921. The business was called the Twenty Five Mile House because it was 25 miles from downtown St. Louis.

BOOK

[illegible]




Budweiser
Brewery of Beers

JB
CORNER
100% BAR
100% BEER
100% FUN
100% FREE

ENJOY OUR DAILY SPECIALS
IN OUR COOL SHIN ROOM
FEATURING FRIAY!
THE 710 BAND!

ICE
CREAM

HISTORIC INVENTORY

1 No 17U410027		4 Present Name(s) England-Waggener House		1 No 2 County St. Louis	3 Location of Negatives 34081-34
2 County St. Louis		5 Other Name(s) 17617 Chesterfield Airport Road			
3 Location of Negatives 34081-34					
6 Specific Location 23.61 acres, part of Lots 2 & 3, D. Kroenung Estate in Survey 1010, T45 R3		16. Thematic Category		2. County St. Louis 63 4 Present Name(s) England-Waggener House	5 Other Name(s) 17617 Chesterfield Airport Road
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1920's			
8 Site Plan with North Arrow		18. Style or Design Bungalow 22			
		19. Architect or Engineer			
		20. Contractor or Builder			
		21. Original Use, if apparent residence OIA			
		22 Present Use residence			
		23 Ownership Public ☐ Private ☒			
		24. Owner's Name & Address, if known Airport Tract Joint Venture/ 13 Dromara Road St. Louis, MO 63124			
		25. Open to Public? Yes ☐ No ☒			
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		28. No. of Stories 1½	
10 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		29. Basement? Yes ☒ No ☐	
11. On National Register? Yes ☐ No ☒		12. Is It Eligible? Yes ☐ No ☐		30. Foundation Material concrete 65	
13 Part of Estab Hist Dist.? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☐		31. Wall Construction frame 60	
15 Name of Established District				32. Roof Type & Material HP 68 hip, gable, comp.	
				33. No. of Bays Front 4 Side 5	
				34. Wall Treatment clapboard 21	
				35. Plan Shape irregular	
				36. Changes (Explain in #42) Addition: ☒ Altered: ☐ Moved: ☐	
				37. Condition Interior fair Exterior fair	
				38. Preservation Underway? Yes ☐ No ☒	
				39. Endangered? By What? Yes ☒ No ☐ development	
				40. Visible from Public Road? Yes ☒ No ☐	
				41. Distance from and Frontage on Road	
42. Further Description of Important Features This house is a good example of bungalow styling in this area. It badly needs repainting but is otherwise in good shape and largely unaltered. The front porch includes the gable end of the attic, lighted by paired windows. It also has square posts and square balusters. Windows are mostly six-over-one but vary in height and width. The lintel of the porch continues around the side of the house as the window lintel, but there are several courses of clapboards above it. A brick chimney rises (cont'd)					
43 History and Significance The 1909 county atlas shows this property belonging to Charles C. England and a house on the site. Judging by the style of this house, however, it is more likely to have been built in the late teens or early twenties. In 1911 James R. England, whose relation to Charles is unknown, sold an undivided half interest in this property to W. H. Waggener of Jefferson County. Waggener retained his interest through at least 1921, (cont'd)					
44 Description of Environment and Outbuildings In the nineteenth century, Wild Horse Creek opened up into Gumbo Lake across the north part of this property and parallel to Olive Street. The Missouri River later broke into the creekbed farther to the west, and the lake dried up. U.S. 40 occupies part of that space today, making this intersection with Long Road very valuable					
45 Sources of Information St. Louis County Recorder of Deeds, Book 281, p. 174.				46. Prepared by E. Hamilton	
				47. Organization St. Louis County Parks	
				48. Date 8/89 49. Revision Date(s)	

England-Waggener House
17617 Chesterfield Airport Road

42. continued

asymmetrically on the east wall of the house. It is flanked by two casement windows with eight-pane leaves. The basement stands well above the ground, with several horizontal windows exposed.

43. continued


so he may have been responsible for building this house. Further research is needed.

44. continued

for redevelopment.

2019.4

SL-AS-020-023

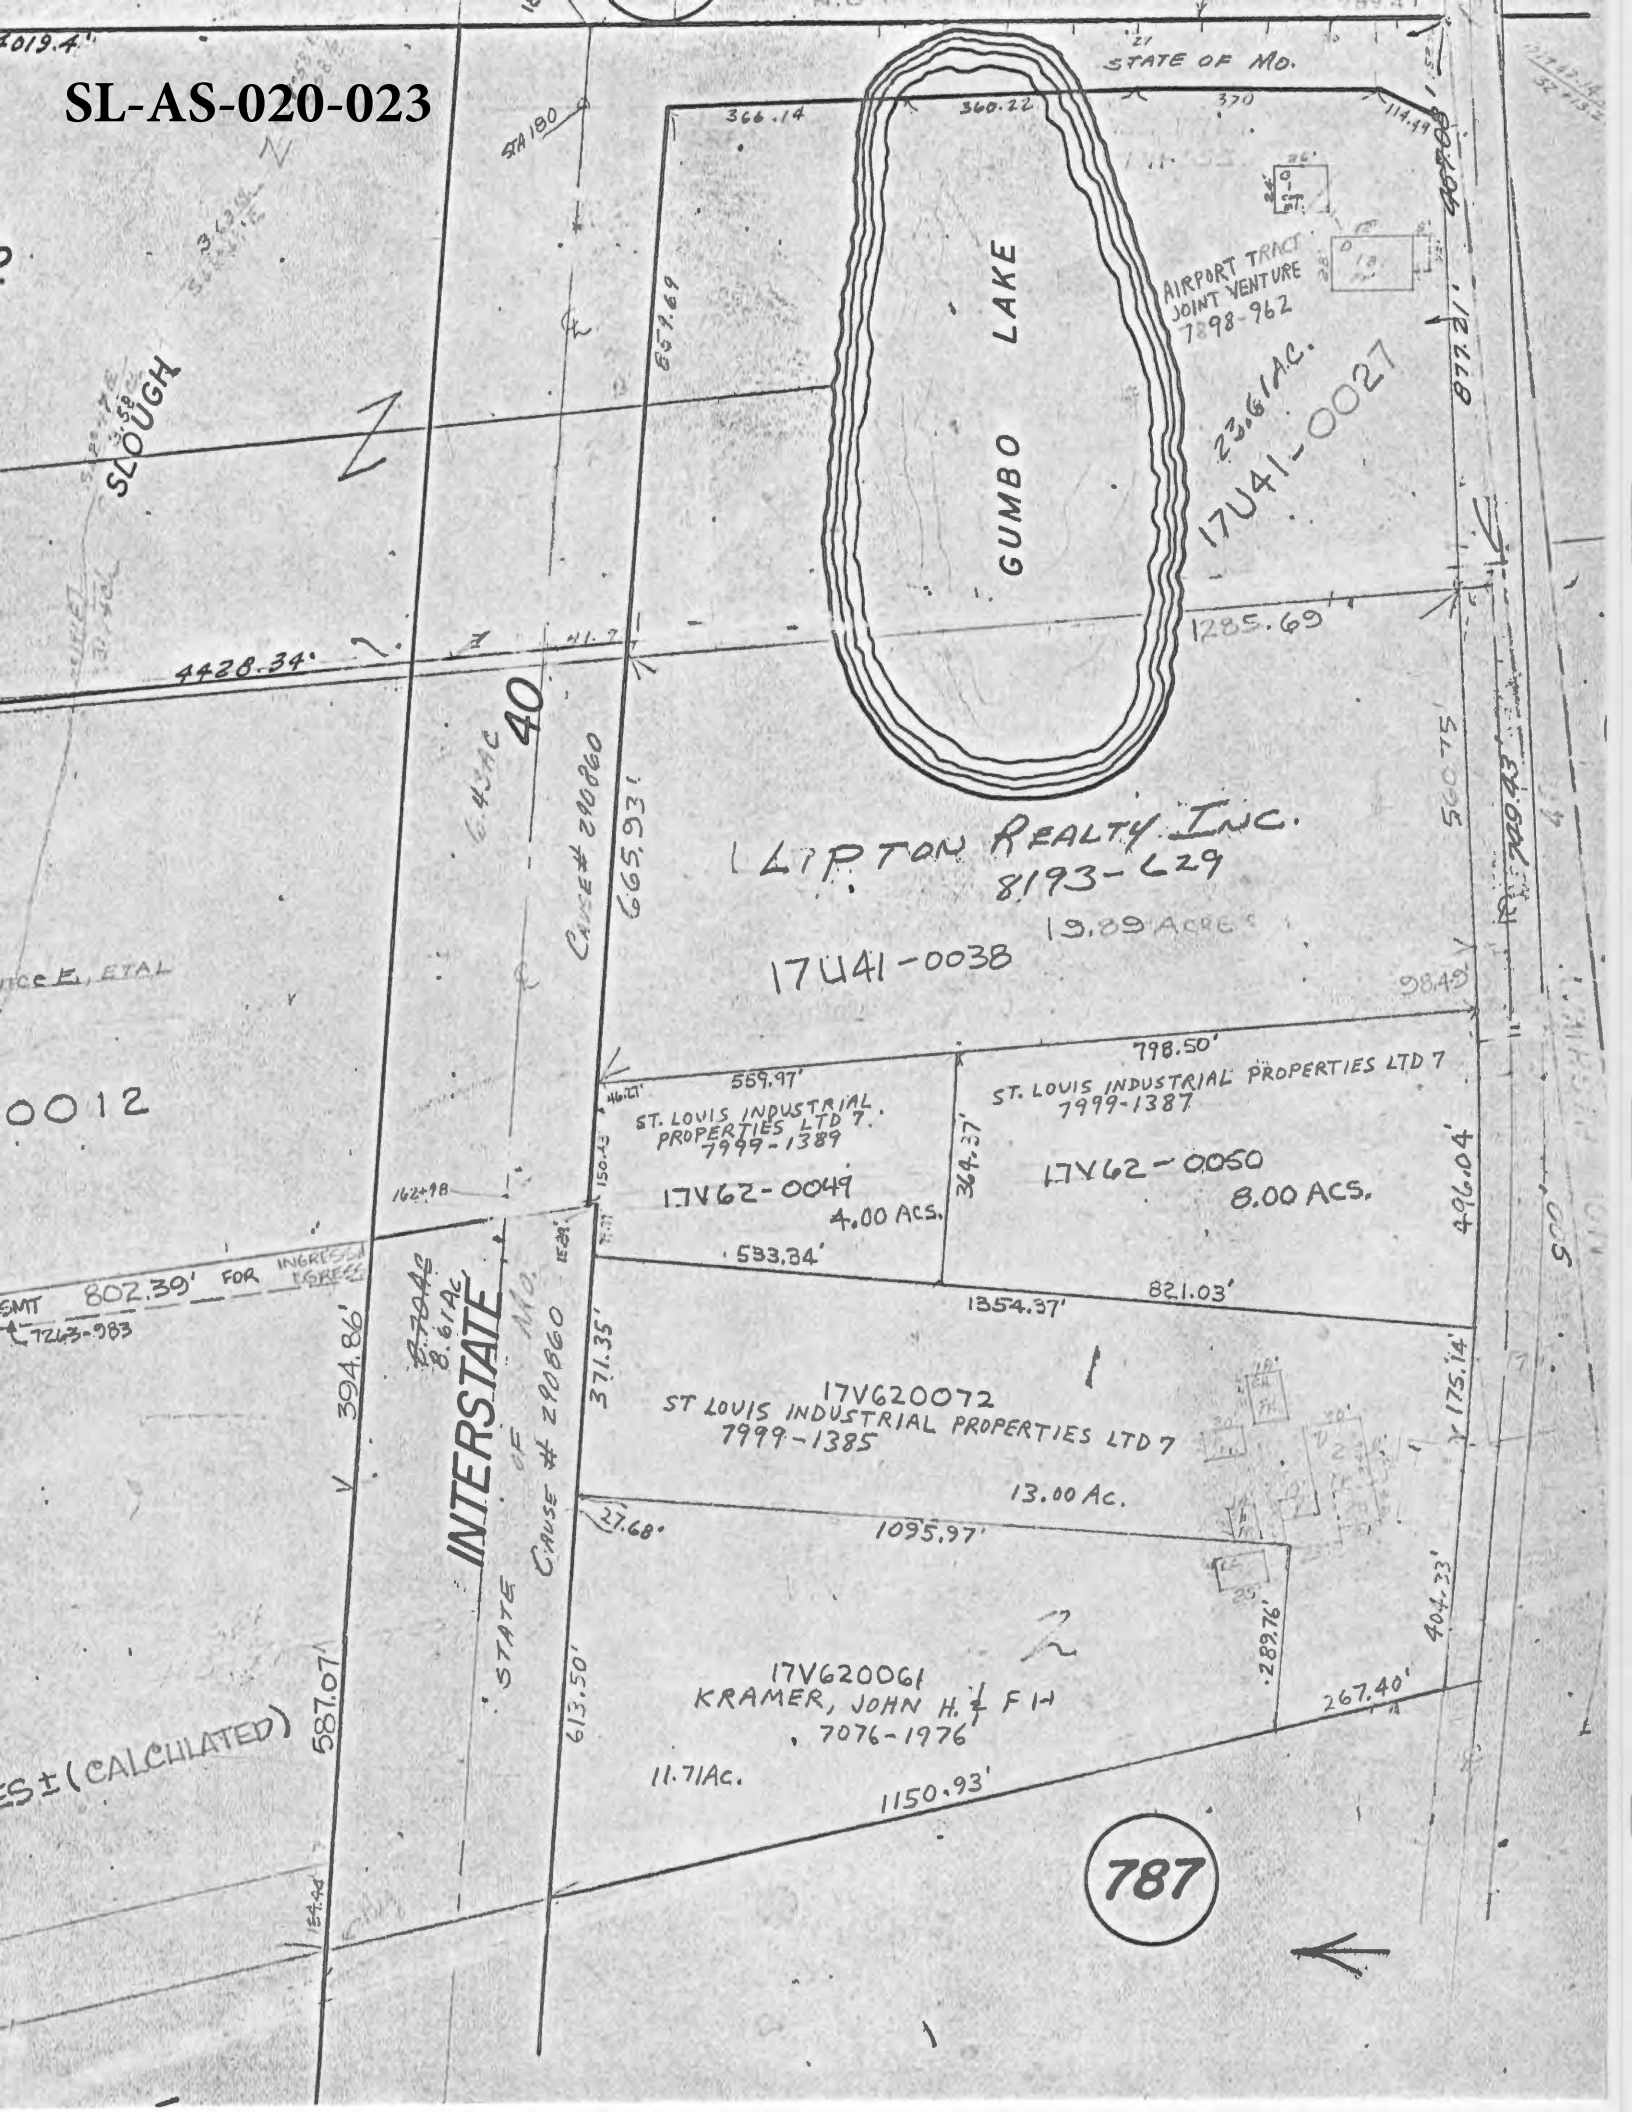



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-024

1 No 17V330012		4 Present Name(s) Louis F. Abel House		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34104-19		17839 Chesterfield Airport Road		
6 Specific Location SE part of Lot 1, Tyler Estate in Survey 419, T45 R3		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed c. 1921		
7 City or Town If Rural, Township & Vicinity Chesterfield		18. Style or Design bungalow 22		
8 Site Plan with North Arrow		19. Architect or Engineer		
		20. Contractor or Builder		
9 Coordinates UTM Lat Long		21. Original Use, if apparent residence OIA		
10 Site Building ☒ Structure ☐ Object ☐		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
11 On National Register? Yes ☐ No ☒		24. Owner's Name & Address, if known Mary Lucy Dunker		
12 Is It Eligible? Yes ☐ No ☐		25. Open to Public? Yes ☐ No ☒		
13 Part of Estab Hist Dist? Yes ☐ No ☒		26. Local Contact Person or Organization		
14. District Potent'l? Yes ☐ No ☒		27. Other Surveys in Which Included		
15 Name of Established District		28. No. of Stories 1 1/2		4 Present Name(s) Louis F. Abel House
		29. Basement? Yes ☒ No ☐		
		30. Foundation Material concrete 65		
		31. Wall Construction frame Wu		
		32. Roof Type & Material hip, comp HD 63		
		33. No. of Bays Front 2 Side 3		
		34. Wall Treatment clapboard 21		
		35. Plan Shape rectangular		
		36. Changes (Explain in #42) Addition: ☒ Moved ☐ R1		
		37. Condition Interior Exterior fair		
		38. Preservation Underway? Yes ☐ No ☒		5 Other Name(s) 17839 Chesterfield Airport Road
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /172'		
42 Further Description of Important Features This house is badly in need of paint. Half of the front is a series of four windows of unusual design, casements with center panes outlined by thin muntins and smaller glass borders. The other half is a screened porch with clapboard parapet. Large front dormer of three windows continues the gable line of side roof panels. Side dormer has one window and clapboard sides. West side of house has an oriel in last bay, with a low roof tucked under overhang of main roof. The front window on this side		Photo		
43 History and Significance Fred L. Kerth sold 60 acres here in 1912 to Matilda M. Link. She sold it to Frank Tegethoff in 1915, and he sold it in turn to David L. Remley a month later. In 1919 Remley sold the property to Oscar O. Dunham, and Dunham sold to Louis F. Abel in 1921. Abel kept the property at least through 1930, so he was probably responsible for construction of this house.				
44 Description of Environment and Outbuildings This property has the number 17831 in county records.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 49, p. 445; 216, 345; 292, 279; 368, 292; 378, 84; 442, 350; 523, 503.		46. Prepared by E. Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 8/89		
		49. Revision Date(s)		

Louis F. Abel House
17839 Chesterfield Airport Road

42. continued

also has unusual muntin pattern.



HISTORIC INVENTORY

1 No 19V330069		4 Present Name(s) West-Gumbo Cemetery		1 No St. Louis
2 County St. Louis		5 Other Name(s) 17200 Church Road		
3 Location of Negatives				
6 Specific Location 1 acre in SE corner of NW 1/4 Section 13, Township 45, Range 3		16. Thematic Category		2. County St. Louis 4 Present Name(s) West-Gumbo Cemetery 5 Other Name(s) 17200 Church Road
7 City or Town If Rural, Township & Vicinity Meramec Township		17 Date(s) or Period started 1868		
8 Site Plan with North Arrow		18. Style or Design rural cemetery		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent cemetery 07B		
		22 Present Use cemetery		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Union Baptist Church, Inc. 17033 Church Road		
		25. Open to Public? Yes ☒ No ☐		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		
0 Site ☒ Building ☐ Structure ☐ Object ☐		27. Other Surveys in Which Included		
11 On National Register? Yes ☐ No ☒		12. Is It Eligible? Yes ☐ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		
15 Name of Established District		28. No. of Stories		
		29. Basement? Yes ☐ No ☐		
		30. Foundation Material NA		
		31. Wall Construction		
		32. Roof Type & Material		
		33. No. of Bays Front Side		
		34. Wall Treatment		
		35. Plan Shape		
		36. Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐		
		37. Condition Interior Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road at end of road		
12 Further Description of Important Features The cemetery is very rolling and has a number of large trees. Monuments are mostly small and low-lying and are irregularly scattered over the terrain. The visible stones are predominantly twentieth century in date and include several indicating the continued use of the cemetery. It is well-maintained and shows evidence of attention to individual graves.		Photo		
13 History and Significance Currently the church owns four different parcels of land at the end of Church Road. The oldest is the one designated by county locator number 19V610097, which was conveyed on February 15, 1868, from James and Polly Ellis and Philip and Clara Winston (also written Wenstone) to members of the Colored African Baptist Church of St. Louis County, Missouri. It is one square acre and was reserved for use as a cemetery. A second acre to the west of the first was deeded May 5, 1980 (Book 7302, p. 2249) by cont'd				
14 Description of Environment and Outbuildings The cemetery is situated at the end of Church Road on a hill overlooking Wildridge Drive and the hills leading down to the Gumbo Bottom. On the south side of the road and east of the cemetery are a parking lot and modern church building.				
15 Sources of Information St. Louis County Recorder of Deeds, Book 572, p. 590; 7302, 2249; 7306, 1353 and 1356. St. Louis County Probate Court, #8784.		46. Prepared by Esley Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 9/89		
		49. Revision Date(s)		

West-Gumbo Cemetery
17200 Church Road

43. continued

Aleene Cole Atwater, her husband Hosea Atwater, and Maceola Cole. This has the locator number 19V520028. The recent location of the church, the present parking lot, has the locator 19V330058. It is the half-acre sold on August 25, 1922 (Book 572, p. 590), by Henry and Ida Jefferson to three trustees of Union Baptist Church, Menter Jefferson, Eugene Davis, and William Hawkins to be used for church purposes only. On September 27, 1979, the Monsanto Company sold the church a one-acre tract immediately south of the 1922 lot measuring 130 by 335 feet.

The church itself is said to have been founded before the Civil War and has a continuous history since that time, including several buildings. Purchase of the lot from the Monsanto Company permitted construction of the present church building.

The cemetery is now named for John W. West who bought the land east of the cemetery in the 1890's and who died in 1928. That tract had previously been part of the estate of Nicholas Long.

702

703
B

CHURCH RD

104.37' 230.75' 94.37'
10.00' 18V33-C058
335.12'
130.06' 104.37' 130.06'
18V33-C069 INT.
1 ACRE, 7806-1253
572-510 DA.
335.12' EASE
DATE 12/27/11

SL AS-020-025

WILDHORSE VILLAGE G

SEE 7006-G

WILDHORSE VILLAGE H

SEE PAGES 700H-J

WILDRIDGE DRIVE

DRIVE

(50' W)

WILDHORSE PARKWAY

SHELL OIL CO.
8252-393

PT. 197.06 Acs

555'

PT. OF

Retainer: 19X210224



HISTORIC INVENTORY

1 No 21R440183		4 Present Name(s) William Seiler House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 33015-36		14685 Clayton Road at Straub Road		
6 Specific Location 1 acre, Lot 5 Ridgedale Acres		16 Thematic Category		2 County St. Louis 4 Present Name(s) William Seiler House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1898		
8 Site Plan with North Arrow		18 Style or Design Vernacular 49		
		19 Architect or Engineer		
		20 Contractor or Builder		
		21 Original Use, if apparent residence DIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Roger E. & Barbara Frischkorn Ballwin, MO 63011		
		25 Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26 Local Contact Person or Organization		3 County St. Louis 5 Other Name(s) 14685 Clayton Road at Straub Road
10 Site ☐ Building ☒ Structure ☐ Object ☐		27 Other Surveys in Which Included		
11 On National Register? Yes ☐ No ☒		28 No. of Stories 2-1-1		
12 Is It Eligible? Yes ☐ No ☐		29 Basement? Yes ☒ No ☐		
13 Part of Estab Hist Dist.? Yes ☐ No ☒		30 Foundation Material probably stone 40		
14 District Potent'l? Yes ☐ No ☒		31 Wall Construction frame wu		
15 Name of Established District		32 Roof Type & Material gable, Comp. CBGBA 63		
		33 No. of Bays Front 3+3 Side 2		
		34 Wall Treatment clapboard 21		
		35 Plan Shape irregular		
42 Further Description of Important Features The house is a concatenation of gabled parts of varying heights, reminiscent of a New England farmhouse. The main part, which appears to be the oldest, has three bays of two-over-two shuttered windows. The front door has narrow side-lights and a semicircular toplight. The front porch is gabled but has a segmental arched ceiling. Porch posts are round, on a concrete base. The east wing has one story of one bay. The west wing has a slightly higher roof and a broad multipane picture window (cont'd)		36 Changes (Explain in #42) ☒ Addition ☒ Altered ☐ Moved ☐ Dnd CB		3 County St. Louis 5 Other Name(s) 14685 Clayton Road at Straub Road
43 History and Significance Through most of the nineteenth century this property was part of the much larger farm of Young Stuart. The 1878 atlas shows the house on the south side of Clayton Road, which was then called Smith Road in this part of the county. In 1891 Sylvester C. Stuart, presumably a son, sold 83.5 acres in Sections 23, 24 and 25 to Philip Kraus for \$3,801.60. Kraus and his wife Mary then sold off the ground included part of (cont'd)		37 Condition Interior Exterior fair		
44 Description of Environment and Outbuildings The overgrown landscaping in the front yard helps to insulate the house from Clayton Road, which has been widened and has a high volume of traffic. Straub Road is to the right of the house.		38 Preservation Underway? Yes ☐ No ☒		
45 Sources of Information St. Louis County Recorder of Deeds, Book 50, p. 300; 83, 393.		39 Endangered? By What? Yes ☐ No ☒		
		40 Visible from Public Road? Yes ☒ No ☐		
		41 Distance from and Frontage on Road /120		
		Photo		
		46 Prepared by E. Hamilton		
		47 Organization St. Louis County Parks		
		48 Date 8/89		
		49 Revision Date(s)		

Williem Seiler House
14685 Clayton Road at Straub Road

42. continued

with too-small shutters. Farther back to the left is another wing with shorter windows. It connects with a two-car garage, whose doors and gable face the road.


43. continued

the right-of-way of Straub Road. Seiler remained here in 1909, when the county atlas shows this house.


FO 37

SL-AS-020-026

ROADMOOR PLAT 2
PAGE 252A

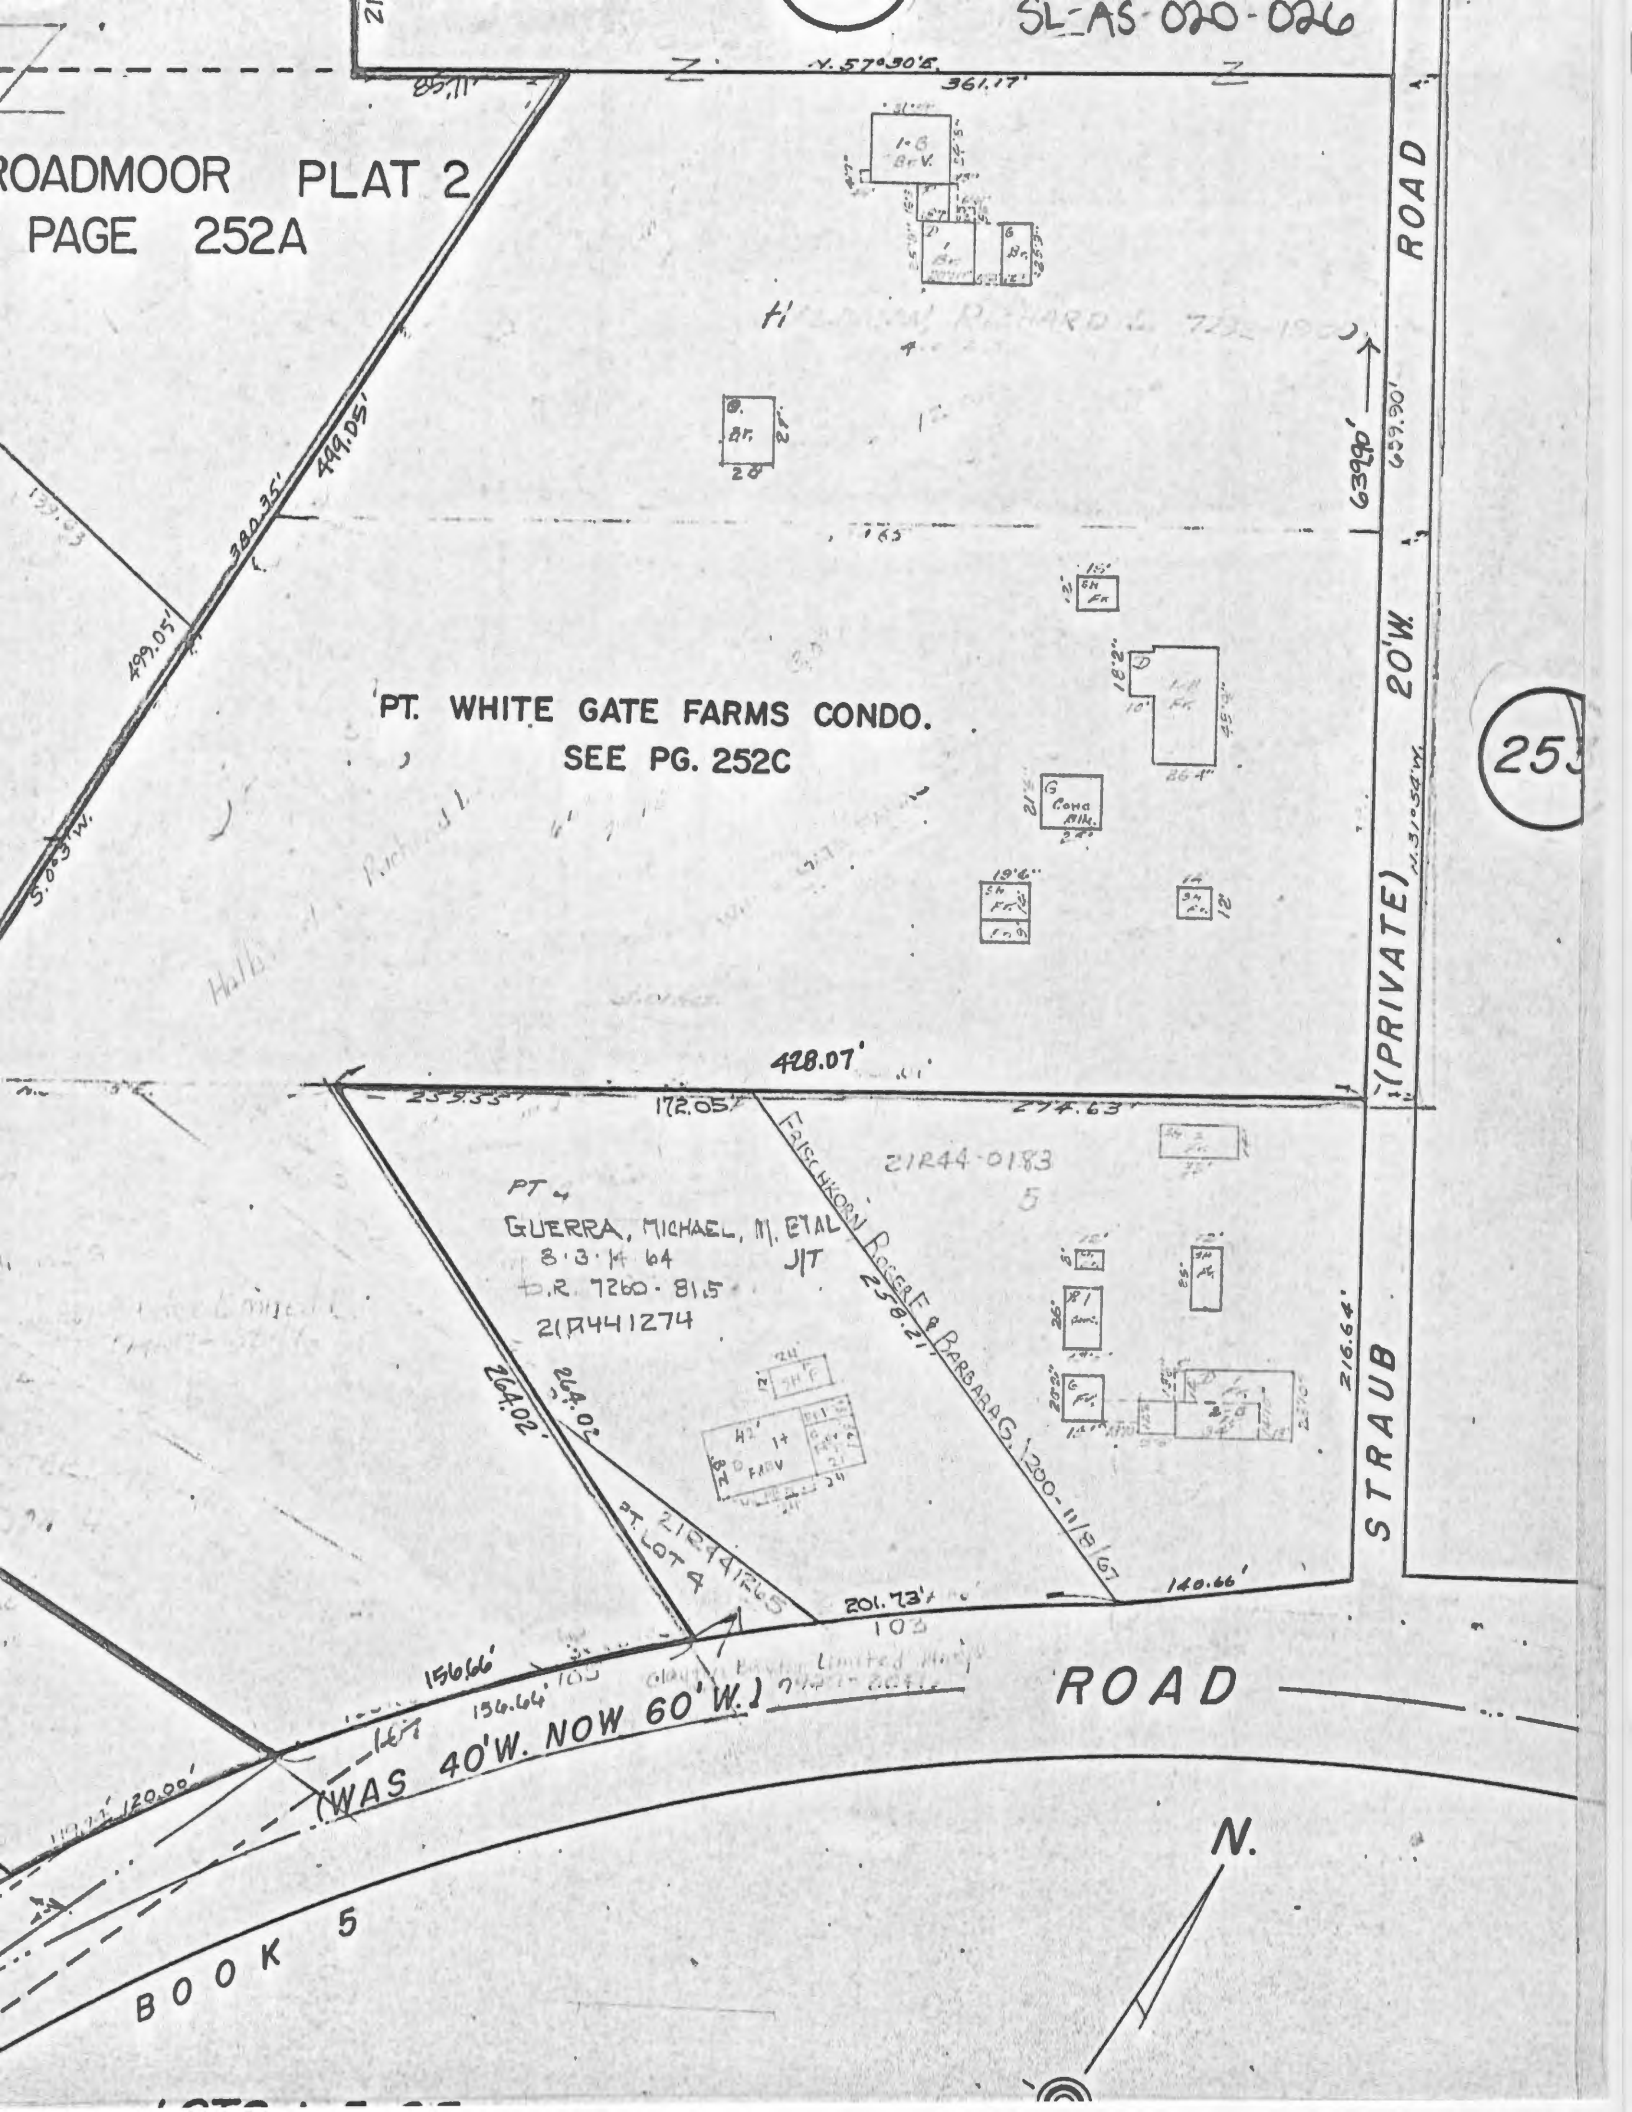

BOOK 5





HISTORIC INVENTORY

1 No. 22T440012		4 Present Name(s) Herman H. Engelke House	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives 34363-16		16026 Clayton Road	
6 Specific Location Part of Lot 8, Spring-Boylans SD		16 Thematic Category	28. No. of Stories 2
7 City or Town If Rural, Township & Vicinity Ellisville		17 Date(s) or Period constructed c. 1880	29. Basement? Yes ☐ No ☐
8 Site Plan with North Arrow		18 Style or Design vernacular 49	30. Foundation Material concrete 65
		19 Architect or Engineer	31. Wall Construction frame 66
		20 Contractor or Builder	32. Roof Type & Material gable, comp 68 68 A 63
		21. Original Use, if apparent residence 01A	33. No. of Bays Front 3+5 Side 3
		22 Present Use residence	34 Wall Treatment aluminum siding 54
		23 Ownership Public ☐ Private ☒	35. Plan Shape irregular
		24 Owner's Name & Address, if known Mary Kathleen Horan, et al	36. Changes patch Addition ☒ (Explain in #42) CB Altered ☒ Moved ☐
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒	37 Condition Interior Exterior good
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization	38. Preservation Underway? Yes ☐ No ☒
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included	39. Endangered? By What? Yes ☐ No ☒
12 Is ☐ Eligible? Yes ☐ No ☐			40. Visible from Public Road? Yes ☒ No ☐
13 Part of Estab Hist Dist? Yes ☐ No ☒			41. Distance from and Frontage on Road
14. District Potent? Yes ☐ No ☒			
15 Name of Established District			
42 Further Description of Important Features Main house has three widely spaced front bays. One-story addition on east side has one bay, while longer one-story addition on west side is large glazed porch with four wide double windows. Front porch has three bays but over door bay only. It has shed roof, slender posts and balustrade over masonry flooring. Front door has narrow sidelights and nonfitting shutters. Front windows are two-over-two and also have nonfitting shutters. On roof ridge are two small brick chimneys, not aligned with the front center bays.		Photo	
43 History and Significance The 1878 atlas shows this property as belonging to Nicholas Springer, but no house is shown. It was part of Springer and Boylan's subdivision of the Wilson Farm. The next year, it was acquired by Herman H. Engelke, and he probably built this house. He died in 1889, leaving a widow Ann and ten children. They retained this property until after 1909.			
44 Description of Environment and Outbuildings The house sits very close to busy Clayton Road and near the intersection of Valley Road.			
45 Sources of Information St. Louis County Recorder of Deeds, Book 7, page 471 St. Louis County Probate Court, #725		46. Prepared by Esley Hamilton	
		47. Organization St. Louis County Parks	
		48 Date 8/89	
		49 Revision Date(s)	

City
St. LouisPresent Name(s)
Herman H. Engelke HouseOther Name(s)
16026 Clayton Road



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

SL-AS-020-028

1 No 18R320054		4 Present Name(s) Smith-Kron House		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34082-4		14301 Conway Road		
6 Specific Location Part of U.S. Survey 369, in T45 R4		16. Thematic Category		2. County St. Louis
		17 Date(s) or Period constructed c. 1890 & 1930's		
		18. Style or Design Federal Revival 51 49		
		19. Architect or Engineer		
7 City or Town If Rural, Township & Vicinity Chesterfield		20. Contractor or Builder		4 Present Name(s) Smith-Kron House
		21. Original Use, if apparent residence OIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
8 Site Plan with North Arrow		24. Owner's Name & Address, if known John C. & Tennie B. Hoppin		63
		25. Open to Public? Yes ☐ No ☒		
		26. Local Contact Person or Organization		
		27. Other Surveys in Which Included		
9 Coordinates UTM Lat Long		28. No. of Stories 2 - 2 - 1		5 Other Name(s) 14301 Conway Road
		29. Basement? Yes ☒ No ☐		
		30. Foundation Material not evident		
		31. Wall Construction frame wood		
0 Site ☐ Building ☒ Structure ☐ Object ☐		32. Roof Type & Material gable, comp. GB GBS		63
		33. No. of Bays Front 3+ Side irr. 3		
		34. Wall Treatment 21 54 clapboard, siding		
		35. Plan Shape irregular		
1 On National Register? Yes ☐ No ☒ 12. Is It Eligible? Yes ☐ No ☐		36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐		63
		37. Condition Interior Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
3 Part of Estab Hist Dist? Yes ☐ No ☒ 14. District Potent'l? Yes ☐ No ☒		40. Visible from Public Road? Yes ☒ No ☐		63
		41. Distance from and Frontage on Road /616		
		X		
13 History and Significance Through the latter part of the 19th century this was part of the estate of George Smith. The 1878 county atlas shows a house on the south side of Conway Road, while the 1909 county atlas shows houses facing each other on both sides of the road. Presumably, then, this house was built in the 1890's initially. The Smith estate was not settled until 1920, when George R. Brown sued Martha E. Smith, Charles H. Smith, Sophie				
14 Description of Environment and Outbuildings This house sits among old trees on a site slightly lower than the road. A white-painted garage is northwest of the house.				
15 Sources of Information Dr. John C. Hoppin St. Louis County Recorder of Deeds, Book 518, pages 437 and 439; 650, 134 and 135; 1364, 164; 1180, 297; 2904, 526; 7335, 1294 St. Louis County Probate Court, 13688				
46. Prepared by Esley Hamilton				
47. Organization St. Louis County Parks				
48. Date 8/89 49. Revision Date(s)				

Smith-Kron House
14301 Conway Road

42. continued


of different proportions than the main house.

43. continued

Eatherton, and the estate of Lucy Smith. The next year, the sheriff sold the estate in two parcels to Eugene C. Mosley. In 1924 Mosley sold the property to Helen M. McLoney, the wife of George A. McLoney, a realtor. They immediately sold a tract of 18.87 acres to Minnie K. Moerschell. It is not clear if Minnie lived here, but in 1932 she sold 2.293 acres to Olivia M. Kron, the wife of Charles J. Kron, and the Krons are listed in county directories of the period. They may have modernized the front of the house. The Krons bought another acre from Moerschell in 1935. Kron, who ran the Charles J. Kron Funeral Home, died in 1939. The property was then sold to John A. and Frances K. Woodbridge, who sold it in 1952 to Charles A. Hoppin, Jr. Following his death, Mrs. Hoppin deeded it to her son and his wife, who live there now.

7240-1367

SL-AS 020-028

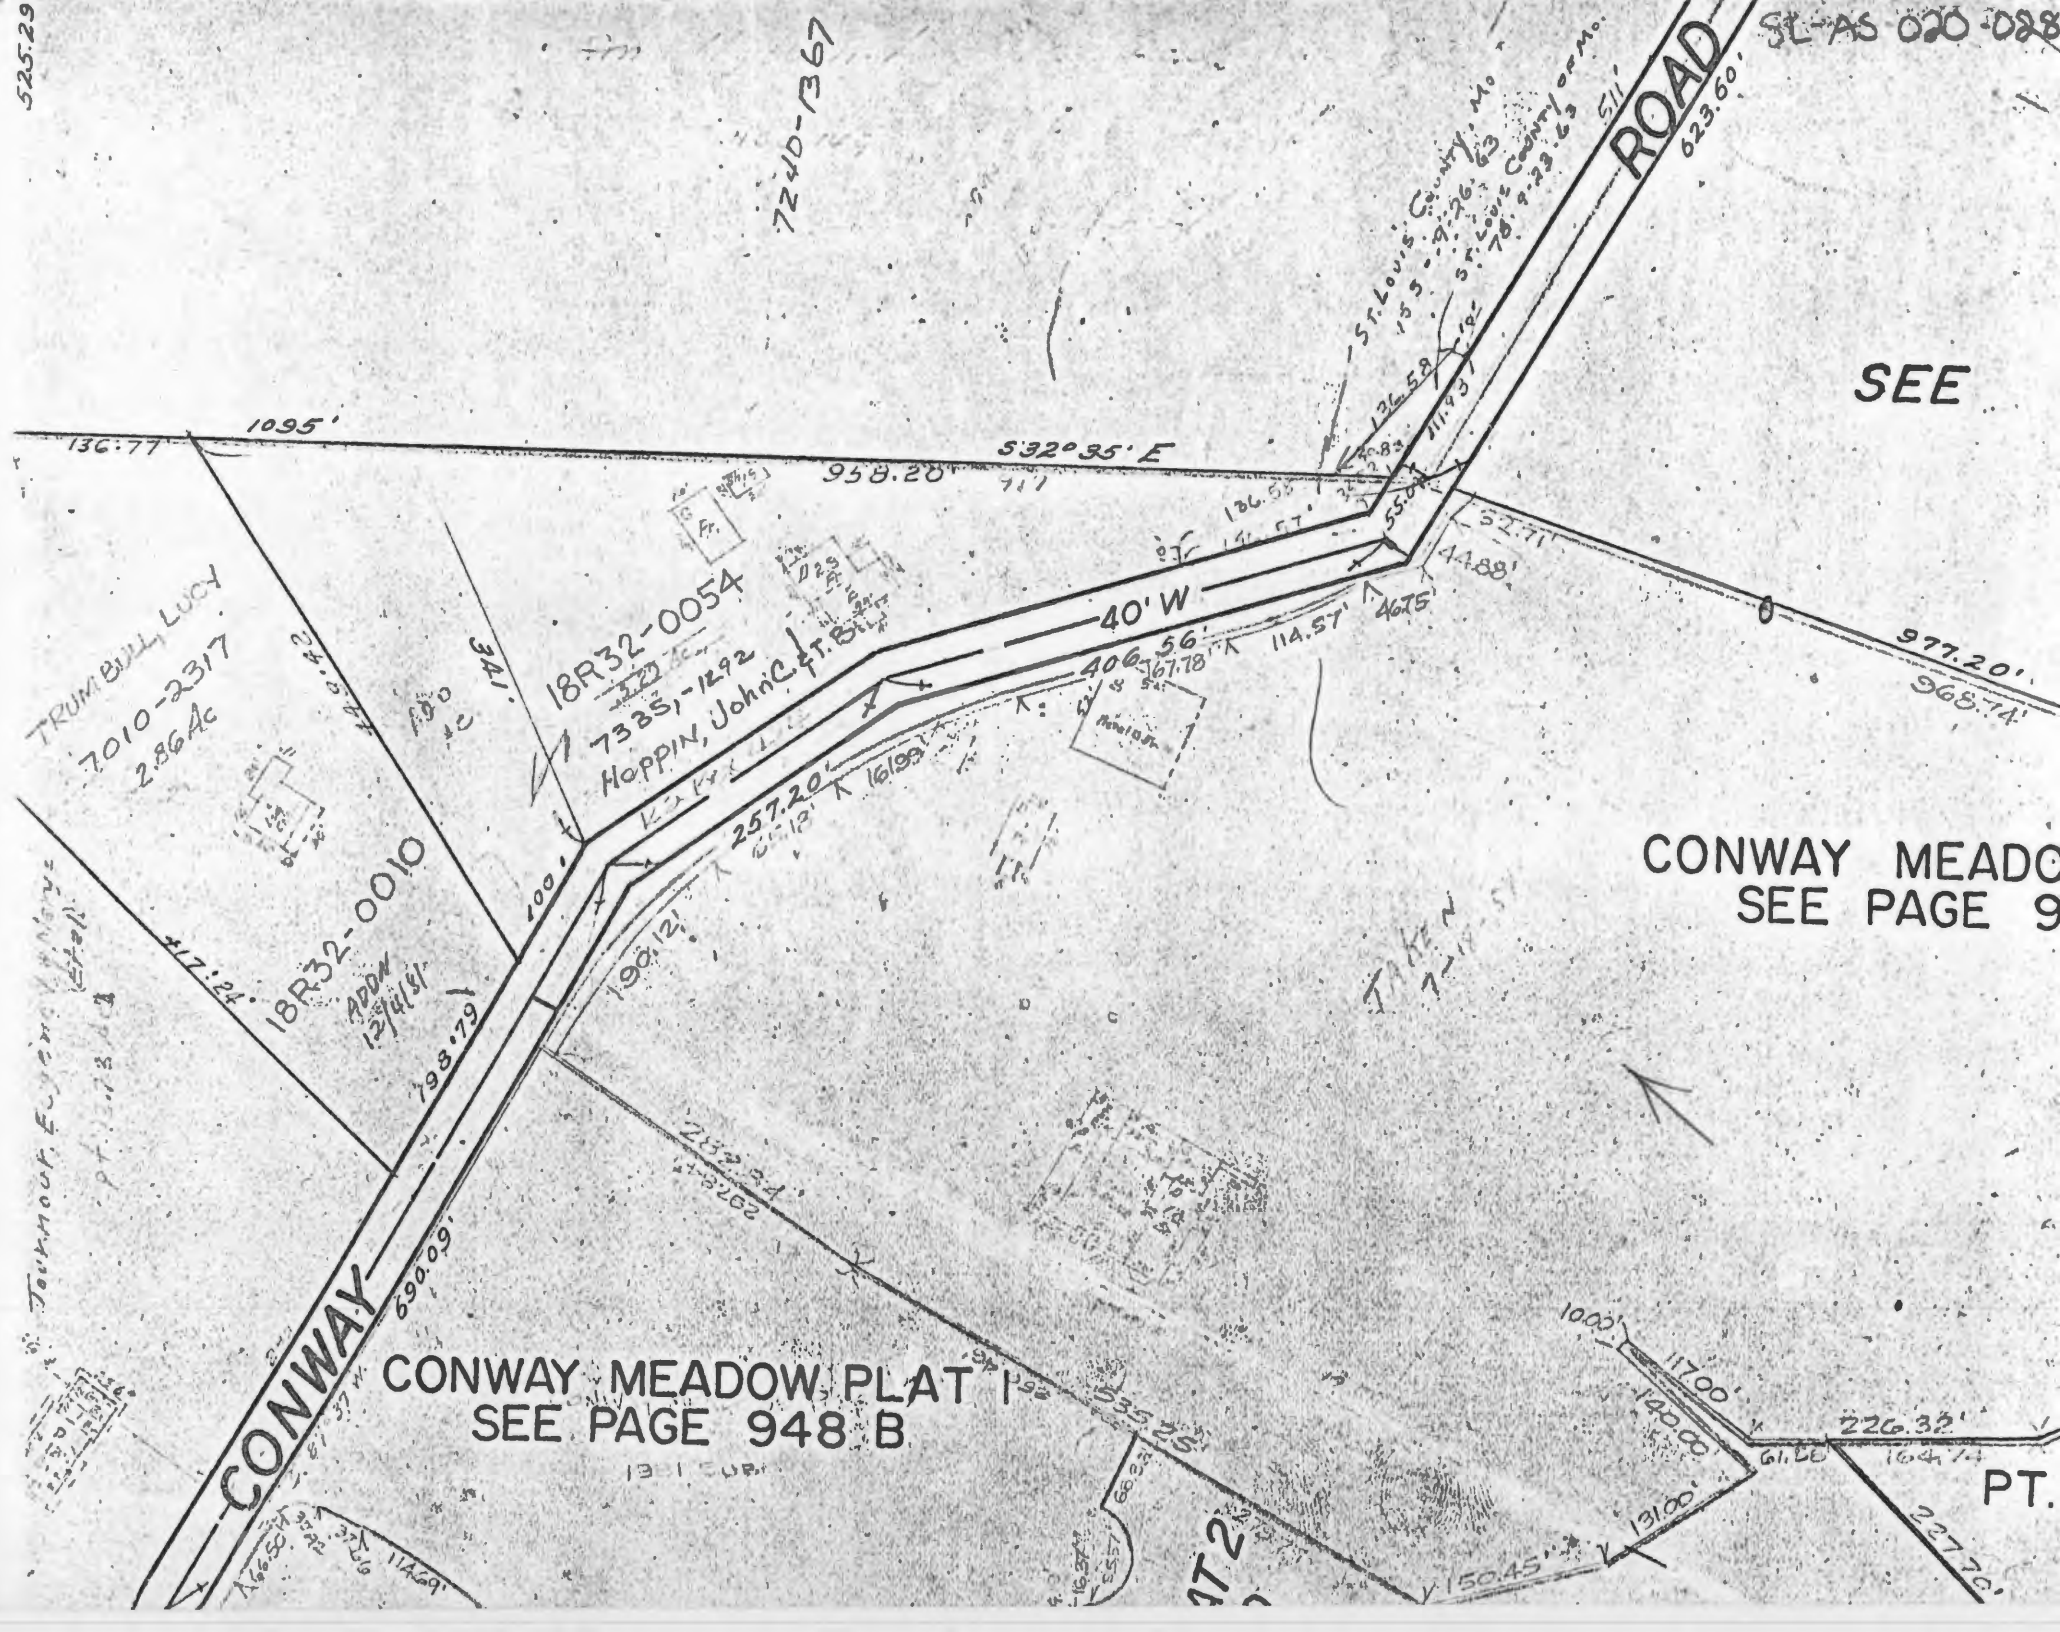

SEE

CONWAY MEADOW
SEE PAGE 9

CONWAY MEADOW PLAT
SEE PAGE 948 B



HISTORIC INVENTORY

1 No 18R220075		4 Present Name(s) Conrad Kraus House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 03302-19		Conway Day School, 14690 Conway Road		
6 Specific Location 5 acres, part of Lot 2, Samuel Conway Partition		16 Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed c. 1882 & 1960's		
7 City or Town If Rural, Township & Vicinity Chesterfield		18 Style or Design Vernacular 49		4 Present Name(s) Conrad Kraus House
8 Site Plan with North Arrow		19 Architect or Engineer		
9 Coordinates UTM Lat Long		20 Contractor or Builder		5 Other Name(s) Conway Day School 14690 Conway Road
		21 Original Use, if apparent residence OIA		
		22 Present Use vacant		
		23 Ownership Public ☐ Private ☒		
10 Site ☒ Building ☒ Structure ☐ Object ☐		24 Owner's Name & Address, if known Missouri East Annual Conference of the United Methodist Ch. 4625 Lindell, Suite 416.		
11 On National Register? Yes ☐ No ☒		25 Open to Public? St. Louis, MO 63108 Yes ☐ No ☒		6 Photo
12 Is Eligible? Yes ☐ No ☐		26 Local Contact Person or Organization		
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒		27 Other Surveys in Which Included		7 Date 7/89
14 District Potent'l? Yes ☐ No ☐				
15 Name of Established District				8 Revision Date(s)
42. Further Description of Important Features The house appears to have been built in several parts. The west end is stone, two bays, rock-faced, with squared stones arranged in broken courses. The stones used in the basement walls under the frame part are more massive. Windows vary in shape and size throughout. Older ones are two-over-two and four-over-four. The roof of the stone wing is slightly lower than the adjacent frame wing, which overhangs it. The partial second floor has "additional" dormers. One of the first-floor windows is a (continued)				
43 History and Significance This house sits on part of the original land grant of Joseph Conway, who was one of the pioneer settlers of St. Louis County. It passed to his son Samuel Conway, who died in 1870. His heirs subdivided the property and sold lots 2 and 3 to Conrad Kraus on October 29, 1890. Kraus had already bought another tract of 56 acres from Samuel Conway in 1864. That tract faced the east side of Schoettler Road and was considered (continued)				
44 Description of Environment and Outbuildings The old Conway Cemetery, about half an acre, is immediately west of the house, above and overlooking the road, which was deeply eroded in the last century. The house stands close to this steep wooded bank but has broad open fields stretching south to U.S. 40. A large frame garage east of the house has separate living quarters.				
45 Sources of Information William Bodley Lane, memo dated March 5, 1986. Interview with Mimi Kerth (Mrs. Alfred). St. Louis County Probate Court, #2914. St. Louis City Recorder of Deeds, Book 286, p. 108. continued				
46. Prepared by (continued) E. Hamilton				
47. Organization St. Louis County Parks				

Conrad Kraus House; Conway Day School
14690 Conway Road

42. continued

shallow oriel. The other one has a thick pointed lintel. The main entry is in the frame wing. The simple door is sheltered by a pedimented gable supported by four turned posts of late-Victorian style. To the right of the door is a large window with shutters. A few similar windows are on the back or south side. A large shed-roofed additional dormer above and to one side of the door has been adapted as a second-floor fire escape, with a metal deck and flight of steps. The easternmost bay of this wing is stone, with a wide brick chimney across the end. On the south side of the house, a projecting kitchen wing gives the house a T-plan. It has a one-bay shed-roofed porch on its east side, which shelters an entry into the main house. This entry is more elaborate than the front one, with sidelights. The end of the rear wing has a second metal fire escape. Inside, the stone wings and the kitchen wing have modern finishes, including the fireplace openings. The staircase to the second floor has an old balustrade.

43. continued

Kraus's homestead farm. When Kraus died in 1908, he left the homestead farm to his son John and divided the Conway Road property between sons Henry and Louis. Henry acquired this part and Louis received Lot 3, at 14730 Conway Road.

William Bodley Lane recalled that the stone wings and modern finishes were added by St. Louis architect Robert Fisher in the 1960's. He thinks that the house was probably a tenant house, possibly adapted later for Kraus's son Henry.

44. continued

The number of this property was formerly 474 Conway Road. The cemetery has .42 acre and is still owned by members of the Conway family (see City Recorder of Deeds Book 461, p. 119).

45. continued

St. Louis County Recorder of Deeds, Book 53, p. 215; 55, 4.

35 1/2 W 953.75

30' W

1051.7'

LANE

S. 4° 15' W

387.91'

SL-AS-020-029



108.08'

107.80'

6603 CONWAY

586° 20' E 1497.50'

40' W



18R22-0075
Sherwood Day School, Inc.
6603-2207 8/2/72
5,000 sq. ft.

LOT 2

6603-2207-001
18.63 Acs

603.55' W

356.20'

586° 20' E 330.39'

570.27' E


391.50'

398.30'



Site Plan

CONWAY ROAD 40' W.

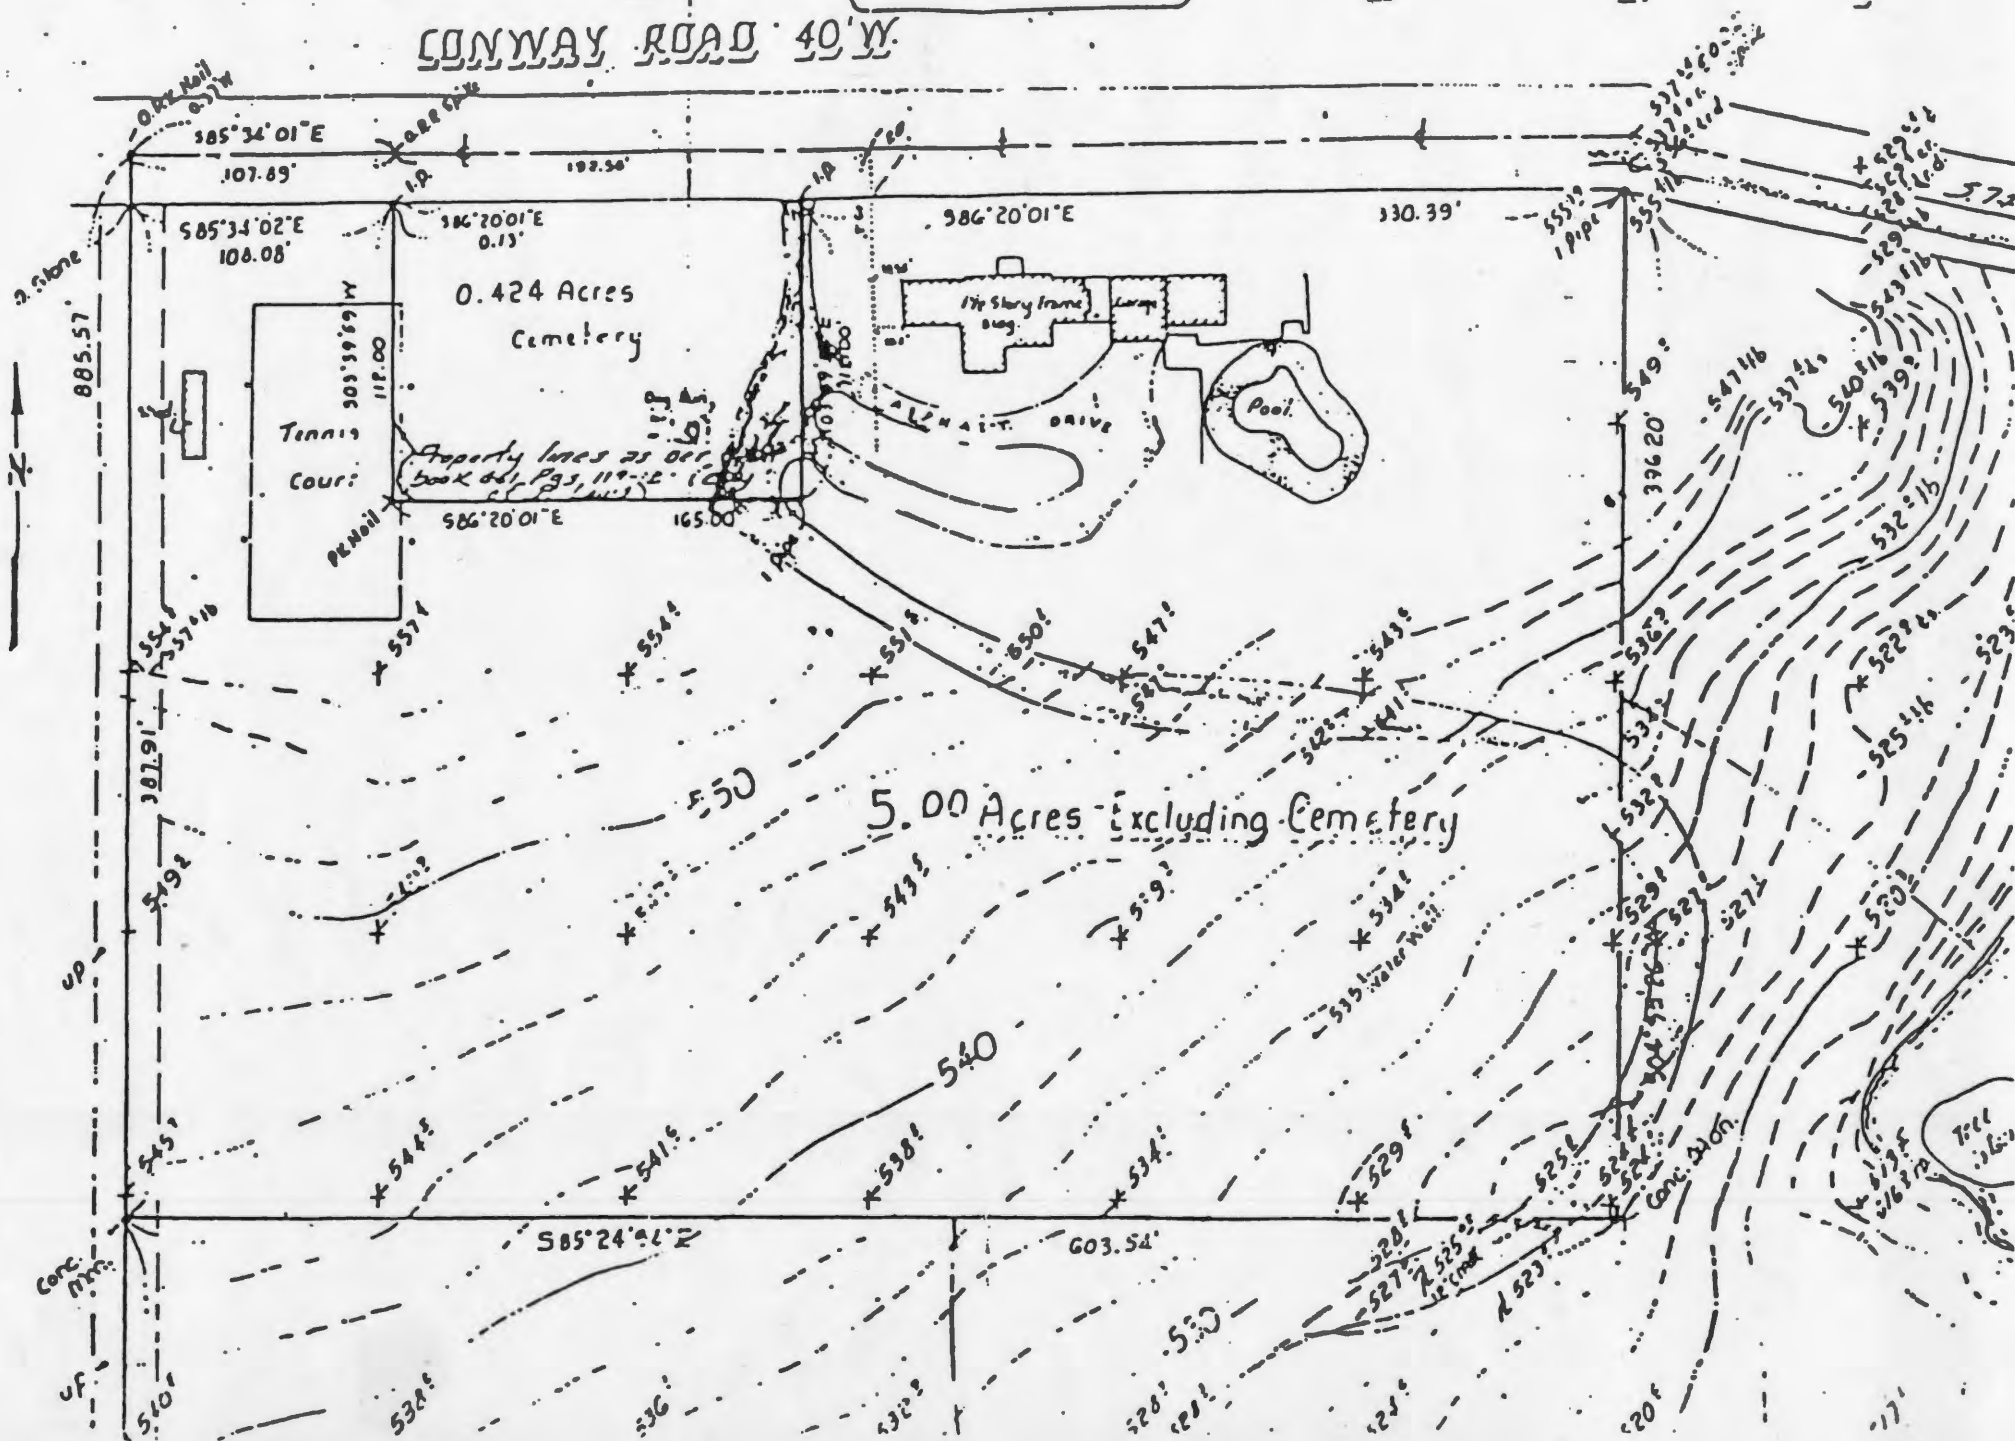

St. Louis Genealogical Society, Old Cemeteries, St. Louis County, Missouri
 Volume I (1982), p. 212

CONWAY FAMILY CEMETERY

George and Maryhelen Wilson

On grounds of Conway Day School, Conway Road west of Woods Mill (beyond Old Bonhomme Church).

SMITH, Dr. Samuel August 22, 1807 Elizabeth Gordon his wife Nov 27 1829 (this is a new stone)	CONWAY, Green B. 4/26/1829 - 1/3/1857 GILBREATH, Elizabeth w/Rev. John died 22 Mar 1855 as (24?)
CONWAY, Joseph (an old stone with a bronze Revolutionary soldier plate) Elizabeth died 30 Sept 1821 Presley b Dec 1801 died as 9m Elizabeth b July 1809 died in infancy Mary b Dec 27 1811 died in infancy	CONWAY, Samuel 7/25/1799 - 10/28/1870 Walter died 7/28/1853 as 22d Four small broken, illegible stones, presumably other Conway children Large double stone: east side Joseph, Jr. 1807 - 1888 Virginia Lanham 1816 - 1881 west side Joseph, Sr. 1762 - 1830 Elizabeth Caldwell 1773 - 1821
HODGES, Rev. Coleman Member of the Presbytery of St. Louis and pastor of Bonhomme Presbyterian Church. Died July (1838?) in the 26th year of his age.	CONWAY, Arthur May 5/27/1861 - 1/27/1923 Lizzie Wiles 2/12/1860 - 4/23/1930 Helen May 5/8/1892 - 9/23/1956 CUTTER, inf s/Arthur & Ruth 1918
CONWAY, Mary E. w/Samuel Mother 8/27/1813 - 12/29/1863	
RUBY, Pink Conway 10/29/1834 - 12/3/1859	

++

++

++

HIBLER-FITZGERALD CEMETERY Lois Stanley and Maryhelen Wilson

West side of Mason Road, south of Olive Street Road. Many broken stones and unmarked graves.

HIBLER, In memory of Susanna In memory of William who departed this life Feb 15 1845 as 58y and 5d William Green s/? and Susanna born (1818?) died 3/12/1868	HIBLER, William D. 3/19/1819 - 11/17/1883 Ocy A. 5/20/1825 - 3/8/1856 Huldah died 10/5/1873 as 18y 8m 10d M. M. d/William & O. A. died 1874 as 30y 4m 26d
FITZGERALD, James W. and Elizabeth his wife James 12/6/1812 - 10/22/1883 Elizabeth 3/4/1817-6/20/1867 Josephine d/James & Elizabeth died 7/6/1867 as 25y 5m 1d Jasper s/James & Elizabeth died 6/8/1872 as 23y 5m 14d	SMITH, Andrae FISHER, Lucy A. died July - 1847 as 7y 2d FITZGERALD, Alice 11/28/1859 - 6/14/1900 Lucy 7/1/1845 - 12/4/1921 Marshall 5/27/1851 - 12/6/1902 _____, wife of W. J. B. 5/29/1825 - 3/18/1866
Also: _____, child of William and Maggie born 1872 died 1875	

++

++

++



CONWAY
DAY
SCHOOL

HISTORIC INVENTORY

1 No 19R530012		4 Present Name(s) Louis C. Kraus House		1 No 2 County St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34082-8		14730 Conway Road		
6 Specific Location 16.14 acres of Lot 3 Conway Subdivision		16. Thematic Category 010		2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1920		
8 Site Plan with North Arrow		18. Style or Design Vernacular 22		
		19. Architect or Engineer		4 Present Name(s) Louis C. Kraus House
		20. Contractor or Builder		
		21. Original Use, if apparent farm DIA		
		22 Present Use residence		5 Other Name(s) 14730 Conway Road
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Louis C. Kraus		
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		Photo
10 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		
11. On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		
12. Is Eligible? Yes ☐ No ☐				
13 Part of Estab Hist Dist.? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☐		
15 Name of Established District				
42 Further Description of Important Features The front door is slightly right of center. It and adjacent paired windows are sheltered by a gabled front porch in the brick posts, bracketed cornice, and square balusters. Windows are three-over-one. Large dormer in center of front has similar brackets, two windows. Chimneys are inside both ends. Frame back porch forms additional bay at rear.				
43 History and Significance This lot is part of the original land grant of Joseph Conway, one of the pioneer settlers of St. Louis County. It passed to his son Samuel, who died in 1870, and then to Samuel's heirs, who divided it into lots and sold lots 2 and 3 to Conrad Kraus in 1890. Kraus had already bought land on Schoettler Road from Samuel Conway in 1864, and he considered that his homestead. When he died in 1908, he left lot 2 (14690 Conway Road) to his son Henry, and this lot to his son Louis. The present owner is a grandson. The				
44 Description of Environment and Outbuildings House has complete farm complex around it, including white-painted barn, granary, smokehouse, and other sheds. One shed is sided in tarpaper. To the south the ground slopes down toward U.S. 40. (5)				
45 Sources of Information St. Louis County Probate Court, #2914. St. Louis County Recorder of Deeds, Book 55, p. 4.				
46. Prepared by E. Hamilton				
47. Organization St. Louis County Parks				
48. Date 7/89 49 Revision Date(s)				

Louis C. Kraus House
14730 Conway Road

43. continued

present house was constructed in 1920 after the previous house burned down.

ROAD

SL-A5-020-030

LANE

S. 40° 15' W.

BAYLE


920

KRAUS LOUIS & ANITA

32.50 ACRES
+ 7.20 ACRES
16.145 ACRES

19R53-0012

LOT 3



032

WIDLEY B.
S. 1.99 AC

25'

NCE OF 7TH
VISTIS

609

3

4.210 AC

370.50'
15.972'

N 25° 15' E
24 CH.

957'
422'

181.85'

169.69'

520'

101.12'

98.58'



HISTORIC INVENTORY

3L-AS-070-031

1 No 18R110086		4 Present Name(s) Old Bellefontaine School		1 No	
2 County St. Louis		5 Other Name(s)		2 County St. Louis	
3 Location of Negatives 34329-32		14950 Conway Road		4 Present Name(s) Old Bellefontaine School	
6 Specific Location 1 acre in Survey 370, T45 R4		16. Thematic Category		28. No. of Stories 1 - 1	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period original date not known		29. Basement? Yes ☐ No ☐	
8 Site Plan with North Arrow		18. Style or Design now modified Ranch 49		30. Foundation Material	
		19. Architect or Engineer		31. Wall Construction frame WH WD	
		20. Contractor or Builder		32. Roof Type & Material gable, comp. GB GB 13	
		21. Original Use, if apparent school D5A		33. No. of Bays Front 5 Side irr.	
		22 Present Use residence		34. Wall Treatment 30 stretcher bond veneer	
		23 Ownership Public ☐ Private ☒		35. Plan Shape irregular	
		24. Owner's Name & Address, if known Norman J. Sutter c/o Commerce Bank, Sutter 204833 P.O. Box 11356, St. Louis 63105		36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐ R1	
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior	
0 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☐	
1. On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☐	
12. Is It Eligible? Yes ☐ No ☐				40. Visible from Public Road? Yes ☐ No ☐	
3 Part of Estab Hist Dist? Yes ☐ No ☒				41. Distance from and Frontage on Road /264	
5 Name of Established District				5 Other Name(s) 14950 Conway Road	
12 Further Description of Important Features		The school is now almost unrecognizable as a wing of a modern house. The wing has brick veneer, eight-over-eight windows with shutters, and clapboarded gable ends with louvered vents. The main wing of the house has a verandah with a concrete base, four posts with capital moldings and matching antae. The front door has flanking carriage lights. A large chimney rises in the center of the roof.		Photo	
13 History and Significance		This site was given to the school trustees by Samuel Conway, son of pioneer Joseph Conway. The date of construction of the surviving school is not known. The district was originally called District 4, Township 45 Range 4. In 1910 it was designated District No. 27, Bellefontaine. The district became part of the newly formed Parkway district in 1954. The building was originally one room and later was expanded by a second room, making a T-shaped building. The whole thing was incorporated into a			
14 Description of Environment and Outbuildings		This house is very close to the road, and the old wing is almost completely hidden by vines and shrubs. The large lot is thickly wooded behind the house.			
15 Sources of Information		Edmund Louis Detering, Development of School Districts in St. Louis County (Ph.D. dissertation, Washington University, 1958) Parkway School District History Notebook (1979).		46. Prepared by Esley Hamilton	
				47. Organization St. Louis County Parks	
				48. Date 9/89	
				49. Revision Date(s)	

Old Bellefontaine School
14950 Conway Road

43. continued

new house after the new school district sold the property, presumably in the 1960's.

SL-AS-070-031

ROAD

18R11-0064
LEWIS, BECKY ETAL T/C
8243-0756
3.179 ACS.

18R11-0053
SUTTON, NORMAN J. 804-1687
264.0'

18R11-0020
ALTSHULER, L & J, T.K.
7725-998

18R11-0031
DELMAR GARDENS ENTERPRISES INC.
2.01 ACS.

DR 7061-1438

RES. DATE 1900. 4.73 ACRES

361.57' 317.0' 7845-2202

153.70' 1151.00 365.43' 400.0'

494.51' 491.31' 5.58°36'W

2853 138

10' 40' N71°28'W 234.58' 85.49' 135.16' 165'

108.86' 132.22' N58°35'W 125.31'

110.89' N58°45'W

1.00 AC. POOL 7 V

26' 6' 21' 11' 11'

3553 ADS.

110-1-1-65 SPANISH, BARRY ETAL 110-4-28-54 386.0' N66°43'W

472.26' N22°39'E

525.0'

1500'

DRAWN ON PAGE 917

[illegible][illegible][illegible][illegible]

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 2'

11' 8"

11'

12' 11"

3553 ADS.

18R11-0053

8238-1957

190-1-1-65

Sponsenian, BARRY ETAL

110-4-28-54

386.0'

N66°43'W

472.26'

N22°39'E

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

DELMAR GARDENS ENTERPRISES INC.

2.01 ACS.

7845-2202

361.57'

317.0'

18RT1-0020

ALTSHULER, L & J, TR.

7725-998

7500'

RES. DATE 1900.

4.73 ACRES

DRAWN ON PAGE 917

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 2'

11' 8"

11'

12' 11"

3553 ADS.

18R11-0053

8238-1957

190-1-1-65

Sponsenian, BARRY ETAL

110-4-28-54

386.0'

N66°43'W

472.26'

N22°39'E

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

DELMAR GARDENS ENTERPRISES INC.

2.01 ACS.

7845-2202

361.57'

317.0'

18RT1-0020

ALTSHULER, L & J, TR.

7725-998

7500'

RES. DATE 1900.

4.73 ACRES

DRAWN ON PAGE 917

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 2'

11' 8" 1'

11'

12' 11" 4"

3553 ADS.

18R11-0053

8238-1957

190-1-1-65 Sponsenian, BARRY ETAL

110-4-28-54

386.0'

N66°43'W

472.26'

N22°39'E

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

7845-2202

361.57'

317.0'

DELMAR GARDENS ENTERPRISES INC.

2.01 ACS.

18RT1-0020

ALTSHULER, L & J, TR.

7725-998

7500'

RES. DATE 1900.

4.73 ACRES

DRAWN ON PAGE 917

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 21'

11' 8" 11'

12' 11" 11'

3.553 ACS.

18R11-0053

8238-1957

190-1-1-65 SPENSATION, BARRY ETAL

110-4-28-54

386.0'

N66°43'W.

472.26'

N22°39'E.

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

7845-2202

361.57'

317.0'

DELMAR GARDENS ENTERPRISES INC.

2.01 AC.

ALTSHULER, L & J, TR.

7725-998

18RT1-0020

RES. DATE 1900.

4.73 ACRES

750'00'

DRAWN ON PAGE 917

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 21'

11' 8" 11'

12' 11" 11'

3.553 ACS.

18R11-0053

8238-1957

190-1-1-65 SPENSATION, BARRY ETAL

110-4-28-54

386.0'

N66°43'W.

472.26'

N22°39'E.

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

7845-2202

361.57'

317.0'

DELMAR GARDENS ENTERPRISES INC.

2.01 AC.

ALTSHULER, L & J, TR.

7725-998

18RT1-0020

RES. DATE 1900.

4.73 ACRES

750'00'

DRAWN ON PAGE 917

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 21'

11' 8" 11'

12' 11" 11'

3.553 ACS.

18R11-0053

8238-1957

190-1-1-65 SPENSATION, BARRY ETAL

110-4-28-54

386.0'

N66°43'W.

472.26'

N22°39'E.

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

7845-2202

361.57'

317.0'

DELMAR GARDENS ENTERPRISES INC.

2.01 AC.

ALTSHULER, L & J, TR.

7725-998

18RT1-0020

RES. DATE 1900.

4.73 ACRES

750'00'

DRAWN ON PAGE 917

SL-AS-070-031

ROAD

10' 40'

N71°28'W 234.58'

85.49'

135.16'

165'

18R11-0064

108.86'

132.22' N58°35'W 125.31'

158°45'W 110.89'

1.00 AC. POOL 7V

SUTTER, NORMAN J. 804-1467

264.0'

26' 6" 21'

11' 8" 11'

12' 11" 11'

3.553 ACS.

18R11-0053

8238-1957

190-1-1-65 SPENSATION, BARRY ETAL

110-4-28-54

386.0'

N66°43'W.

472.26'

N22°39'E.

525.0'

400.0'

365.43'

1151'00

153.70'

5.58°36'W

491.31'

2853 13B

DR 7061-1438

18R11-0064

LEWIS, BECKY ETAL T/C

8243-0756

3.179 ACS.

12

18R11-0031

7845-2202

361.57'

317.0'

DELMAR GARDENS ENTERPRISES INC.

2.01 AC.

ALTSHULER, L & J, TR.

7725-998

18RT1-0020

RES. DATE 1900.

4.73 ACRES

750'00'

DRAWN ON PAGE 917



HISTORIC INVENTORY

SL-AS-020-032

1 No 18R110097		4 Present Name(s) "White Oaks," William T. Deacon House		1 No
2 County St. Louis		5 Other Name(s) 15020 Conway Road		
3 Location of Negatives 1977-12				
5 Specific Location 3.46 acres in Survey 1911 Township 45 Range 4		16 Thematic Category 030		2 County St. Louis 50 4 Present Name(s) "White Oaks," William T. Deacon House 5 Other Name(s) 15020 Conway Road
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1941		
8 Site Plan with North Arrow		18 Style or Design Greek Revival 52 49		
		19 Architect or Engineer		
		20 Contractor or Builder		
		21 Original Use, if apparent residence 01A		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Becky Lewis, et al 1856 Winter Run Court, 63017		
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒		
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization		
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		
12 Is It Eligible? Yes ☐ No ☐				
13 Part of Estab Hist Dist? Yes ☐ No ☒				
14 District Potent'l? Yes ☐ No ☒				
15 Name of Established District				
42 Further Description of Important Features		Striking design has four-column Ionic portico at center, five-column Doric loggias on either side. Columns are fluted. Friezes are plain. Loggias are surmounted by balustrade with vase-shaped balusters linking blocky piers over each column. Main pediment has half-circle window. A square cupola stands at roof ridge. A white-painted chimney rises from north side of main part. At north end is a bay window with coffered moldings above six-over-six windows. At south end is latticework-covered lean-to		Photo
43 History and Significance		This lot was part of the large estate of Gottlieb Albrecht of about 160 acres. Albrecht's house on Olive Boulevard, part of the same tract, has been moved to Faust Park. Albrecht died in 1938, and his heirs sold this tract of 3.458 acres the following year to William T. and Virginia Deacon. At the time Deacon was the president of the Petroleum Equipment Company and lived at 28 Ridgetop in Richmond Heights. The Deacons		
44 Description of Environment and Outbuildings		The same owner also owns the adjacent lots with locator numbers 18R11075 and 18R110064. To the west is the small cottage at 15050 Conway Road, part of the same property. Property is almost completely wooded but drive in front of house is landscaped with hedges and flower beds.		
45 Sources of Information		46 Prepared by E. Hamilton		47 Organization St. Louis County Parks
St. Louis County Probate Court, #13309, 29811. St. Louis County Recorder of Deeds, Book 1569, page 599 County Directories		48 Date 8/89		
		49 Revision Date(s)		

"White Oaks," William T. Deacon House
15020 Conway Road

42. continued

addition. House faces west, at right angles to road.

43. continued


moved to this location by 1943, and by the end of the war Deacon had become a manufacturer's agent for the Solvents and Plastics Company with offices in Clayton. He died November 29, 1959. The property was later owned by Howard F. Baer, the prominent St. Louis businessman who wrote St. Louis To Me and who has been active in nearly all aspects of the city's cultural life. He moved here from 45 Portland Place, a striking modern house designed by Frederick Dunn. Mrs. Baer is a daughter of Louis Aloe, for whom the plaza in front of Union Station was named.



(932

(913

PART OF
SURVEY 1911





1 No 18R110097	4 Present Name(s) Deacon Caretaker's House		1 No
2 County St. Louis	5 Other Name(s)		
3 Location of Negatives 34082-12	15050 Conway Road		

Specific Location Part of 3.46 acres in Survey 1191, Township 45 Range 4	16. Thematic Category	28. No. of Stories 1½	2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield	17 Date(s) or Period constructed c. 1941	29. Basement? Yes ☐ No ☒	
8 Site Plan with North Arrow	18. Style or Design vernacular 18	30. Foundation Material concrete 65	
	19. Architect or Engineer	31. Wall Construction frame wll	
	20. Contractor or Builder	32. Roof Type & Material gable, comp GB FT 63	
	21. Original Use, if apparent residence DIA OIC	33. No. of Bays Front 2 Side irr 2	
	22 Present Use residence	34. Wall Treatment shiplap siding 21	
	23 Ownership Public ☐ Private ☒	35. Plan Shape rectangular	
	24. Owner's Name & Address, if known Lewis, Becky, et al 1856 Winter Run Court 63017	36. Changes (Explain in #42) prch Addition: ☒ Moved: ☐	
	25. Open to Public? Yes ☐ No ☒	37. Condition Interior _____ Exterior good	

9 Coordinates UTM Lat _____ Long _____	26. Local Contact Person or Organization	38. Preservation Underway? Yes ☐ No ☒	4 Present Name(s) Deacon Caretaker's House
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐	27. Other Surveys in Which Included	39. Endangered? By What? Yes ☐ No ☒	
11. On National Register? Yes ☐ No ☒		40. Visible from Public Road? Yes ☒ No ☐	

12. Is It Eligible? Yes ☐ No ☐	13. Part of Estab Hist Dist? Yes ☐ No ☒	41. Distance from and Frontage on Road /789'	5 Other Name(s) 15050 Conway Road
14. District Potent'l? Yes ☐ No ☒	15 Name of Established District	Photo	
42 Further Description of Important Features The main feature of the house is a screened porch across east front. It has four Tuscan columns but no frieze or cornice and an almost flat roof. A second porch roof is on the north side, supported by thin metal posts. Above this double doors open into the gable end of the house. Windows are one-over-one.			

43 History and Significance This small house appears to have been the caretaker's house for 15020 Conway Road, and it is still part of the same tract of real estate. It is also linked stylistically by the columns of the front porch. The estate was developed about 1941 by William T. Deacon and was later the home of prominent St. Louis businessman Howard F. Baer.

44 Description of Environment and Outbuildings The house is at right angles to the road facing east toward a broad lawn and the main drive to 15020 Conway Road.

45 Sources of Information St. Louis County Recorder of Deeds, Book 1569, page 599	46. Prepared by E. Hamilton
	47. Organization St. Louis County Parks
	48. Date 8/89
	49 Revision Date(s)



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

SL-AS-020-034

1 No 18S340356		4 Present Name(s) Henry Yokel House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 1977-11		15125 Conway Road		
6 Specific Location 2.34 acres in Survey 1911, T45 R4		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed 1850's & 1870		
		18. Style or Design Federal/vernacular 09		
		19. Architect or Engineer		
7 City or Town If Rural, Township & Vicinity Chesterfield		20. Contractor or Builder		4 Present Name(s) Henry Yokel House
		21. Original Use, if apparent residence 01A		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
8 Site Plan with North Arrow		24. Owner's Name & Address, if known Duncan S & Lynne N. Johnson		5 Other Name(s) 15125 Conway Road
		25. Open to Public? Yes ☐ No ☒		
		26. Local Contact Person or Organization		
		27. Other Surveys in Which Included St. Louis County Inventory, 1965		
9 Coordinates UTM Lat Long		28. No. of Stories 2		63
0 Site ☐ Building ☒ Structure ☐ Object ☐		29. Basement? Yes ☒ No ☐		
11 On National Register? Yes ☐ No ☒		30. Foundation Material stone 40		
12. Is It Eligible? Yes ☐ No ☐		31. Wall Construction frame 6W		
3 Part of Estab Hist Dist? Yes ☐ No ☒		32. Roof Type & Material gable, comp. GB SD		63
14. District Potent'l? Yes ☐ No ☒		33. No. of Bays Front 5 Side 2		
15 Name of Established District		34. Wall Treatment aluminum siding 5A		
		35. Plan Shape irregular		
13 History and Significance According to the present owners, this house has its origins in the 1850's but was modified to its present form about 1870. In 1857 Henry Yokel acquired 66 acres stretching from Conway to Olive from Fred Estes. Yokel acquired several other tracts over the years, but this was his homestead. He lived here until his death in 1905, when he bequeathed it to his wife Sarah and then to his surviving son Henry G. Yokel. Sarah died in 1918. Henry G. outlived two of his five sisters, dying in 1947. In 1951 the surviving		36. Changes (Explain in #42) PO Addition ☒ Altered ☒ Moved ☐		63
		37. Condition Interior Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
14 Description of Environment and Outbuildings A small red barn is located in the back yard.		40. Visible from Public Road? Yes ☒ No ☐		63
		41. Distance from and Frontage on Road /295'		
		Photo		
15 Sources of Information St. Louis County Probate Court, #2477, #5012, #19390. St. Louis County Recorder of Deeds, Book 3851, p. 246; 6158, 592; 6607, 671. St. Louis City Recorder of Deeds, Book 133, page 341		46. Prepared by Esley Hamilton		63
		47. Organization St. Louis County Parks		
		48. Date 8/89		


Henry Yokel House
15125 Conway Road

43. continued

sister Annie B. Yokel formed a trust in memory of her family, giving it her real estate. This tract has been sold several times since then.

~~Q. 2.2.5.~~

POOS-ESLINGER
7/16/63
PT. 11-64A

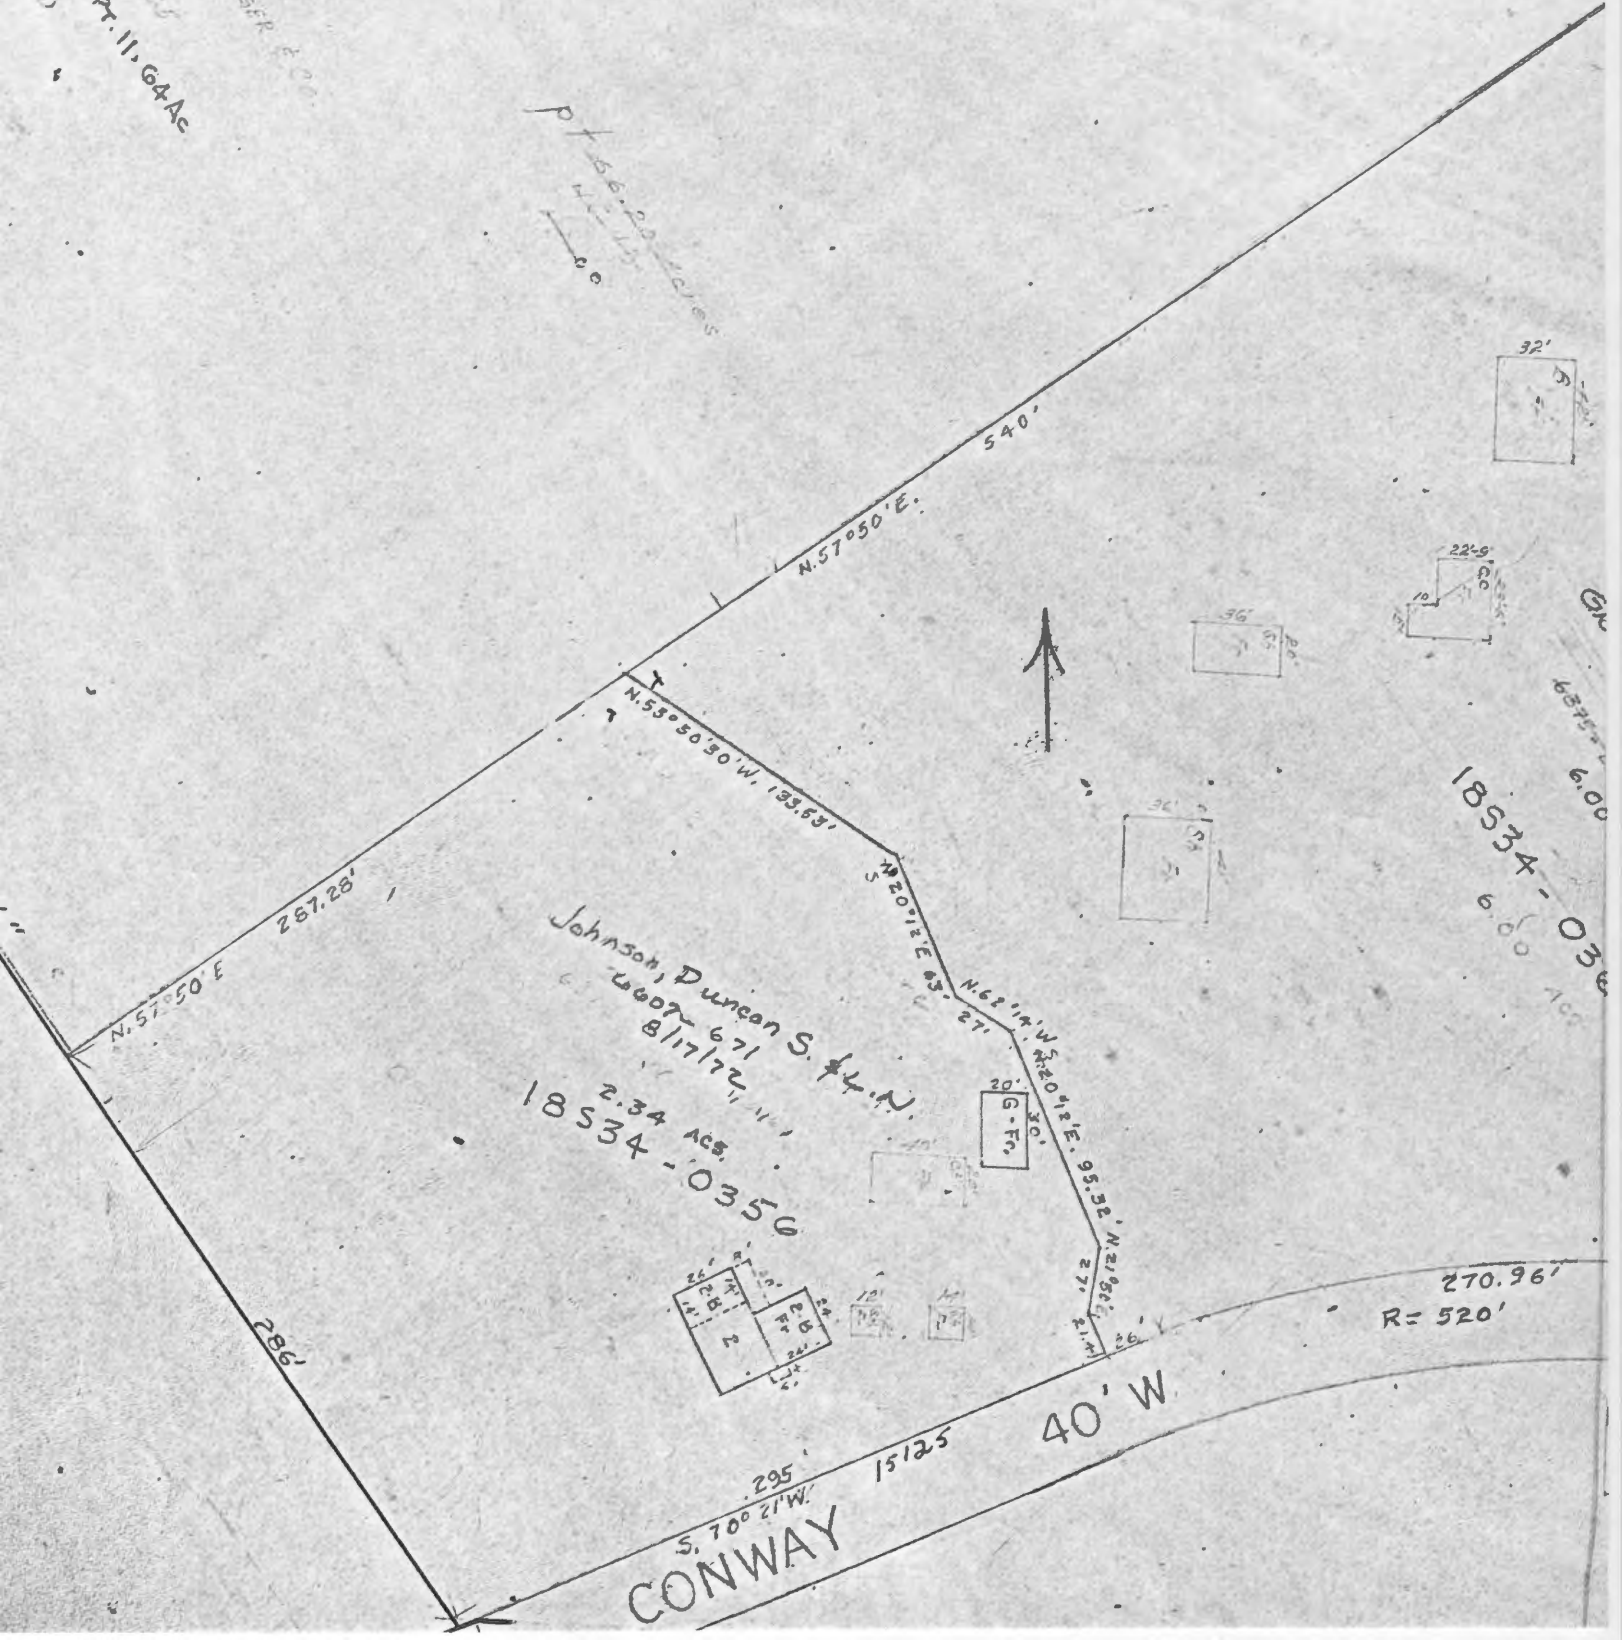



HISTORIC INVENTORY

SL-AS-020-035

1 No 18S330027		4 Present Name(s) A. L. Yokel House		1 No 2 County St. Louis 3 Location of Negatives 34082-20
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34082-20		15201 Conway Road		
6 Specific Location 1.06 acres in Survey 415, August Hills Estate Subd, Survey 1911, T45 R4.		16 Thematic Category		28. No. of Stories 2 29. Basement? Yes ☒ No ☐ 30. Foundation Material stone 31. Wall Construction frame 32. Roof Type & Material 16 cross gable, comp. 33. No. of Bays Front 3 Side 5 34. Wall Treatment asbestos shingle 64 35. Plan Shape L-shaped 36. Changes <i>Prd</i> Addition <i>W</i> (Explain in #42) <i>CBG</i> Moved <i>1</i> 37. Condition Interior Exterior fair 38. Preservation Underway? Yes ☐ No ☒ 39. Endangered? Yes ☒ No ☐ By What? redevelopment 40. Visible from Public Road? Yes ☒ No ☐ 41. Distance from and Frontage on Road 205
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period		
8 Site Plan with North Arrow		18. Style or Design vernacular 49		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence <i>OIA</i>		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Delmar Gardens Enterprises 15455 Conway Rd., Suite 300		
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☐		
0 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		
12. Is It Eligible? Yes ☐ No ☐				
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		
5 Name of Established District				
12 Further Description of Important Features Siding detracts somewhat from the appearance of this house. Windows are two-over-two and three-over-one, with non-fitting shutters. The front door has a transom light. It is sheltered by a porch with turned posts and returns, gingerbread brackets, a square-framed porch railing and similar balcony railing on the flat roof. The rear wing has an east-facing two-story verandah with similar railing upstairs but no railing on the ground floor.				5 Other Name(s) A. L. Yokel House 15201 Conway Road
13 History and Significance In the 19th century this lot was part of the 69-acre farm of August Hill, which stretched along the east side of Schoettler Road from Conway to Olive. Hill's house was near the north end of the track. He died in 1890 and his widow Maria died in 1895, leaving four sons, two daughters, and three grandchildren by a deceased son. One of the daughters was Augusta L., who married George Yokel. The Yokel family lived right next (continued)				
14 Description of Environment and Outbuildings A barn is located northeast of the house. The grounds are screened from the road by a thicket of trees and shrubs.				
15 Sources of Information St. Louis County Recorder of Deeds, Book 71, p. 229; 98, 420. St. Louis City Recorder of Deeds, Book 151, p. 110. St. Louis County Probate Court, #783, 821, 1226.				46. Prepared by Esley Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)

A. L. Yoke1 House
15201 Conway Road

43. continued

door at 15125 Conway Road, but George was not one of those children; perhaps he was a cousin. Augusta inherited this part of the property in the partition of the family estate that took place in 1893. The style of this house is close to that of the Yoke1 House at 15125 Conway, which is usually dated much earlier, but this house does not appear in the 1878 county atlas. It was therefore probably built by Augusta or shortly before her acquisition of it.

SL-AS-020-025

DR.

299.01'

CONWAY

133.14'

GAR H

GAR H

BLDG H

BLDG H

BLDG G

GAR F

GAR G

GAR F

GAR E

GAR E

BLDG F

BLDG E

BROWN N.O. DEV CO.
6511-474 4-19-71

4.69 AC.

18533-0027
DELMAR GARDENS ENTERPRISES INC
7430-148

30' 20' 14'

184.0'

205.0'



225.0'

CONWAY

203.40'

5.85°39'E

187.41'

396.21'

ST. LOUIS COUNTY
407.50 SQ. FT
8418-1470

ST. LOUIS CO.


0.05 ACS. 8418-1470

358.32'

100.86'

142.38'

30' W

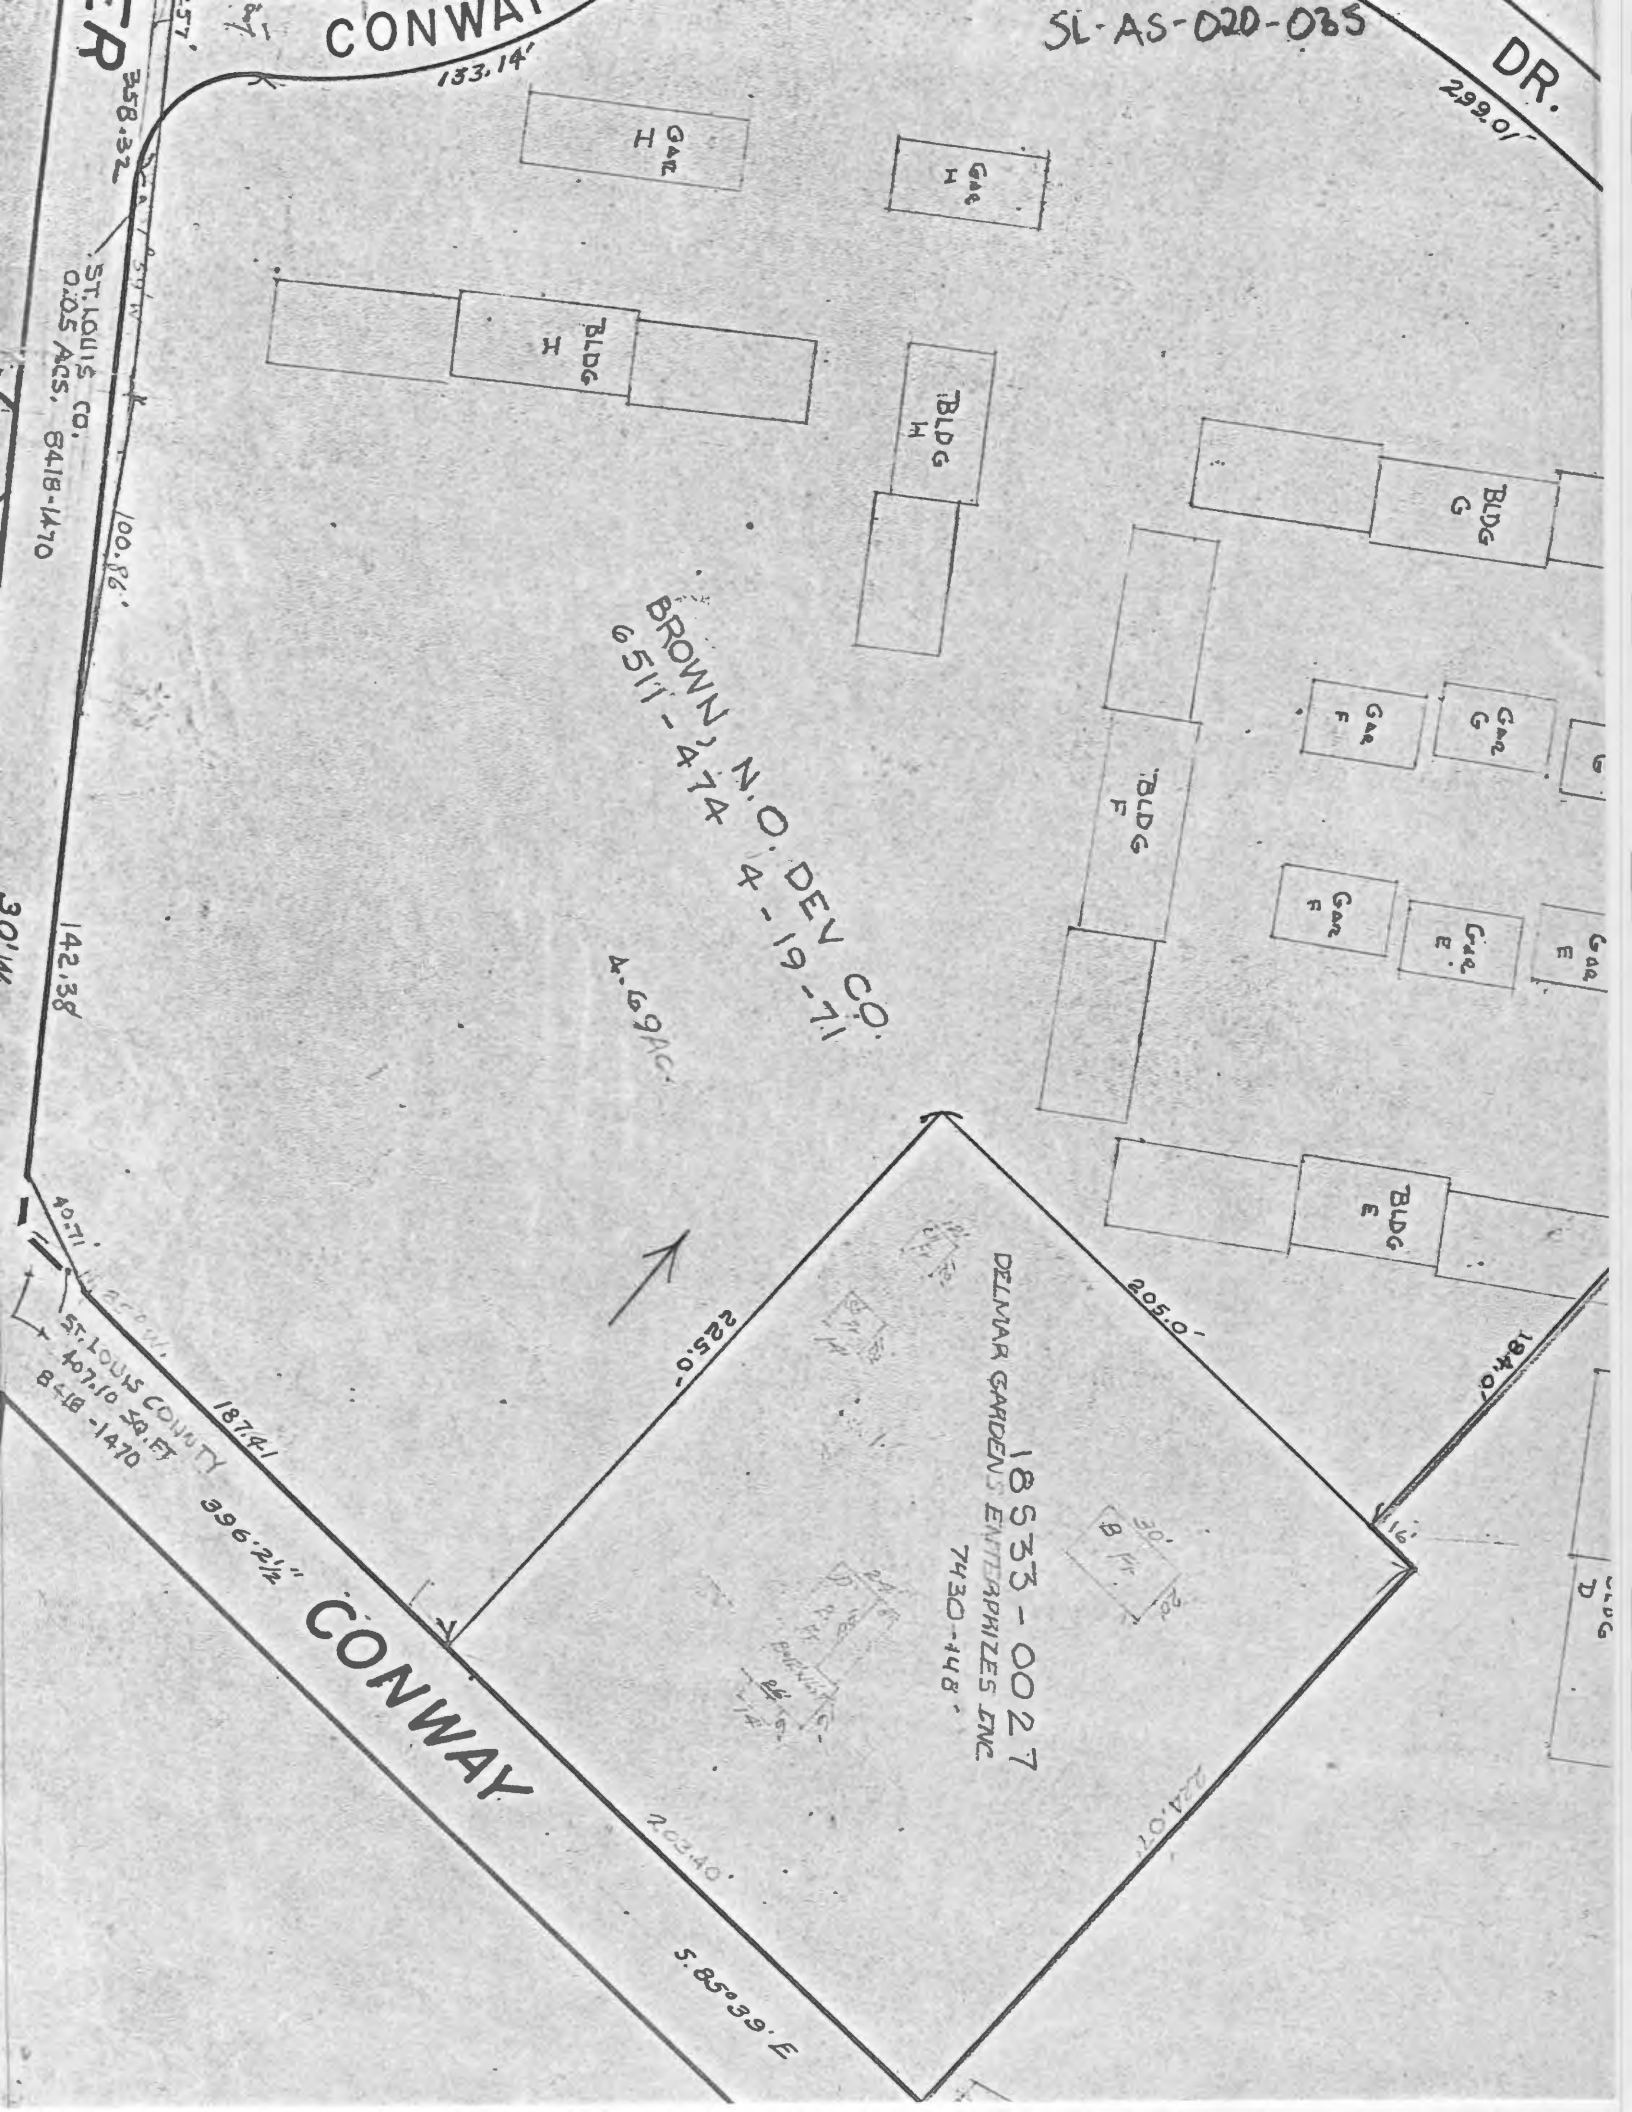



HISTORIC INVENTORY

1 No 18W110023		4 Present Name(s) R. C. Wardenburg House		1 No St. Louis	
2 County St. Louis		5 Other Name(s) 108 Eatherton Road			2 County St. Louis
3 Location of Negatives 34104-33					
6 Specific Location 2.50 acres in Survey 362, T45 R3.		16. Thematic Category		5 Other Name(s) 108 Eatherton Road North	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1910			
8 Site Plan with North Arrow		18 Style or Design Queen Anne/vernacular 18			
		19 Architect or Engineer		28. No. of Stories 1½	
		20 Contractor or Builder Glenn Ridgely		29. Basement? Yes ☒ No ☐	
		21. Original Use, if apparent residence DIA		30. Foundation Material concrete 65	
		22 Present Use residence		31. Wall Construction frame 64	
		23 Ownership Public ☐ Private ☒		32. Roof Type & Material GB cross gable, comp. 63	
		24. Owner's Name & Address, if known Violet Harstick, et al		33. No. of Bays Front 3 Side irr.	
		25. Open to Public? Yes ☐ No ☒		34. Wall Treatment 54 aluminum siding	
		26. Local Contact Person or Organization		35. Plan Shape rectangular	
		27. Other Surveys in Which Included		36. Changes (Explain in #42) porch Addition ☒ Altered ☒ Moved ☐ FK	
9 Coordinates UTM Lat Long				37. Condition Interior Exterior good	
0 Site ☐ Building ☒ Structure ☐ Object ☐				38. Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		12. Is It Eligible? Yes ☐ No ☐		39. Endangered? By What? Yes ☐ No ☒	
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		40. Visible from Public Road? Yes ☒ No ☐	
15 Name of Established District				41. Distance from and Frontage on Road	
12 Further Description of Important Features This house has a porch across the front with low hipped roof, latticework under the porch, turned posts and balusters, small brackets and returns, and a plain frieze. Windows are one-over-one. A bay window projects under the porch, while to the right of the front door is a smaller window. The gables at the front and on the north side have cornices dividing the triangle into two parts.					
13 History and Significance This land was part of the farm of William Rickard from the 1870's until 1910. The 1909 atlas does not indicate a house here. Two acres were sold in 1910 to R. C. Wardenburg, and he probably built this house. Wardenburg later bought additional land to the east. The contractor is said to have been Glenn Ridgely, who built a similar house at 18689 Wild Horse Creek Road. R. C. Wardenburg was probably Richard, the third son of Charles Wardenburg, who had a farm a little farther north. Charles died in 1917. Richard in '26.					
14 Description of Environment and Outbuildings A large frame shed is located northeast of the house and another outbuilding is closer to the southeast. The house sits near the Gumbo Bottom near the foot of the adjacent hills. (2)					
15 Sources of Information St. Louis County Recorder of Deeds, Book 245, p. 549; 426, 388. John Charles Hahn, 18689 Wild Horse Creek Road. St. Louis County Probate Court, #4761, 7238.					
46. Prepared by Esley Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)					

SL AS-020-036

MICKEY, TAYLOR R. ETAL
6836-325
11.80

18W12-0033

WILLIAM & SELINA
7436-2030
12-0044

10230

1550 Chs.

3.973 Chs.

60.2'

41744'

474.63'

HAESTIG, NIOLEY ETAL
6275-2453

25046'

18W11-0023

2609'

2609'

DUEVER, JOSEPH J. III &
Khanh
8183-0120

18W12-0022

15662 Chs.

ST. LOUIS

SOUTHWESTERN
WAS CHICAGO ROCK ISLAND
PACIFIC RR 7289-1114 DR

BOOK 8


04.22'

300'

ROAD

41744'

100'



SCALE: 1"=120'

SL-AS-020-036

CENTAUR

ENTHERTON

108

100





HISTORIC INVENTORY

1 No 19X640179		4 Present Name(s) "The Shadows"		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34200-13		133 Eatherton Road North		
6 Specific Location 3.55 acres, Lot 1, The Shadows		16 Thematic Category		2. County St. Louis
7 City or Town II Rural, Township & Vicinity Meramec Township		17 Date(s) or Period c. 1920		
8 Site Plan with North Arrow		18 Style or Design Vernacular 49		
		19 Architect or Engineer		4 Present Name(s) "The Shadows"
		20 Contractor or Builder		
		21 Original Use, if apparent residence 01A		
		22 Present Use residence		5 Other Name(s) 133 Eatherton Road North
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Howard L./Patricia Harvey 1008 Schulte Road St. Louis MO 63146		
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒		133 Eatherton Road North
10 Site ☐ Building ☐ Structure ☐ Object ☐		26 Local Contact Person or Organization		
11 On National Register? Yes ☐ No ☐		27 Other Surveys in Which Included		
12 Is It Eligible? Yes ☐ No ☐				Photo
13 Part of Estab Hist Dist? Yes ☐ No ☐		14 District Potent'l? Yes ☐ No ☐		
15 Name of Established District				
42 Further Description of Important Features The front part of this house is a one-story temple-fronted structure with square columns on stone pedestals. The front door has a broken pediment. The main pediment has a half-round window. The window sash is dark, with one-over-one windows. At the rear is a newer wing with two stories. It has a two-car garage facing the drive to the south and a metal stair and landing to a second story entry. A large brick chimney is centered.				46 Prepared by Esley Hamilton
43 History and Significance At the turn of the century this was part of a 42-acre tract of woods owned by John Bayer. He and his wife Caroline sold 8.35 acres of the tract in 1915 to Erich Picker of St. Louis. He paid only \$374.75. He died in 1918, and when his wife Louise sold the property in 1921, she received \$4,000, so the building must have been built during that time. The buyer was Virginia Hall Harsh, an unmarried woman of St. Louis. The present owner has heard that the house was built as a Catholic Girls Retreat, reached				
44 Description of Environment and Outbuildings This house sits at the top of a steep drive on the bluff overlooking the Gumbo Bottom. Trees screen the house from Eatherton Road in the summer.				
45 Sources of Information Thomas, <u>History of St. Louis County</u> (1911), p. 58 St. Louis County Recorder of Deeds, Book 360, page 454; 505, 422.				47 Organization St. Louis County Parks
46. Prepared by Esley Hamilton				
47. Organization St. Louis County Parks				
48. Date 8/89				49 Revision Date(s)
49 Revision Date(s)				
8/89				

The Shadows
133 Eatherton Road North

43. continued

from the city via the Monarch Station, which was at the foot of this hill. Possibly such a retreat was operated by Ms. Harsh. The Pickers seem to have used the property as a rural retreat too, since they continued to reside in the city. The name, "The Shadows", appears on a sign near the entrance to the property and is said to have been there for many years. It is appropriate because of the heavily wooded character of the land.

ST. LOUIS

N. 81° 35' E.

19

WAS CHICAGO ROCK ISLAND

Adolphus, Mark E. 1871-1891

18W110045

$$\begin{array}{r} 416.20 \\ 386.09 \\ \hline \end{array}$$

19X640179

123

30.20

8286-238

827.50

105.77

19W43-0081
2.992

19W43-00

SHELTON - DOUGLAS
7426-1

HEAD SUB, SEE PAGE 686A

FATHERTON



HISTORIC INVENTORY

SL-AS-020-038

1 No 18W410026		4 Present Name(s) William Rickard House		1 No 2 St. Louis 4 Present Name(s) William Rickard House
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-26		318 Eatherton Road N.		
6 Specific Location 1.05 acre in Survey 362 Township 45 Range 3		16. Thematic Category		2 St. Louis 4 Present Name(s) William Rickard House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1876		
8 Site Plan with North Arrow		18. Style or Design Queen Anne/Stick Style 17		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence 01		
		22 Present Use residence - vacant		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Keith K. & Cynthia L. McCowen 234 Old Hwy 100 Villa Ridge, MO 63089		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		2 St. Louis 4 Present Name(s) William Rickard House
10 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		
11 On National Register? Yes ☐ No ☒		28. No. of Stories 2		
12 Is It Eligible? Yes ☐ No ☐		29. Basement? Yes ☒ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		30. Foundation Material		
14. District Potent'l? Yes ☐ No ☐		31. Wall Construction WD		
15 Name of Established District		32. Roof Type & Material gabled, comp CG GB 43		
		33. No. of Bays Front irr 3 Side 2		
		34. Wall Treatment clapboard, siding 21 99		
		35. Plan Shape L		
		36. Changes (Explain in #42) Addition ☒ Moved ☐ Other 0H		
		37. Condition Interior 20 Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☒ No ☐ vacant		
		40. Visible from Public Road? Yes ☐ No ☐		
		41. Distance from and Frontage on Road /220'		
42 Further Description of Important Features L-shaped front has gabled or hipped gable in north front bay, with paneled frieze under cornice. Window frames and lower window lintels are continued by boards to create a grid or tartan pattern associated with the Stick Style. First floor windows in this wing and the center are paired. They and most others are two-over-two. A first-floor porch has a shed roof and three plain posts. The main entry opens from the side elevation of the porch. Windows have non-fitting shutters. An				5 Other Name(s) 318 Eatherton Road N.
43 History and Significance This is an unusual example in St. Louis of the so-called Stick Style, a term coined by Vincent Scully to describe what was thought of in the 19th-century as the Swiss Chalet style. The site was acquired in 1875 by William Rickard, and he probably built this house soon afterward. It appears in the 1878 atlas. He died in 1916 leaving a widow and eight children, including daughter Mae who had married a neighboring				
44 Description of Environment and Outbuildings This house sits on an almost perfectly flat site in an area of very rich bottomland.				
45 Sources of Information City Recorder of Deeds, Book 531, page 428. County Recorder of Deeds, Book 125, page 168. St. Louis County Probate Court, 4463, 32207				5 Other Name(s) 318 Eatherton Road N.
46. Prepared by E. Hamilton				
47. Organization St. Louis County Parks				
48. Date 8/89				5 Other Name(s) 318 Eatherton Road N.
49. Revision Date(s)				

William Rickard House
318 Eatherton Road N.

42. continued

addition in the form of a shed-roof additional dormer has been erected above the porch. It has wide siding in contrast to the thin clapboards of the main house and one one-over-one window. This raises to a full story the attic level which had been just a few feet above the first floor ceiling except at the gable end.

43. continued

Wardenburg. This tract was acquired by his eldest son William (Junior), who retained it until his death in 1962. It was then appraised at \$7,500.

N. 78° 39' E 309.76'


1215.726'

191-10-10-58 N 75° 01' E 30.

SL-AS-020-038

18W43-002A

Houska, William D. & M.J. H/W.
7848-2283




3.44

EATHERTON

N. 75° E. 284.10'

284.10'

151.50'



BAUER JOSEPH & MARILYN
191-10-10/58
1.28 AC.

18W41-0059

200.32'

300'

272.63

~~18W41-0037~~

18W41-0048
LEONARD, W.T.
7301-1728
1.72 AC.

435

100'
583.53'

21.67 AC.
18W43-0079
W.T. Leonard Company
6563-1930
25.726
195-1111/12



Mrs. DOWEN, KETTH KELLER & CYNTHIA L.
7413-2177

18W41-0026

1720.62' 219.61'

40'W

S. 78° 00' W 1013.35'
1229.941



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-040

1 No 18X340010	4 Present Name(s) Wild-Bayer Farm		1 No	
2 County St. Louis	5. Other Name(s) 323 Eatherton Road North			
3 Location of Negatives 34104-28				
6 Specific Location 137 acres in Survey 132, T45 R3	16. Thematic Category	28. No. of Stories 2½ - 2 - 1	2 County St. Louis	
7 City or Town If Rural, Township & Vicinity Chesterfield	17 Date(s) or Period constructed c. 1890	29. Basement? Yes ☒ No ☐		
8 Site Plan with North Arrow	18 Style or Design vernacular 49	30. Foundation Material stone 40		
	19. Architect or Engineer	31. Wall Construction frame wu		
	20. Contractor or Builder	32. Roof Type & Material 6 SD cross gable, shed, comp		
	21. Original Use, if apparent farm 01A	33. No. of Bays Front 2 Side 2		
	22 Present Use farm	34. Wall Treatment clapboard 21		
	23 Ownership Public ☐ Private ☒	35. Plan Shape irregular		
	24. Owner's Name & Address, if known Monarch Station Industrial Park, 12201 Lackland Road Inc. St. Louis, MO 63140	36. Changes (Explain in #42) Addition ☒ Altered ☐ Moved ☐		
9 Coordinates UTM Lat Long	25. Open to Public? Yes ☐ No ☒	37. Condition Interior Exterior fair		4 Present Name(s)
10 Site ☐ Building ☒ Structure ☐ Object ☐	26. Local Contact Person or Organization	38. Preservation Underway? Yes ☐ No ☒		
11. On National Register? Yes ☐ No ☒	27. Other Surveys in Which Included	39. Endangered? By What? Yes ☒ No ☐ development		
12. Is It Eligible? Yes ☐ No ☐		40. Visible from Public Road? Yes ☒ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		41. Distance from and Frontage on Road		
14. District Potent'l? Yes ☐ No ☐				
15 Name of Established District				
42 Further Description of Important Features Large plain house has ornamental porch on north front bay but no walkway leading up to it. Porch has steep shed roof with gable in front, both it and sides are decorated with shaped shingles. Porch posts are turned, but there is no balustrade. Foundation is large coursed stones. Basement windows have old shutters. Windows are mostly two-over-two. Rear wing has several additions, including two-story one with roof tied into main roof, and a one-story partially enclosed porch with steep shed-roof.			5 Other Name(s) 323 Eatherton Road North	
43 History and Significance This farmstead goes back at least to the 1870's, when it was owned by Edmund Wild, but the house appears to have been rebuilt in the 1890's. At that time the property was owned by John Bayer. Bayer was born in Germany in 1847 and came to this country in 1867. Starting as a tenant farmer, he eventually acquired two farms in the Gumbo Bottom, of which this was the larger. He also owned a wooded tract on the bluff				
44 Description of Environment and Outbuildings A large complex of farm buildings is south and east of the house. Most are vertical boards and are now in poor condition. The complex stands far back from the road and is reached by a gravel lane. The fields around the house are perfectly flat, part of the rich Gumbo Bottom.				
45 Sources of Information County Atlases William L. Thomas, History of St. Louis County (1911), Vol. II, p. 58.				
46. Prepared by E. Hamilton				
47. Organization St. Louis County Parks				
48. Date 8/89			49 Revision Date(s)	

Wild-Bayer Farm
323 Eatherton Road North

42. continued

The present owners of the property are leasing it for farming at present but apparently intend to develop it as an industrial park in the future.

43. continued


immediately to the south of this farm. In 1913 he finally moved from the farm he had rented for so many years and built a new house at 18450 Olive Street Road. He probably never lived here, but this house is nevertheless larger than most farmhouses in this neighborhood.

1659.65'

FEATHERTON

3511.00

M.O.A.

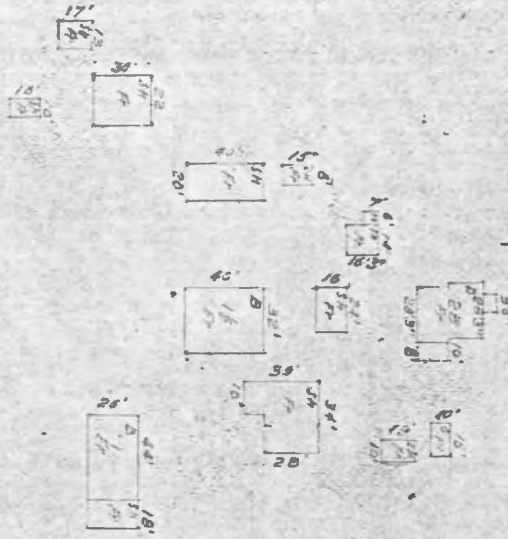

18X34-1032
13701A
STATION
INDUSTRIAL PARK

MOORETECH, STATION INDUSTRIAL PARK INC.

3561.92'

6825-1032

7th, ~~100th~~ 87.99 Ac.

12.12

PT. 18X33 - 0033

44.77'

4400

5311.151



1 No 18W430046	4 Present Name(s) Hans M. Homann House	1 No
2 County St. Louis	5 Other Name(s) 	
3 Location of Negatives 	414 Eatherton Road North	

6 Specific Location 3 acres, south part of Lot 1, E. Kroenung Estate in Survey 362, T45 R3	16. Thematic Category 17 Date(s) or Period constructed c. 1915	28. No. of Stories 1½ 29. Basement? Yes ☒ No ☐	2. County St. Louis
7 City or Town II Rural, Township & Vicinity Chesterfield	18. Style or Design Victorian vernacular 18	30. Foundation Material concrete 5	
8 Site Plan with North Arrow 	19. Architect or Engineer 	31. Wall Construction frame wu	
9 Coordinates UTM Lat Long	20. Contractor or Builder 	32. Roof Type & Material 6 sp 50 cross gable, metal	
10 Site ☐ Building ☒ Structure ☐ Object ☐	21. Original Use, if apparent residence 017	33. No. of Bays Front 2 Side 3	
11 On National Register? Yes ☐ No ☒	22 Present Use residence	34. Wall Treatment 54 aluminum siding	
12 Is It Eligible? Yes ☐ No ☐	23 Ownership Public ☐ Private ☒	35. Plan Shape rectangular	
13 Part of Estab Hist Dist? Yes ☐ No ☒	24. Owner's Name & Address, if known Jewel & Clara Bridges	36. Changes (Explain in #42) porch Addition 1 FL altered 11	
14 District Potent'l? Yes ☐ No ☒	25. Open to Public? Yes ☐ No ☒	37. Condition Interior Exterior fair	
15 Name of Established District 	26. Local Contact Person or Organization 	38. Preservation Underway? Yes ☐ No ☒	
27. Other Surveys in Which Included 		39. Endangered? By What? Yes ☐ No ☒	
40. Visible from Public Road? Yes ☒ No ☐		41. Distance from and Frontage on Road /215 ft.	

42 Further Description of Important Features The front porch has permastone base and wrought iron posts supporting a hipped roof. Windows are one-over-one; some are covered with insulating plastic. A shed roof porch in back has a concrete-block base and wrought-iron posts and railing.	Photo	5 Other Name(s) 414 Eatherton Road North
43 History and Significance Ernest Kroenung acquired a 40-acre tract in Survey 362 in 1874. He died in 1894 but this land, along with others totalling 145.159 acres, remained the property of his heirs until 1914, when it was sold to Hans M. Homann. Homann probably built this house soon after.		
44 Description of Environment and Outbuildings The property includes a barn and several other vertical board outbuildings, all located east of the house.		

45 Sources of Information St. Louis City Recorder of Deeds, Book 515, page 45 St. Louis County Recorder of Deeds, Book 344, page 412	46. Prepared by Esley Hamilton 47. Organization St. Louis County Parks 48. Date 8/89
--	--

SL-AS 020-039



411

WARDENBURG ROAD

EATHERTON ROAD NORTH

318



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 16R540063 2 County St. Louis 3 Location of Negatives 34081-13	4 Present Name(s) St. Louis County Water Company Central County Plant 1 & 2 5 Other Name(s) 901 Hog Hollow Road	1 No
6 Specific Location 195.38 acres in Talbot Estate Lots 1,2,3,4&5 and Surveys 120 and 137, T46 R4 7 City or Town II Rural, Township & Vicinity Maryland Heights 8 Site Plan with North Arrow	16 Thematic Category 17 Date(s) or Period constructed 1933-1938 18 Style or Design Art Deco 19 Architect or Engineer United Engineers & Contractors 20 Contractor or Builder Hornet Shufin 21 Original Use, if apparent Water works 22 Present Use Water works 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known St. Louis County Water Company 535 N. New Ballas Rd, St. Louis 63141 25 Open to Public? Yes ☐ No ☒ 26 Local Contact Person or Organization 27 Other Surveys in Which Included	2. County St. Louis 4 Present Name(s) St. Louis County Water Company, Central County Plant 1 & 2
9 Coordinates UTM Lat Long 10 Site ☐ Building ☒ Structure ☐ Object ☐ 11 On National Register? Yes ☐ No ☒ 12 Is Eligible? Yes ☐ No ☐ 13 Part of Estab Hist Dist? Yes ☐ No ☒ 14 District Potent'l? Yes ☒ No ☐ 15 Name of Established District	28 No. of Stories 1 & 2 29 Basement? Yes ☐ No ☒ 30 Foundation Material concrete 31 Wall Construction brick 32 Roof Type & Material flat, tar 33 No. of Bays Front irr 15 Side irr 34 Wall Treatment stretcher bond 35 Plan Shape irregular 36 Changes (Explain in #42) Addition ☒ Altered ☐ Moved ☐ 37 Condition Interior good Exterior good 38 Preservation Underway? Yes ☐ No ☒ 39 Endangered? By What? Yes ☐ No ☒ 40 Visible from Public Road? Yes ☒ No ☐ 41 Distance from and Frontage on Road	5 Other Name(s) 901 Hog Hollow Road
42 Further Description of Important Features Complex of buildings is mostly in matching style of yellow brick with stone or cast concrete trim. Electric station at south end has four bays of one-story construction and two bays of two-story. Bays are outlined by brick piers rising to capped parapets. Windows are deepset and have hinged metal sash. The Electric Station has a large superstructure of metal girders to which power lines are attached. Filter Plant 1, immediately to the north has a long low concrete structure in front divided into eight 43 History and Significance The St. Louis County Water Company was formed from a number of smaller companies in the early years of the century. It inherited a pumping station across the street from this site from the West St. Louis Company and expanded to this site in the early 1930's. The first unit in this complex to be constructed was the Electric Station at the south end of the site (foreground in this photo). Then came the Chemical House, a 44 Description of Environment and Outbuildings The complex stands on a nearly flat treeless site a few hundred yards east of the Missouri River. On the east side of Hog Hollow Road is an older complex also owned by the County Water Company. 45 Sources of Information St. Louis County Water Company		Photo
46 Prepared by E. Hamilton 47 Organization St. Louis County Parks 48 Date 8/89 49 Revision Date(s)		

SL-AS-020-042

St. Louis County Water Company
 Central County Plant 1 & 2
 901 Hog Hollow Road

42. continued

bays of concrete fins with rounded tops. Behind this is a taller brick structure with detailing similar to the Electric Station but with paired windows and without the elaborately accented parapet. The Chemical House is a smaller structure at the north end of the complex, close in design to the Electric Station but fully two stories in height.

43. continued

similar design at the north end. In 1936 the large Filter Plant was started and it was completed two years later. The style of these buildings is typical of the modernistic work of the era, given more drama by the flat, unobstructed setting. In 1952-53 a second filter plant was added to the complex by Horner & Shifrin, engineers. It reads as two stories in front and is built of slightly paler yellow brick in a stripped down International Modern style.

Chem.	Filter 1	Filter 2
2-1		2
WD	WD	WD
30	65	30
Ft	65	Ft
99 roof meet	Ft PR	
65	99	
RC	RC	RC

LEGEND

A - CHEMICAL HOUSE - 1935 CONST.

- UNITED ENGINEERS &
CONSTRUCTORS, INC.

B - FILTER PLANT 1 - 1936-1938 CONST.

- UNITED ENGINEERS
& CONSTRUCTORS, INC.

C - FILTER PLANT 2 - 1952-1953 CONST.

- HORNER & SHIFRIN

D - ELECTRIC STATION - 1933 CONST.


- UNITED ENGINEERS
& CONSTRUCTORS, INC.

E - SHOP BUILDING - 1923(?) CONST.


- ARCHITECT - UNKNOWN

NO.	DATE	DESCRIPTION OF REVISION	BY	APP'D	
ST. LOUIS COUNTY WATER COMPANY					
CREVE COEUR, MO					
CENTRAL COUNTY PLANT 1 & 2					
DATES OF CONSTRUCTION					
AND					
ARCHITECT					
SCALE: 1" = 100'		CHECKED:	WORK ORDER		
DESIGNED:		APPROVED:			
DRAWN: PB		DATE: 8/7/89	SHEET 1 OF 1		

E

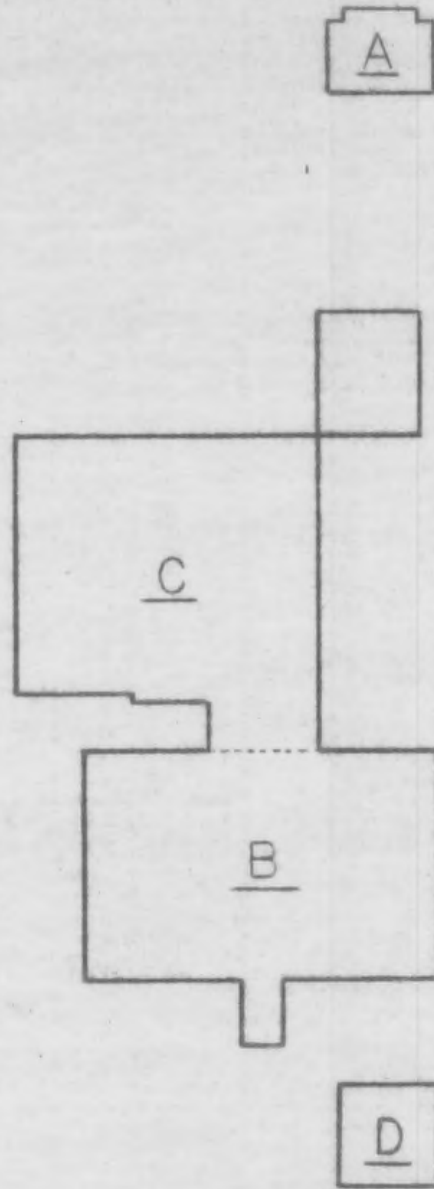

J & HOG HOLLOW ROAD

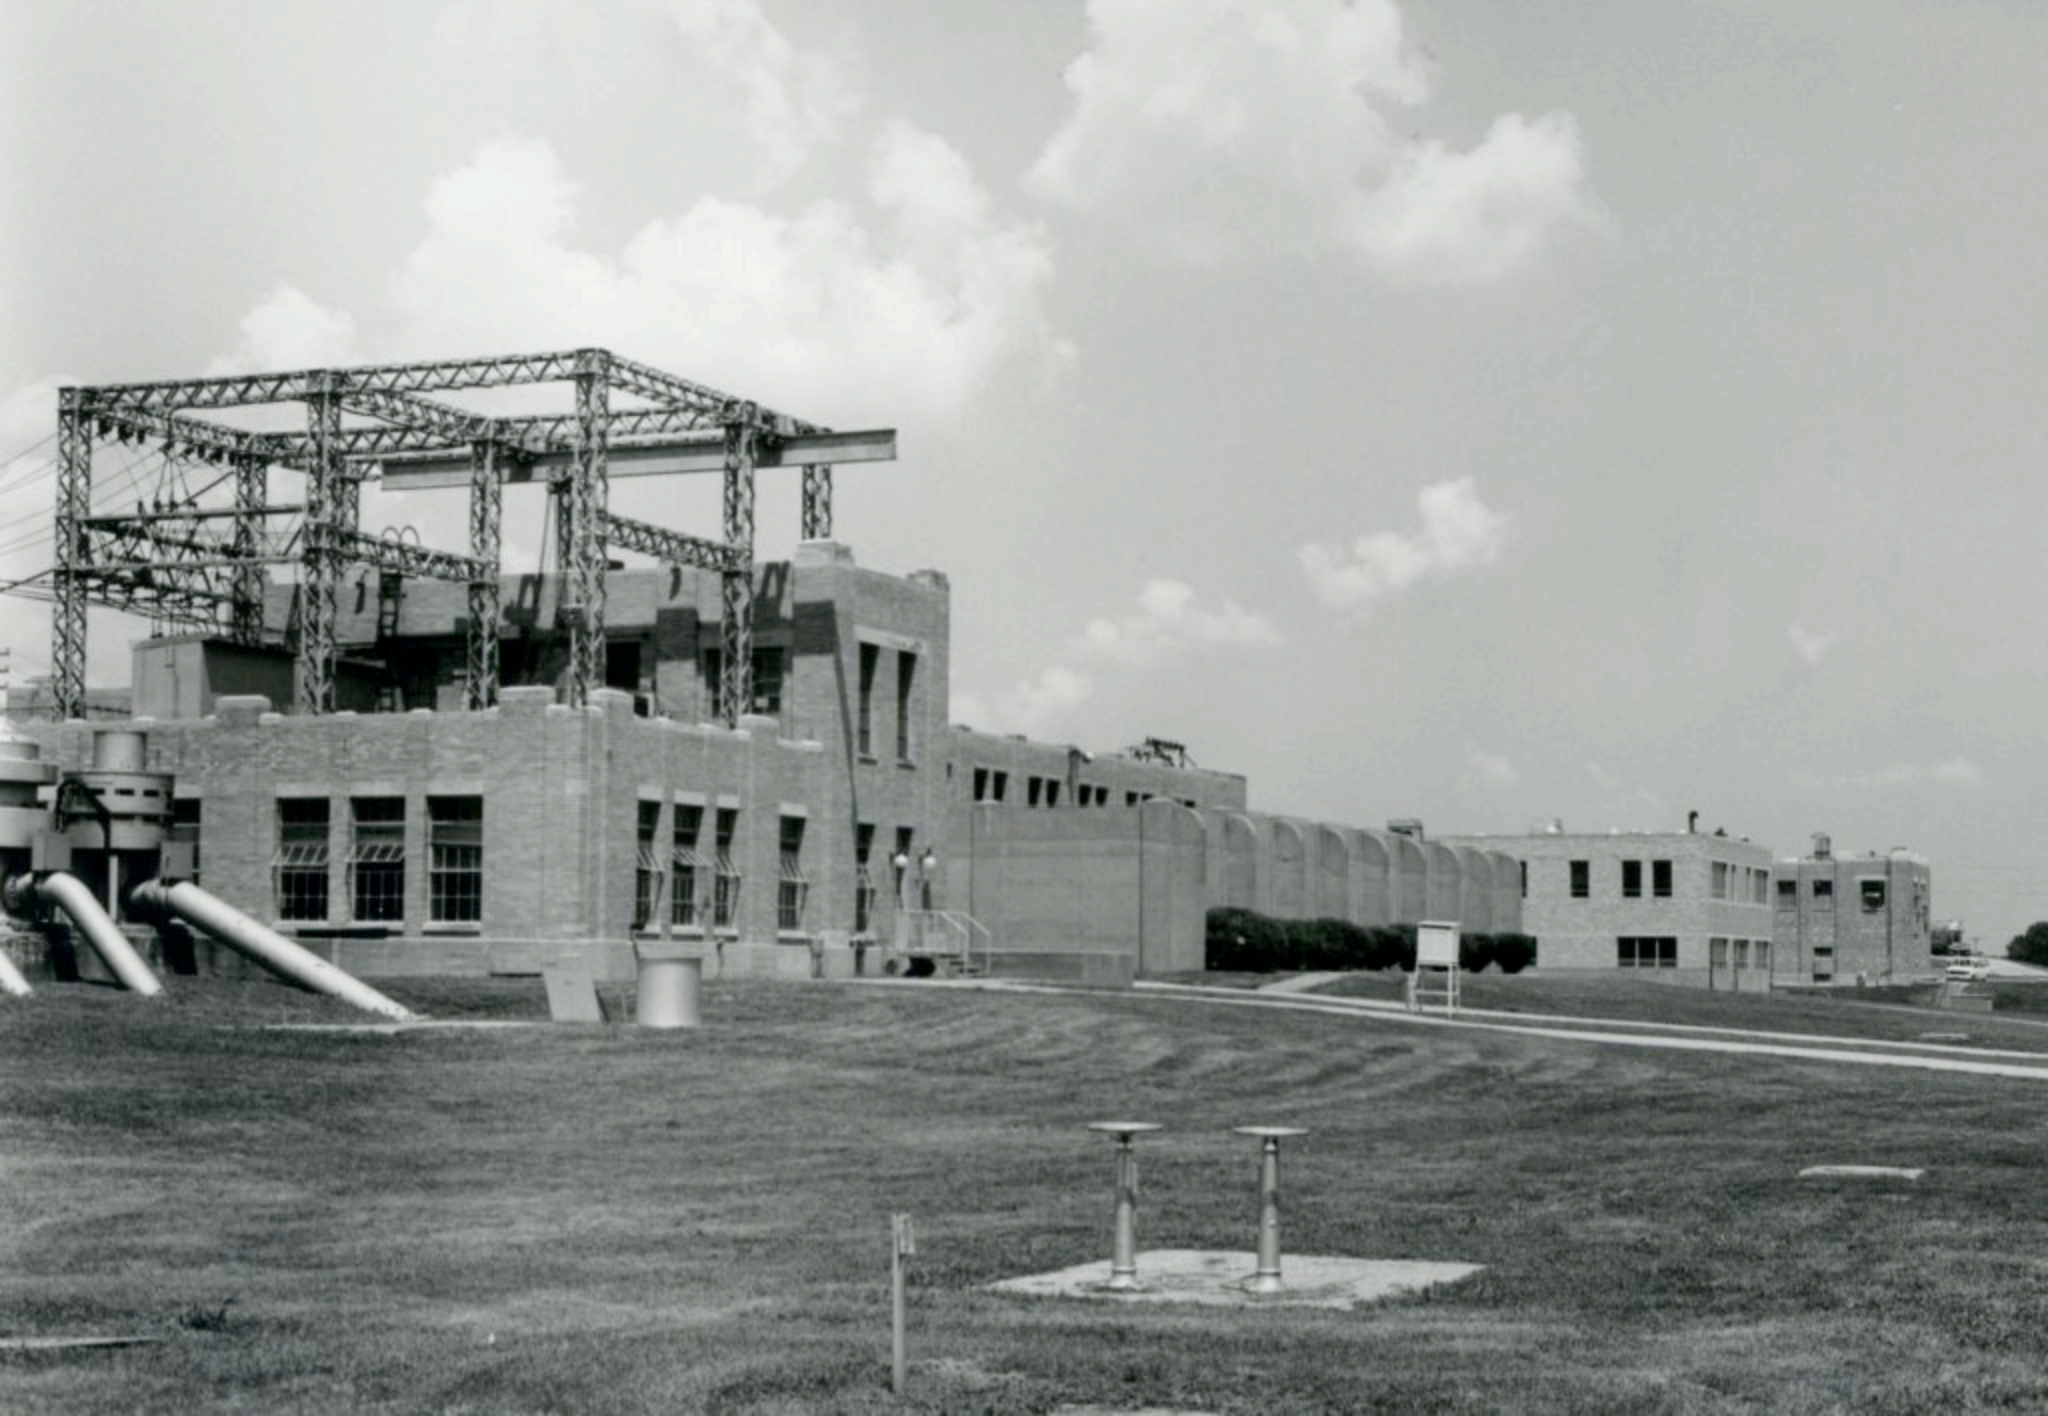

1 No 16R640011		4 Present Name(s) Shop Building, St. Louis County Water Company		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34081-14		945 Hog Hollow Road		
6 Specific Location 54.69 acres in Survey 2030 T46, R4, Lots 6&7 of D. Talbot SD		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed c. 1923		
		18. Style or Design Beaux Arts 56 99		
		19. Architect or Engineer		
7 City or Town If Rural, Township & Vicinity Maryland Heights		20. Contractor or Builder		4 Present Name(s)
		21. Original Use, if apparent Shop building 10C		
		22 Present Use Shop building		
		23 Ownership Public ☐ Private ☒		
8 Site Plan with North Arrow		24. Owner's Name & Address, if known St. Louis County Water Company 535 N. New Ballas Rd, 63141		5 Other Name(s) 945 Hog Hollow Road
		25. Open to Public? Yes ☐ No ☒		
		26. Local Contact Person or Organization		
		27. Other Surveys in Which Included		
9 Coordinates UTM Lat Long		28. No. of Stories		St. Louis
10 Site ☐ Building ☒ Structure ☐ Object ☐		29. Basement? Yes ☐ No ☒		
		30. Foundation Material concrete 65		
31. Wall Construction brick 20				
32. Roof Type & Material HP hip, corrugated metal				
33. No. of Bays Front 11 Side 3				
34. Wall Treatment stretcher bond 30				
35. Plan Shape rectangular				
36. Changes (Explain in #42) Addition ☐ Altered ☒ Moved ☐				
37. Condition Interior 30 40 Exterior good				
38. Preservation Underway? Yes ☐ No ☒				
39. Endangered? By What? Yes ☐ No ☒				
40. Visible from Public Road? Yes ☒ No ☐				
41. Distance from and Frontage on Road				
42 Further Description of Important Features Large but simple building has ten round-arched windows and one door on street side, round-arched doors and segmental-arched windows on ends. Windows have stone lugsills and radiating bricks around arches. Corners have brick quoining. Center bays on ends stand out about a brick's length. Large circular metal vents stand on roofridge.				
43 History and Significance This land was bought from the heirs of Henry Jackson by the West St. Louis Water & Light Company about 1900 and a basin and pump house were standing by 1909, taking in water from the Missouri River a few hundred yards to the west. The St. Louis County Water Company was formed by the merger of several smaller companies such as this one in the first two decades of this century. Since construction records have not been located				
44 Description of Environment and Outbuildings Building stands near road, with large yard for outdoor equipment to south and east. Whole site is in Missouri River Bottom, across street from larger County Water Company facility.				
45 Sources of Information St. Louis County Water Company			46. Prepared by E. Hamilton	
			47. Organization St. Louis County Parks	
			48. Date 8/89	
			49. Revision Date(s)	

Shop Building, St. Louis County Water Company
945 Hog Hollow Road

43. continued

it may date back to the West St. Louis Company, but current thinking
dates the building to about 1923.



HISTORIC INVENTORY

SL-AS-020-041

7 buildings

1 No 16R110022		4 Present Name(s) St. Louis Water Works, Howards Bend Station		Fitter House Intake House	
2 County St. Louis		5 Other Name(s) Howard Bend Station Road		Pumphouse #1 Boiler House Pumphouse #2 Coal Receiving House Coagulant House	
3 Location of Negatives 34081-21 through 25		16 Thematic Category 030		28 No. of Stories 1 & 2	
Specific Location 121.45 acres, parts of lots 7, 8, & 9 of Logan Hunton Farm in Survey 120, Township 46, Range 4		17 Date(s) or Period constructed 1927		29 Basement? Yes ☐ No ☒	
7 City or Town II Rural, Township & Vicinity Chesterfield		18 Style or Design Beaux Arts 56 99		30 Foundation Material concrete	
8 Site Plan with North Arrow		19 Architect or Engineer St. Louis Water Division		31 Wall Construction stone 40	
		20 Contractor or Builder		32 Roof Type & Material flat, tar	
		21 Original Use, if apparent water works 100		33 No. of Bays Front 7 Side 3	
		22 Present Use water works		34 Wall Treatment rock-face & ashlar	
		23 Ownership Public ☒ Private ☐		35 Plan Shape Varying	
		24 Owner's Name & Address, if known St. Louis City Water Works, 1220 Carr Lane Avenue, St. Louis, MO 63104		36 Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☒ No ☐		37 Condition Interior Exterior good	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization Frank Fields 469-1901		38 Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		39 Endangered? By What? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☐				40 Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒				41 Distance from and Frontage on Road	
14 District Potent'l? Yes ☒ No ☐					
15 Name of Established District					
42 Further Description of Important Features This campus-like complex consists of 4 major buildings and several smaller ones. They are all built of small-size rockfaced stones laid in broken courses, but with substantial amounts of ashlar stone as quoins, window surrounds, cornices, and other trim. The main building has large round-arched multipane windows. The center bay breaks forward, and the parapet above the modillioned cornice has a gable-shaped rise to fit an		Photo			
43 History and Significance The City of St. Louis bought this site from August W. Reising in the middle of 1923 for \$2442. The buildings were designed in 1926 and 1927 by the staff of the St. Louis City Water Division, with the assistance of the Board of Public Service. The designer and engineer who initialed many of the surviving drawings was Elton Easterday. His draftsman was Milton Buchmueller.		44 Description of Environment and Outbuildings This complex sits on a flat site between the St. Louis-Southwestern railroad tracks on the south and the Missouri River levee on the north. It is approached from Olive Boulevard by a private drive called Howard Bend Station Road and also from Hog Hollow Road by a private drive. White Road is a paper street adjacent.		45 Sources of Information St. Louis County Recorder of Deeds, Book 594, page 437 Stanley Fletcher, St. Louis Water Division, 771-4880	
		46 Prepared by E. Hamilton		47 Organization St. Louis County Parks	
		48 Date 9/89		49 Revision Date(s)	

1 No
2. County
St. Louis4 Present Name(s)
St. Louis Water Works5 Other Name(s)
Howard Bend Station Road

St. Louis Water Works
Howard Bend Station Road

42. continued

inscription plaque of large dimensions. It says "St. Louis Water Works/Howard Bend Station." This building serves as the intake house, and it stretches back some distance toward the river. Although articulated as one story it actually has three inside. Adjacent to it is the more monumental Boiler House, articulated like the Intake House as a series of tall arches, but with a tall podium as the first floor, and a good-sized attic story on top. Next to it is a tall free-standing brick chimney that can be seen up and down the river for some distance. To the east of the Boiler House is the small one-story Coal Receiving House, a t-shaped structure, which has a long, closed, angled conveyor to the Boiler House. Located at right angles to this complex and defining the west side of the campus is the Filter Plant. It has rectangular window openings, two on the second floor for every large one on the first floor. The main entry has a large toplight under a segmental arch. The parapet above is stepped up and has another, smaller inscription panel giving the name of the building. The fourth major building is the Coagulant House, so named on panels above both of the balanced front doors. ~~The two main stories of~~ this building are outlined by ashlar quoining and have rectangular multipane windows. The building was designed for rail tracks to go right through it just behind the north facade, and the segmental-arched openings at either end are outlined by channeled stonework. Above the parapet, this building has a large penthouse with an additional story running the length of the building and two belvederes over the doors above that. To the south and to one side of the Coagulant House are two small Pump Houses, designed like garden pavilions or small rail stations.

MISSOURI

SL-AS-020-041



RIVER

WHITE

N. 32° 09' W

2726' D.

Balance of bldgs owned by
City of St. Louis, are drawn on
Drawing #10. Bellefontaine School District



Chimney




Secondary Coagulation

ROAD

ROAD

R.R.

R.R.

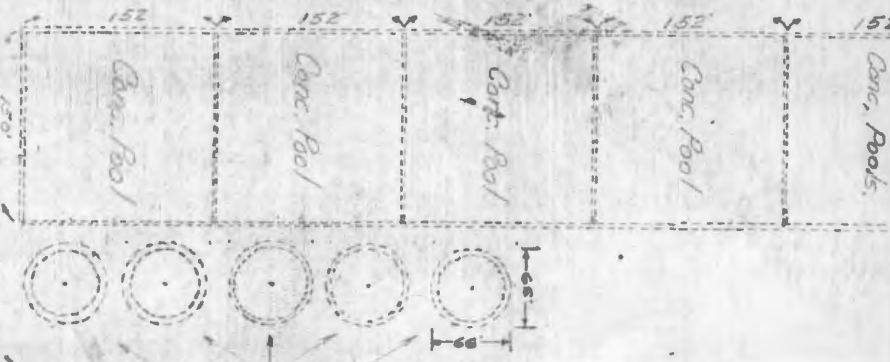

R.R.

PT. 16 R 11 - 0022

City of St. Louis Water Works


72.15 AC.
R. 123.53 AC.
R. 123.53 AC.

2602' D.







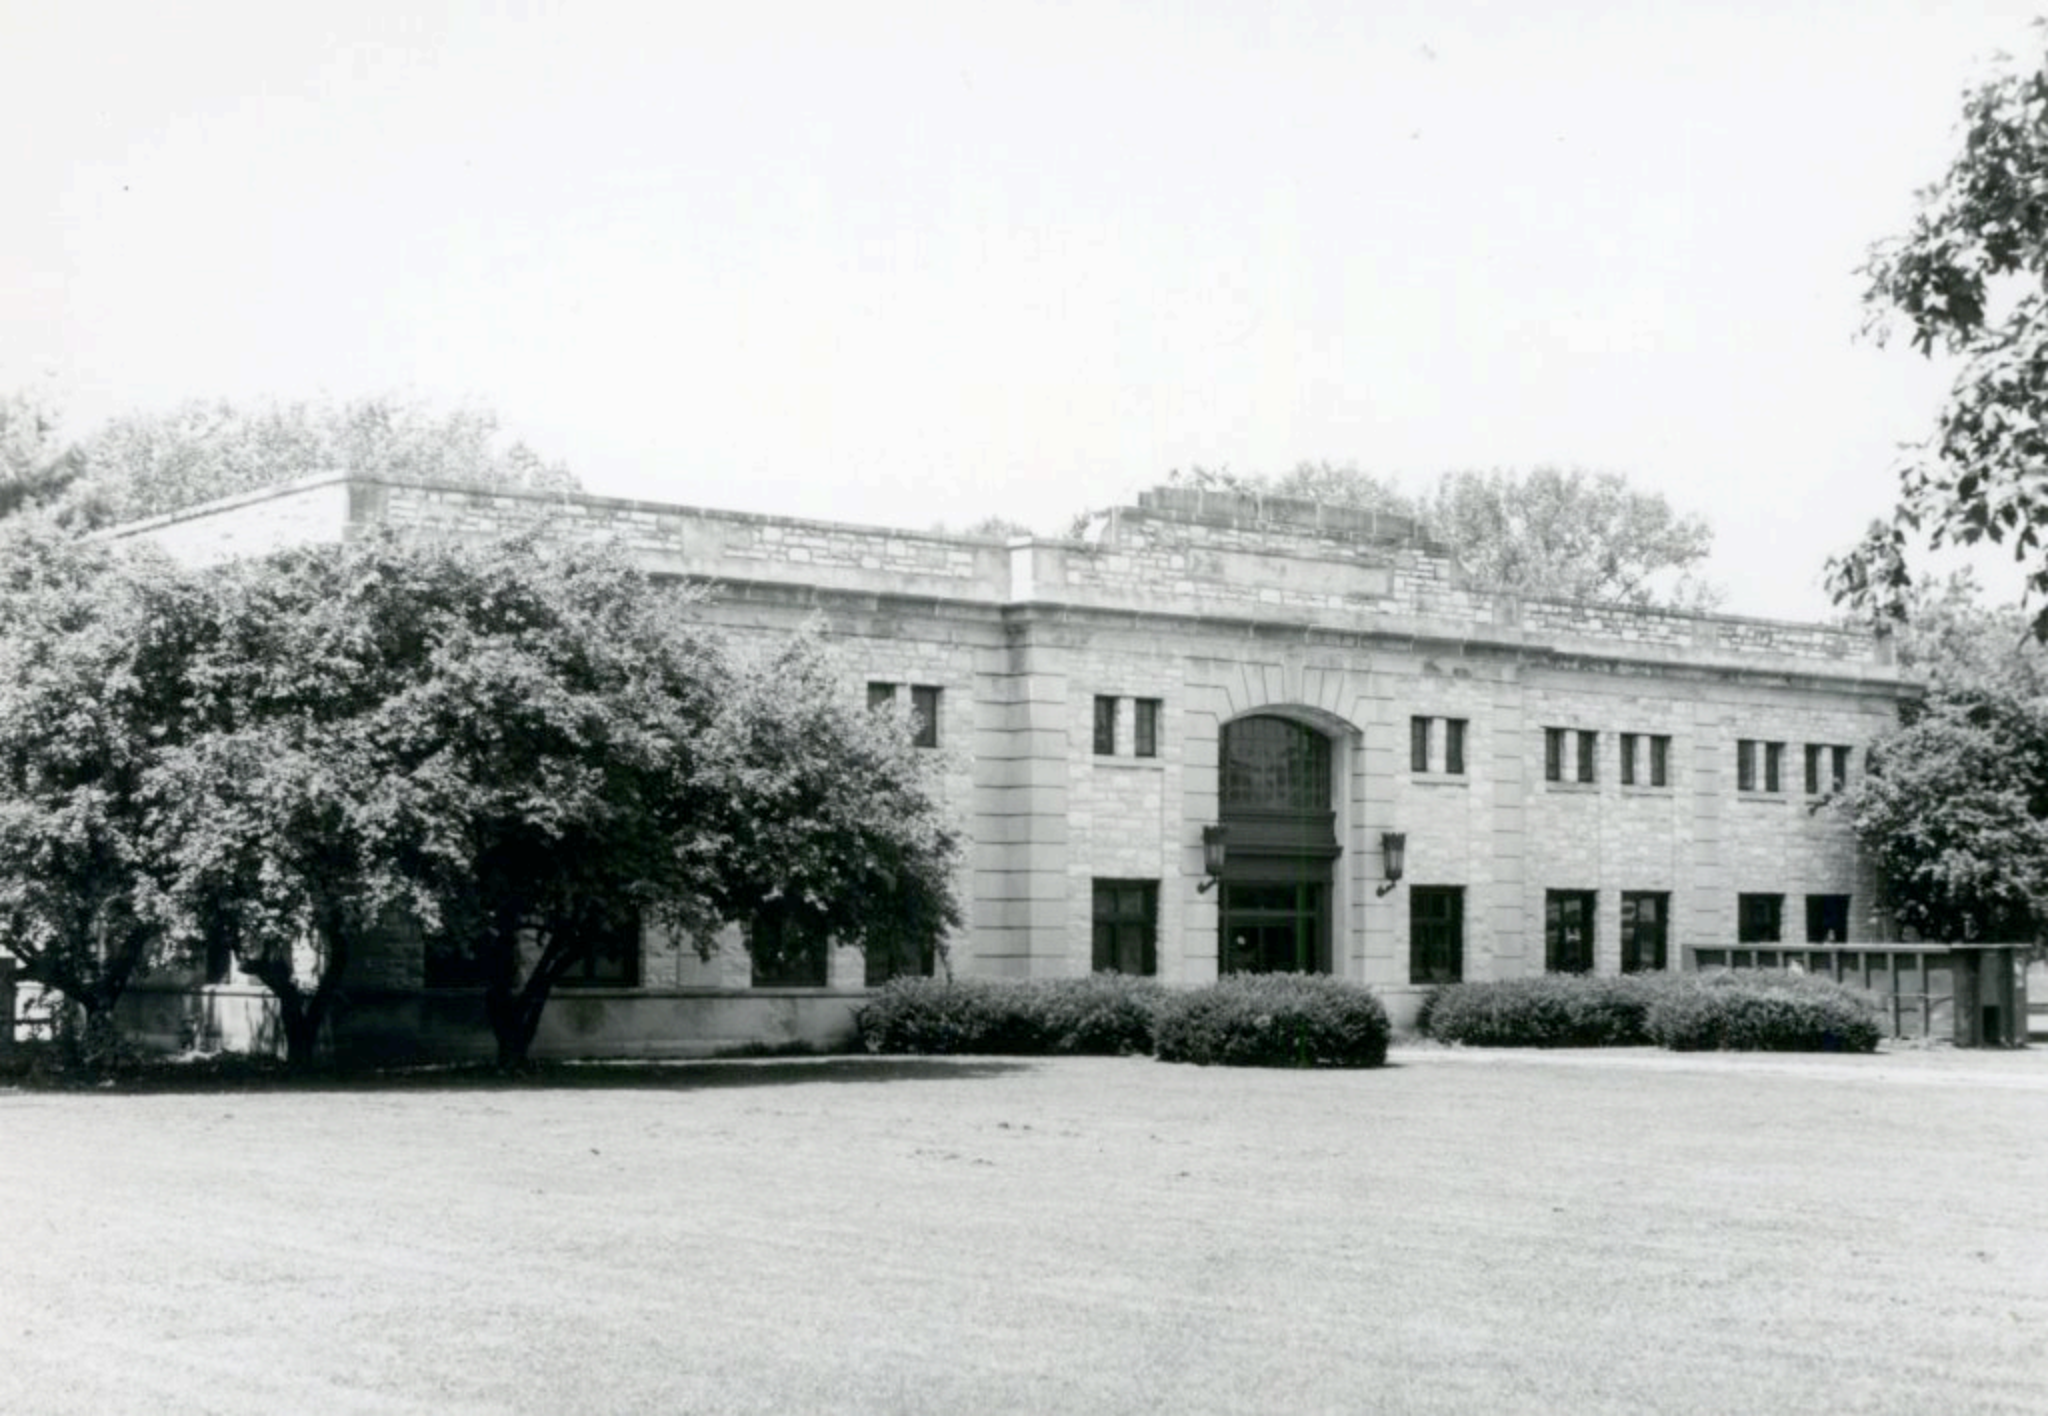

HISTORIC INVENTORY

SL-AS-020-044

1 No 10R642311		4 Present Name(s) Van Raalte-Kerckhoff House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34088-2		440 Hunters Hill		
6 Specific Location .64 acres/Conway Meadows, Plat 6 Lot 6 Resub		16. Thematic Category 030		2. County St. Louis 4 Present Name(s) Van Raalte-Kerckhoff House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1930		
8 Site Plan with North Arrow		18. Style or Design Tudor Revival 8 49		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence 01A		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Edward M. Harris III		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		4. Present Name(s) Van Raalte-Kerckhoff House
0 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		
1 On National Register? Yes ☐ No ☒		28. No. of Stories 2		
2 Part of Estab Hist Dist? Yes ☐ No ☒		29. Basement? Yes ☒ No ☐		
3 Name of Established District		30. Foundation Material concrete 65		
		31. Wall Construction brick 40		
		32. Roof Type & Material gable, shake 6B 25		
		33. No. of Bays Front irr. Side irr.		
		34. Wall Treatment 30 American common bond		
		35. Plan Shape U-shaped		
		36. Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐		5 Other Name(s) 440 Hunter's Hill
		37. Condition Interior Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road 297/irr.		
42 Further Description of Important Features This very picturesque house has its main wing at the south end of a U-shaped walled court. Lower wings across the center and at the north end. Part of the north wing is half-timbered with brick nogging. The lower part has the gable end with rows of rectangular openings in the style of a pigeon house. A pergola is attached to the west end of the wing. The center wing is a timbered loggia, partly enclosed. The courtyard is closed with an arched wrought-iron gate. It has large cut-out initials (cont'd)				Photo
43 History and Significance This house was built for Julius R. Van Raalte, who was vice-president of the Pine Investment Co. and head of the J. R. Van Raalte Mortgage Co. He purchased this property in 1927, and his family recalls moving in 1930. For a time they kept an apartment at 4950 Lindell Blvd. Julius Van Raalte was associated in business and was probably the son of Simon Van Raalte, who established a jewelry store in St. Louis in				
44 Description of Environment and Outbuildings The house now sits in a modern subdivision, but it still has old trees around it. The street has been cut down somewhat from the level of the lawns.				
45 Sources of Information Mr. & Mrs. Edward M. Harris III, 878-7787 St. Louis County Recorder of Deeds, Book 803, pages 503 and 506 House and Garden, May 1938, cover illustration Missouri Historical Society. Bulletin, Vol. 27 (Jan. 1971), p. 165				46. Prepared by Esley Hamilton
47. Organization St. Louis County Parks				
48. Date 8/89				49 Revision Date(s)

Van Raalte-Kerckhoff House
440 Hunters Hill

42. continued

"EMH." The main block is slightly lower than two stories high. Its upper windows rise above the roofline to form "additional" dormers with hipped roofs. Most windows are multipane casements in dark frames. The outside chimney on the courtyard side has a small oriel window, and a larger bay window is on the west end. A second chimney rises from the east end. One entry is in a shed-roof or lean-to wing on the courtyard side. The door is set in a timbered frame. The south side of the main wing has a timbered screened porch two bays deep under a bellcast saltbox roof. According to the present owner, many of the doors were handmade on the site. Flooring and beams were salvaged from an old tobacco warehouse in St. Louis.

43. continued

1874. The family called this estate, which had over 100 acres, "4-J Farm," probably from the pattern of four birds on the firescreen in the house. About 1950 the property was acquired by Elmer Martin Kerckhoff. He called it "Elm Farm." He was the son of Daniel Charles Kerckhoff, who had established an elaborate estate in Crescent, and the grandson of Martin W. Kerckhoff, the founder of Pevely Dairy. Elmer served as vice-president, secretary, and treasurer of the firm. He also served as president of the Muscular Dystrophy Association of St. Louis and president of the Missouri Chapter of the Navy League. Born in 1900, he died in 1970. This property passed to his son Kenneth, and after his divorce was purchased by the developer Joe Mason, who built the modern subdivision around it now.

Tourmour, Eugene & Mary
(Evel)
Sept. 13, 1941

TRUMBULL, LUCY
1010-2317
8646

18R32-0010
ADDN
12/4/51

18R3210054

7240-1367

St. Louis County, Mo.
155-9726-63
St. Louis County, Mo.
155-9726-63

ROAD
623.60

SEE

CONWAY MEADO
SEE PAGE 9

CONWAY MEADOW PL
SEE PAGE 948 B

AT 2

PT.



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY


1 No 20U620011		4 Present Name(s) Schumm-Steiner House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34363-32		2103 Kehrs Mill Road		
6 Specific Location 2 acres in NW ¼ of Section 20, T45, R4		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed c. 1915		
7 City or Town If Rural, Township & Vicinity Clarkson Valley		18. Style or Design Bungalow 22		4 Present Name(s) Schumm-Steiner House
8 Site Plan with North Arrow		19. Architect or Engineer		
9 Coordinates UTM Lat Long		20. Contractor or Builder		5 Other Name(s) 2103 Kehrs Mill Road
		21. Original Use, if apparent residence 01A		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
10 Site ☐ Building ☒ Structure ☐ Object ☐		24 Owner's Name & Address, if known Bobby L. & Arlene Haynes P.O. Box 1360, Ballwin MO 63022		Photo
11. On National Register? Yes ☐ No ☒		25. Open to Public? Yes ☐ No ☒		
12 Is It Eligible? Yes ☐ No ☐		26. Local Contact Person or Organization		(continued)
13 Part of Estab Hist Dist? Yes ☐ No ☒		27. Other Surveys in Which Included		
14. District Potent'l? Yes ☐ No ☒		28. No. of Stories 1½		29. Basement? Yes ☒ No ☐
15 Name of Established District		29. Foundation Material concrete block 65		
42 Further Description of Important Features The verandah across the front has four large square posts supported by a concrete block parapet. Above this is a hip-roofed two-window dormer with shingled sides and projecting rafters. A brick chimney rises at the rear of the roof ridge. Windows are one-over-one. The back of the house has a small screen porch.		30. Wall Construction concrete block CB		31. Roof Type & Material hip, comp. 4D 63
		31. No. of Bays Front 3 Side 3		
43 History and Significance This house is an unusual example in St. Louis County of the use of concrete blocks in high-style design. Two districts of large concrete block houses in St. Louis have been sited on the National Register: the Goodfellow-Julian District and the Oakhurst Place District. All the houses in those districts date from about 1905, about ten years before this one, but trends were often slow arriving in the county.		32. Wall Treatment rusticated 65		33. Plan Shape rectangular
		33. Changes (Explain in #42) R1 Addition ☐ Altered ☐ Moved ☐		
44 Description of Environment and Outbuildings This house is on a large tract for largely suburbanized neighborhood. A 3-stall barn is northwest of the house, and part of lot is fenced as a paddock.		34. Condition Interior Exterior good		35. Preservation Underway? Yes ☐ No ☒
		35. Endangered? By What? development		
45 Sources of Information St. Louis County Probate Court, #17261. St. Louis County Recorder of Deeds, Book 363, p. 121 & 122; 467, 428; 5100, 258; 7664, 535; Marriage Book 27, p. 616.		36. Visible from Public Road? Yes ☒ No ☐		37. Distance from and Frontage on Road
		37. Prepared by Esley Hamilton		
46. Organization St. Louis County Parks		48. Date 8/89		49. Revision Date(s)
		49. Revision Date(s)		

Schumm-Steiner House
2103 Kehrs Mill Road

43. continued

part of this lot was part of a forty-acre tract owned by Tiber Engler in the nineteenth century. His heirs sold it in 1915 to Mary Schumm, the wife of J.G.F. Schumm. She paid only \$600 but then borrowed \$1,400, so there is a good chance that she built this house at that time. The Schumms sold the property only five years later for \$3,000. The buyer was Leo Steiner, whose family had owned the 80 acres just north of the Englers since the 1870's. The Steiner house had been farther north of here on the east side of Kehrs Mill Road. The north side of this lot was part of the Steiner farm. Leo Steiner died in 1945, leaving his large farm in the Gumbo Bottom to his two elder sons and this property, which he called "the home place", to his youngest son Edward. The property was later acquired by Herman C. Dielmann and his wife, the former Laura Litzsinger; they had married in 1925. After Herman's death Laura sold the remaining property to the present owners. The property is currently for sale again.

239

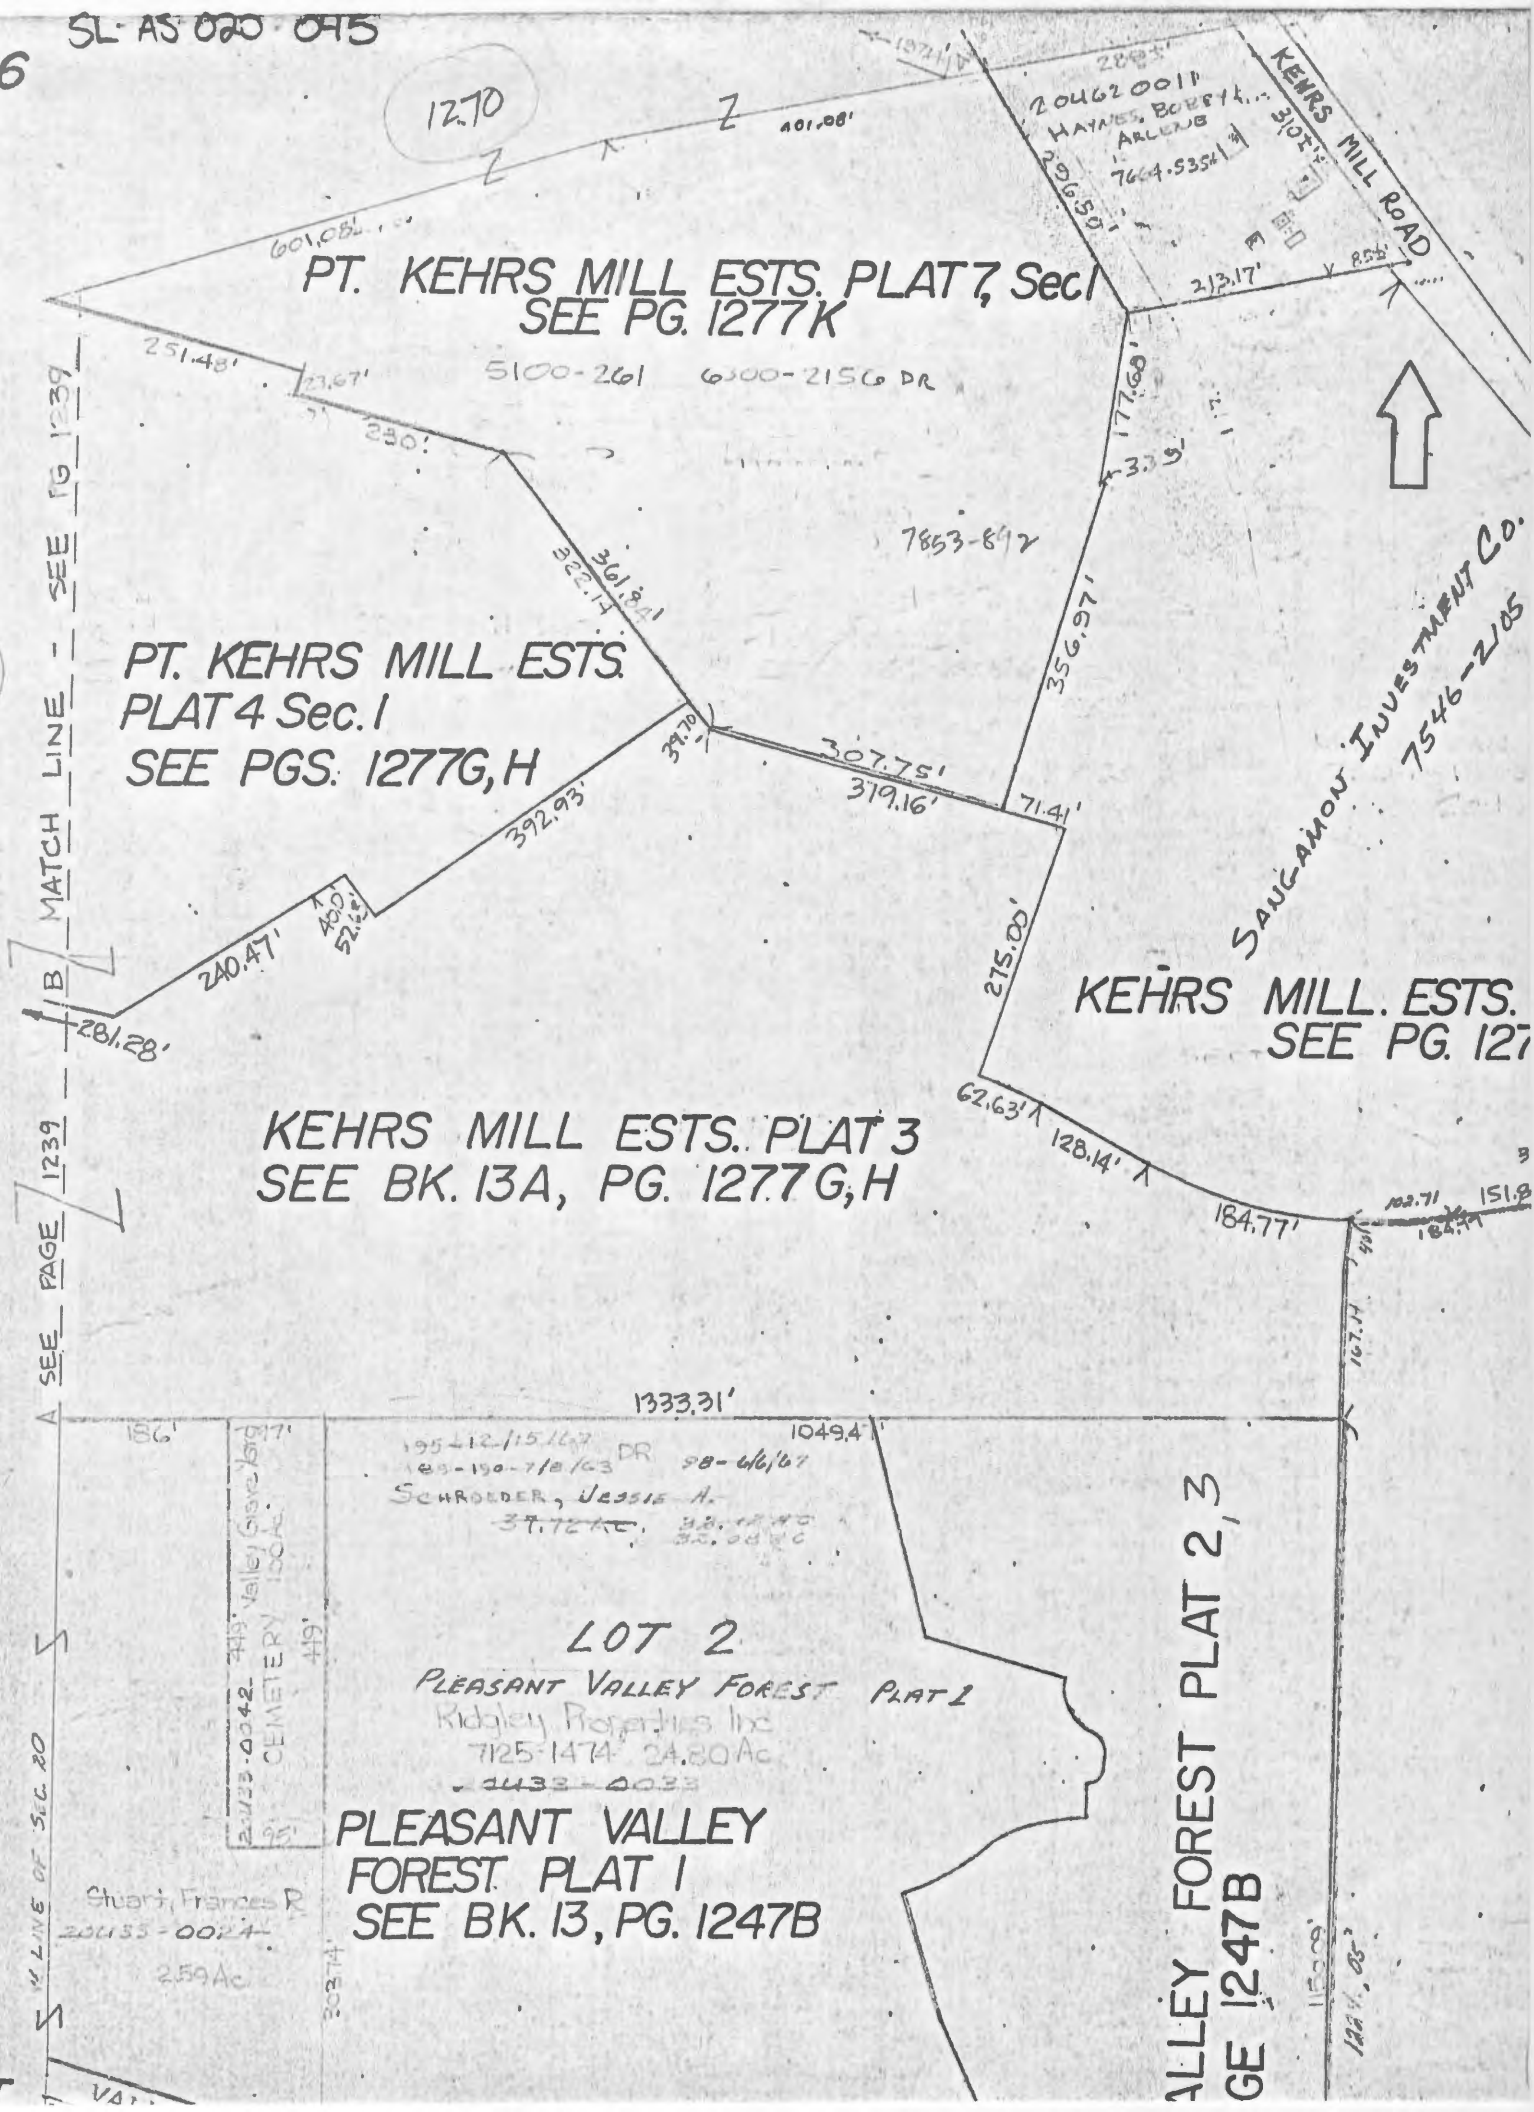



HISTORIC INVENTORY

1 No 20T130245		4 Present Name(s) Pfitzinger-Gardner House		1 NO
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 77119-35		2215 Kehrs Mill Road		
Specific Location 1.77 acres, Lot 201, Section 1, Kehrs Mill Estates, Plat 2		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period construction c. 1870 & c. 1925		
7 City or Town If Rural, Township & Vicinity Clarkson Valley		18. Style or Design vernacular 09		4 Present Name(s) Pfitzinger-Gardner House
8 Site Plan with North Arrow		19. Architect or Engineer		
		20. Contractor or Builder		63
		21. Original Use, if apparent residence 01A		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
9 Coordinates UTM Lat Long		24. Owner's Name & Address, if known HGS Design Ltd. 46 Rolling Rock Court St. Louis, Missouri 63124		5 Other Name(s) 2215 Kehrs Mill Road
10 Site ☐ Building ☒ Structure ☐ Object ☐		25. Open to Public? Yes ☐ No ☒		
11 On National Register? Yes ☐ No ☒		12 Is It Eligible? Yes ☐ No ☐		Photo
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		
15 Name of Established District		26. Local Contact Person or Organization		41. Distance from and Frontage on Road /321
		27. Other Surveys in Which Included		
42 Further Description of Important Features		The front door has a narrow toplight and is sheltered by an arched hood supported by two thin columns. Windows are two-over-two; most have plank shutters. Roofing is old-fashioned diamond-patterned squares. Two brick chimneys rise from near the center of the roof ridge. They are two different shapes. The rear wing has a projecting second story supported by plain stick brackets. Windows in this part are one-over-one.		43 History and Significance
44 Description of Environment and Outbuildings		This property has an attractive second structure southeast of the main house. It is one and one-half stories with a cross-gabled roof, six-over-six windows (some shuttered) and clapboard walls. The property seems more spacious than it is because much of the land surrounding has been subdivided as building lots.		46. Prepared by Esley Hamilton
45 Sources of Information		St. Louis County Probate Court, #413. St. Louis County Recorder of Deeds, Book 612, p. 576; 664, 262.		47. Organization St. Louis County Parks
		48. Date 8/89		49 Revision Date(s)

Pfitzinger-Gardner House
2215 Kehrs Mill Road

43. continued

Herbert Hausman, who was apparently no relation, and Hausman sued the remaining family members for partition. At a special sale, the farm was sold to A. E. L. Gardner for \$14,280. By that time the original house must have been fairly deteriorated, and the present appearance of the house seems to date from improvements Gardner made. The remaining farm was subdivided as Kehrs Mill Estates beginning in 1979.

PT. OF SEC. 20 T. 45 N. R. 4 E.


KEHRS

14.65 Ac.

1272

PLAT 7, Sec. 2
7H

A hand-drawn sketch of a road layout. The sketch shows a main road with a side road branching off. Dimensions are given in feet: 17.70, 35.51, and 105.81. A north arrow is present, pointing towards the top right. There are also some handwritten notes and a small diagram of a building or structure.



CINCO LAND DEVELOPERS, INC.
38.887 ALRES. 7178-2147

0925-8331 D.R.
CLARKSON VALLEY EST. INC. (L74)
120.73 AC 087.11/20/6

~~20U34-0016~~

KEHRS MILL ESTATES^{1277 F} PLAT 1 SECTION 3
SEE PAGE 1277 F

CINCO LAND DEVELOPERS INC.

27.82 ACRES

7178-2144

20T13-0081



HISTORIC INVENTORY

SL-AS-020-047

1 No		4. Present Name(s) Tyler House	
2 County St. Louis		5. Other Name(s) Eatherton House	
3 Location of Negatives St. Louis Co Park Dept.			
6 Specific Location On <u>Laury Lane</u> south of Wild Horse Creek Road		16. Thematic Category <u>030</u> <u>140</u>	
7 City or Town If Rural, Township & Vicinity Meramec Township		17 Date(s) or Period c. 1837	
8 Site Plan with North Arrow ↑ to Wild Horse Creek Road		18 Style or Design <u>21</u> <u>49</u> Federal/Tidewater Maryland	
		19 Architect or Engineer	
		20 Contractor or Builder	
		21. Original Use, if apparent residence	
		22 Present Use residence	
9 Coordinates UTM Lat Long		23 Ownership Public ☐ Private ☒	
10 Site ☐ Building ☒ Structure ☐ Object ☐		24. Owner's Name & Address, if known J. Cotton Cowherd Wild Horse Creek Road St. Louis MO 63011	
11. On National Register? Yes ☐ No ☒		25. Open to Public? Yes ☐ No ☒	
12. Is It Eligible? Yes ☒ No ☐		26. Local Contact Person or Organization	
13 Part of Estab Yes ☐ Hist Dist? No ☒		27. Other Surveys in Which Included 100 Historic Buildings, p. 37 Historic Sites Inventory, no. 697	
14. District Potent'l? Yes ☐ No ☒		28. No. of Stories <u>1 1/2</u>	
15 Name of Established District		29. Basement? Yes ☐ No ☒ full	
		30. Foundation Material coursed stone <u>40</u> <u>65</u>	
		31. Wall Construction frame <u>WU</u>	
		32. Roof Type & Material gable/composition <u>68</u> <u>50</u> <u>63</u>	
		33. No. of Bays Front <u>5</u> Side <u>3</u>	
		34. Wall Treatment clapboard <u>21</u>	
		35. Plan Shape <u>rectangle</u>	
		36. Changes (Explain in #42) Addition: <u>prcl</u> Altered: <u>0B</u> Moved: <u></u>	
		37. Condition Interior <u>20</u> <u>64</u> Exterior <u>excellent</u>	
		38. Preservation Underway? Yes ☐ No ☒	
		39. Endangered? By What? Yes ☐ No ☒	
		40. Visible from Public Road? Yes ☒ No ☐	
		41. Distance from and Frontage on Road	
42. Further Description of Important Features Fine detailing, along with the rarity of examples of Tidewater Maryland architecture in Missouri, give the Tyler House special significance. Trim used for the doors and windows on the front of the house has a fluted surface and the corner blocks have turned circles within them. Bulbous, turned pendants decorate the eaves.			
Photo			
43 History and Significance In December 1836, William Tyler purchased 126.80 acres from William and Permelia Bacon for \$300. According to Stevens (<u>St. Louis the Fourth City</u> , I, p. 996) he had come to St. Louis from Caroline County, Virginia. A headstone said to have been found in a now obliterated family graveyard was inscribed "Mary Tylor [sic] March 6, 1787—November 1, 1837". Perhaps she was his wife. He sold the tract to his brother Alexander L. Tyler in			
44 Description of Environment and Outbuildings The structure is situated well south of Wild Horse Creek Road. A one-lane, gravel road called Laury Lane provides access from the major thoroughfare. The barn which stood to the southeast of the house in 1965 has since been demolished.			
45 Sources of Information Atlases published by Hutawa (1847 and 1870), Pitzman (1862 and 1878), Johnson (1893) and Northwest Publishing Co. (1909) J. Thomas Scharf, <u>History of St. Louis and St. Louis County</u> (Philadelphia, 1883), p. 1928 St. Louis City Recorder, Book A ² , p. 189; Bk 214, p. 8; Bk 232, p. 441; Bk 311, p. 175		46. Prepared by John Lindenbusch	
		47. Organization St. Louis Co. Parks	
		48. Date 6/81	
		49. Revision Date(s)	

St. Louis

Tyler House

Other Name(s)
Eatherton House

Tyler House
Eatherton House

42. continued

Three gabled, narrow dormers at the front have four-over-four light windows. Asbestos shingles cover the sides of the dormers. The roof was apparently covered with similar material until the present composition shingles were applied.

Vertical-board doors are hung in each of the two front entries. They are sheltered by a gable-roof porch supported on four wooden columns which are squared at the top and the base and turned in between. A balustrade of horizontal 2 x 4s with diagonal 2 x 4s forming an X between has been added since 1970. The porch gable is weatherboarded and the space below the floor is enclosed by vertical slats.

Windows on the main floor have two-over-two lights with vertical muntins.

Three of the four original chimneys have been preserved. They are stone up to the top of the foundation of the house and brick above that line. The chimneys are quite broad at the base but battering at the level of the gable reduces their width at the top.

There is now a chimney set at each side of the roof ridge on the east. At the west side of the house, the chimney that was to the south, or rear, of the ridge has been removed. The clapboard used to fill the gap in the wall surface left when the chimney was demolished is readily distinguished from the adjacent wood. The date of the removal of the chimney has not been determined but it was prior to 1965.

Three windows on the first floor at the west of the house have two-over-two lights with vertical muntins. Two of those have fluted trim at the sides but the lintels are undecorated and there are no corner blocks. The trim of the third window--that to the rear of the house--is plain.

There are two windows in the western gable. One has four-over-four lights and is similar in size to the dormer windows. The other window in this gable is aluminum.

Two narrow, gabled dormers are present at the rear of the house. Both contain four-over-four light windows. The sides of these dormers are covered with asbestos shingles.

A modern, shed-roofed addition runs across the entire width of the rear of the house. The space at the west side of the addition has been enclosed with weatherboarding and the remainder forms an open porch. The foundation for the addition is concrete block. Corrugated metal is used as the roofing material. The north wall of the enclosed space has an aluminum, casement window.

It did not prove possible to examine the interior of the house but a person employed by the owner indicated during a telephone conversation that the description given by Kenneth Coombs in 1965 remains essentially accurate.

42. continued

He noted that there were originally two fireplaces in the basement, four fireplaces on the first floor, and two fireplaces on the second. All eight had been closed before he examined the interior. He found that much of the interior material was original. That included plaster on hand-split lath, walnut paneling at the stair, and a lock on a door in the hall.

43. continued

1858 and died in 1860 leaving eight grandchildren. In 1860 Alexander Tyler and his wife Mary borrowed \$3000 from Dr. Henry Wright of Warren County and apparently they were unable to make repayment, because Wright sold the tract to James R. Eatherton in 1865. Eatherton died in 1901, leaving 50 of his nearly 200 acres to his son James W., provided he keep open "my private road from my dwelling to Wild Horse Creek Rd." James W. Eatherton died June 9, 1912 leaving 7 minor children including James W. born that same day. The fact that Eatherton Road runs to the east of the house is appropriate to the long Eatherton family tenure of the property.

44. continued

The grounds to the south of the house are used for an apiary.



HISTORIC INVENTORY

1. Name		4. Present Name(s) McDaniel-Steffan House	
2. County St. Louis		5. Other Name(s)	
3. Location of Negatives St. Louis County Parks		120 Long Road	
6. Specific Location Part of Lot 4 of a subdivision of the W 1/2 of Survey 126, Township 45, Range 4		16. Thematic Category	
7. City or Town If Rural, Township & Vicinity Chesterfield, Gumbo vicinity		17. Date(s) or Period	
8. Site Plan with North Arrow		18. Style or Design vernacular 09	
		19. Architect or Engineer	
		20. Contractor or Builder	
		21. Original Use, if apparent residence 01A	
		22. Present Use residence	
		23. Ownership Public ☐ Private ☒	
		24. Owner's Name & Address, if known David J. Hunsaker, et al 12936 Topping Estates N. Dr.	
9. Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒	
10. Site: ☐ Building ☒ Structure: ☐ Object: ☐		26. Local Contact Person or Organization	
11. On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included	
12. Is It Eligible? Yes ☐ No ☐			
13. Part of Estab Hist Dist? Yes ☐ No ☒			
14. District Potent'l? Yes ☐ No ☐			
15. Name of Established District		28. No. of Stories 2 - 1	
		29. Basement? Yes ☒ No ☐	
		30. Foundation Material stone 40	
		31. Wall Construction frame WK	
		32. Roof Type & Material gable, comp GB SD	
		33. No. of Bays Front 3 Side 3	
		34. Wall Treatment clapboard 21	
		35. Plan Shape rectangular	
		36. Changes (Explain in #42) ☒ Addition ☒ Moved ☒	
		37. Condition Interior Exterior good	
		38. Preservation Underway? Yes ☐ No ☒	
		39. Endangered? By What? Yes ☐ No ☒	
		40. Visible from Public Road? Yes ☐ No ☒	
		41. Distance from and Frontage on Road /144 ft.	
42. Further Description of Important Features This simple house with 2-over-2 windows has apparently lost its original front porch, if it had one. It now has a curved hood supported by wrought-iron brackets. The 1-story rear wing was once an el but has been enlarged to cover the whole back of the house. The gable ends have returns.			
43. History and Significance This house has retained its physical integrity better than any other building in the crossroads settlement of Gumbo, which has recently been incorporated into the City of Chesterfield. Margaret Wetzel acquired 23.83 acres in 1881, including the whole southeast corner of Long Road and Chesterfield Airport Road. At that time Long Road was called Eatherton or Kehrs Mill Road, and Chesterfield Airport Road was Olive Street Road. She was apparently the mother of Henry Wetzel, who established a general store and			
44. Description of Environment and Outbuildings			
45. Sources of Information St. Louis County Recorder of Deeds, Bk. 15, p. 589; 31, 40; 80, 107; 80, 457; 120, 548; 149, 259. Watchman-Advocate, <u>History of St. Louis County</u> (1919), p. 48. continued		46. Prepared by E. Hamilton	
		47. Organization St. Louis County Parks	
		48. Date 8/88	
		49. Revision Date(s)	

1. No
2. County
St. Louis3. Present Name(s)
McDaniel-Steffan House5. Other Name(s)
120 Long Road

McDaniel-Steffan House
120 Long Road

43. continued

roadhouse on the corner and bought the corner two acres in 1886. He died in 1900, but his sons Henry and Andrew (A.J.) bought the store two years later and in 1906 started a hotel adjacent. In the meantime Margaret Wetzel (who lived until 1903) sold an acre just south of the store to Gustave McDaniel in 1895 for \$100. McDaniel must have built the house, because when he moved to Franklin County and sold this property, he received \$950. The buyer was Mary Puellmann, formerly Mary Weinrich, who had married Louis H. Puellmann in 1882. Three years later they sold the same property to John L. Steffan (not Steffen) for \$1,400. John and Mary were first cousins, both grandchildren of Peter Steffan who died in 1892. John was younger, having been a minor when his own father died in 1895. Their uncle Cosmos D. Kroening owned the hotel and warehouse across the street from Wetzel's store. John L. Steffan died in 1912 leaving his wife Annie, his mother, two brothers and a sister.

45. continued

Thomas, History of St. Louis County (1911), Vol. I, p. 388; Vol. II, p. 57.

SL-AS-020-048


from Atlas of St. Louis County (1909)

GUMBO

IN SURVEYS 1010 & 126, 45-4


MERAMEC TWP.

Scale 200 feet to one inch.

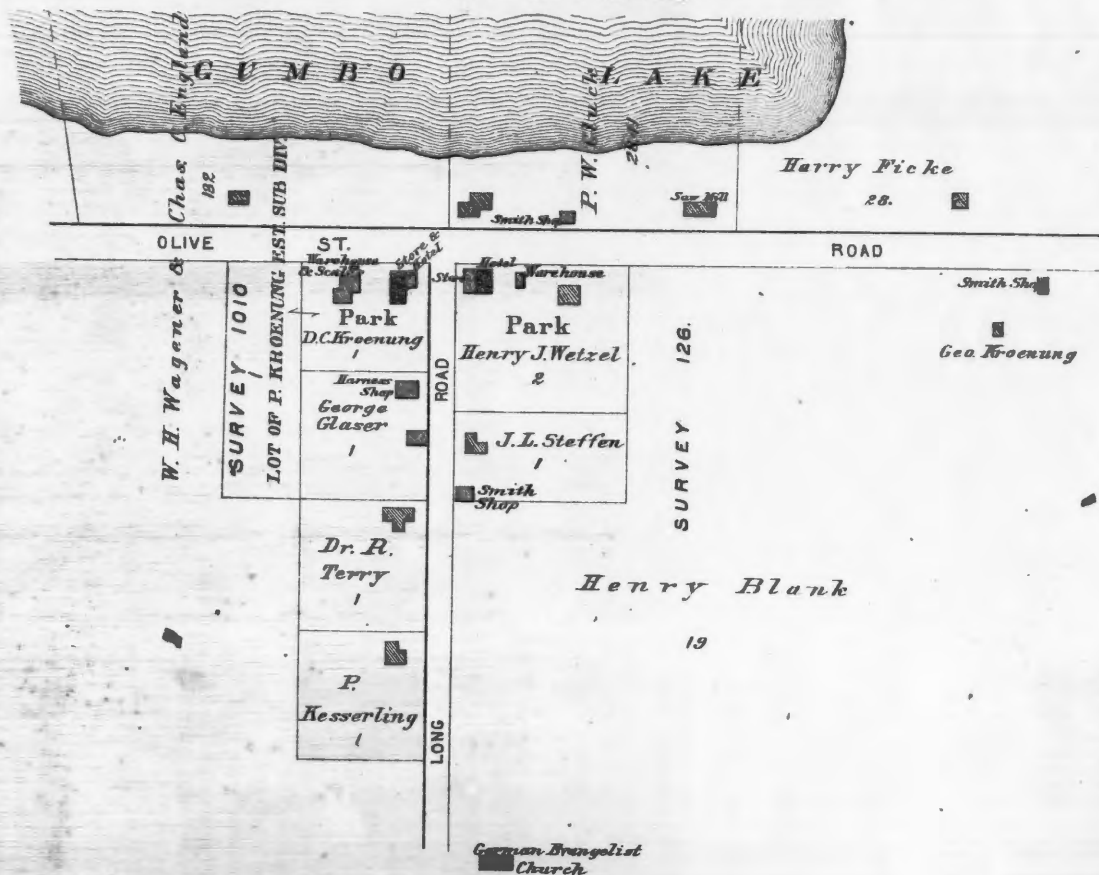

AIRPORT

~~HIGHWAY~~

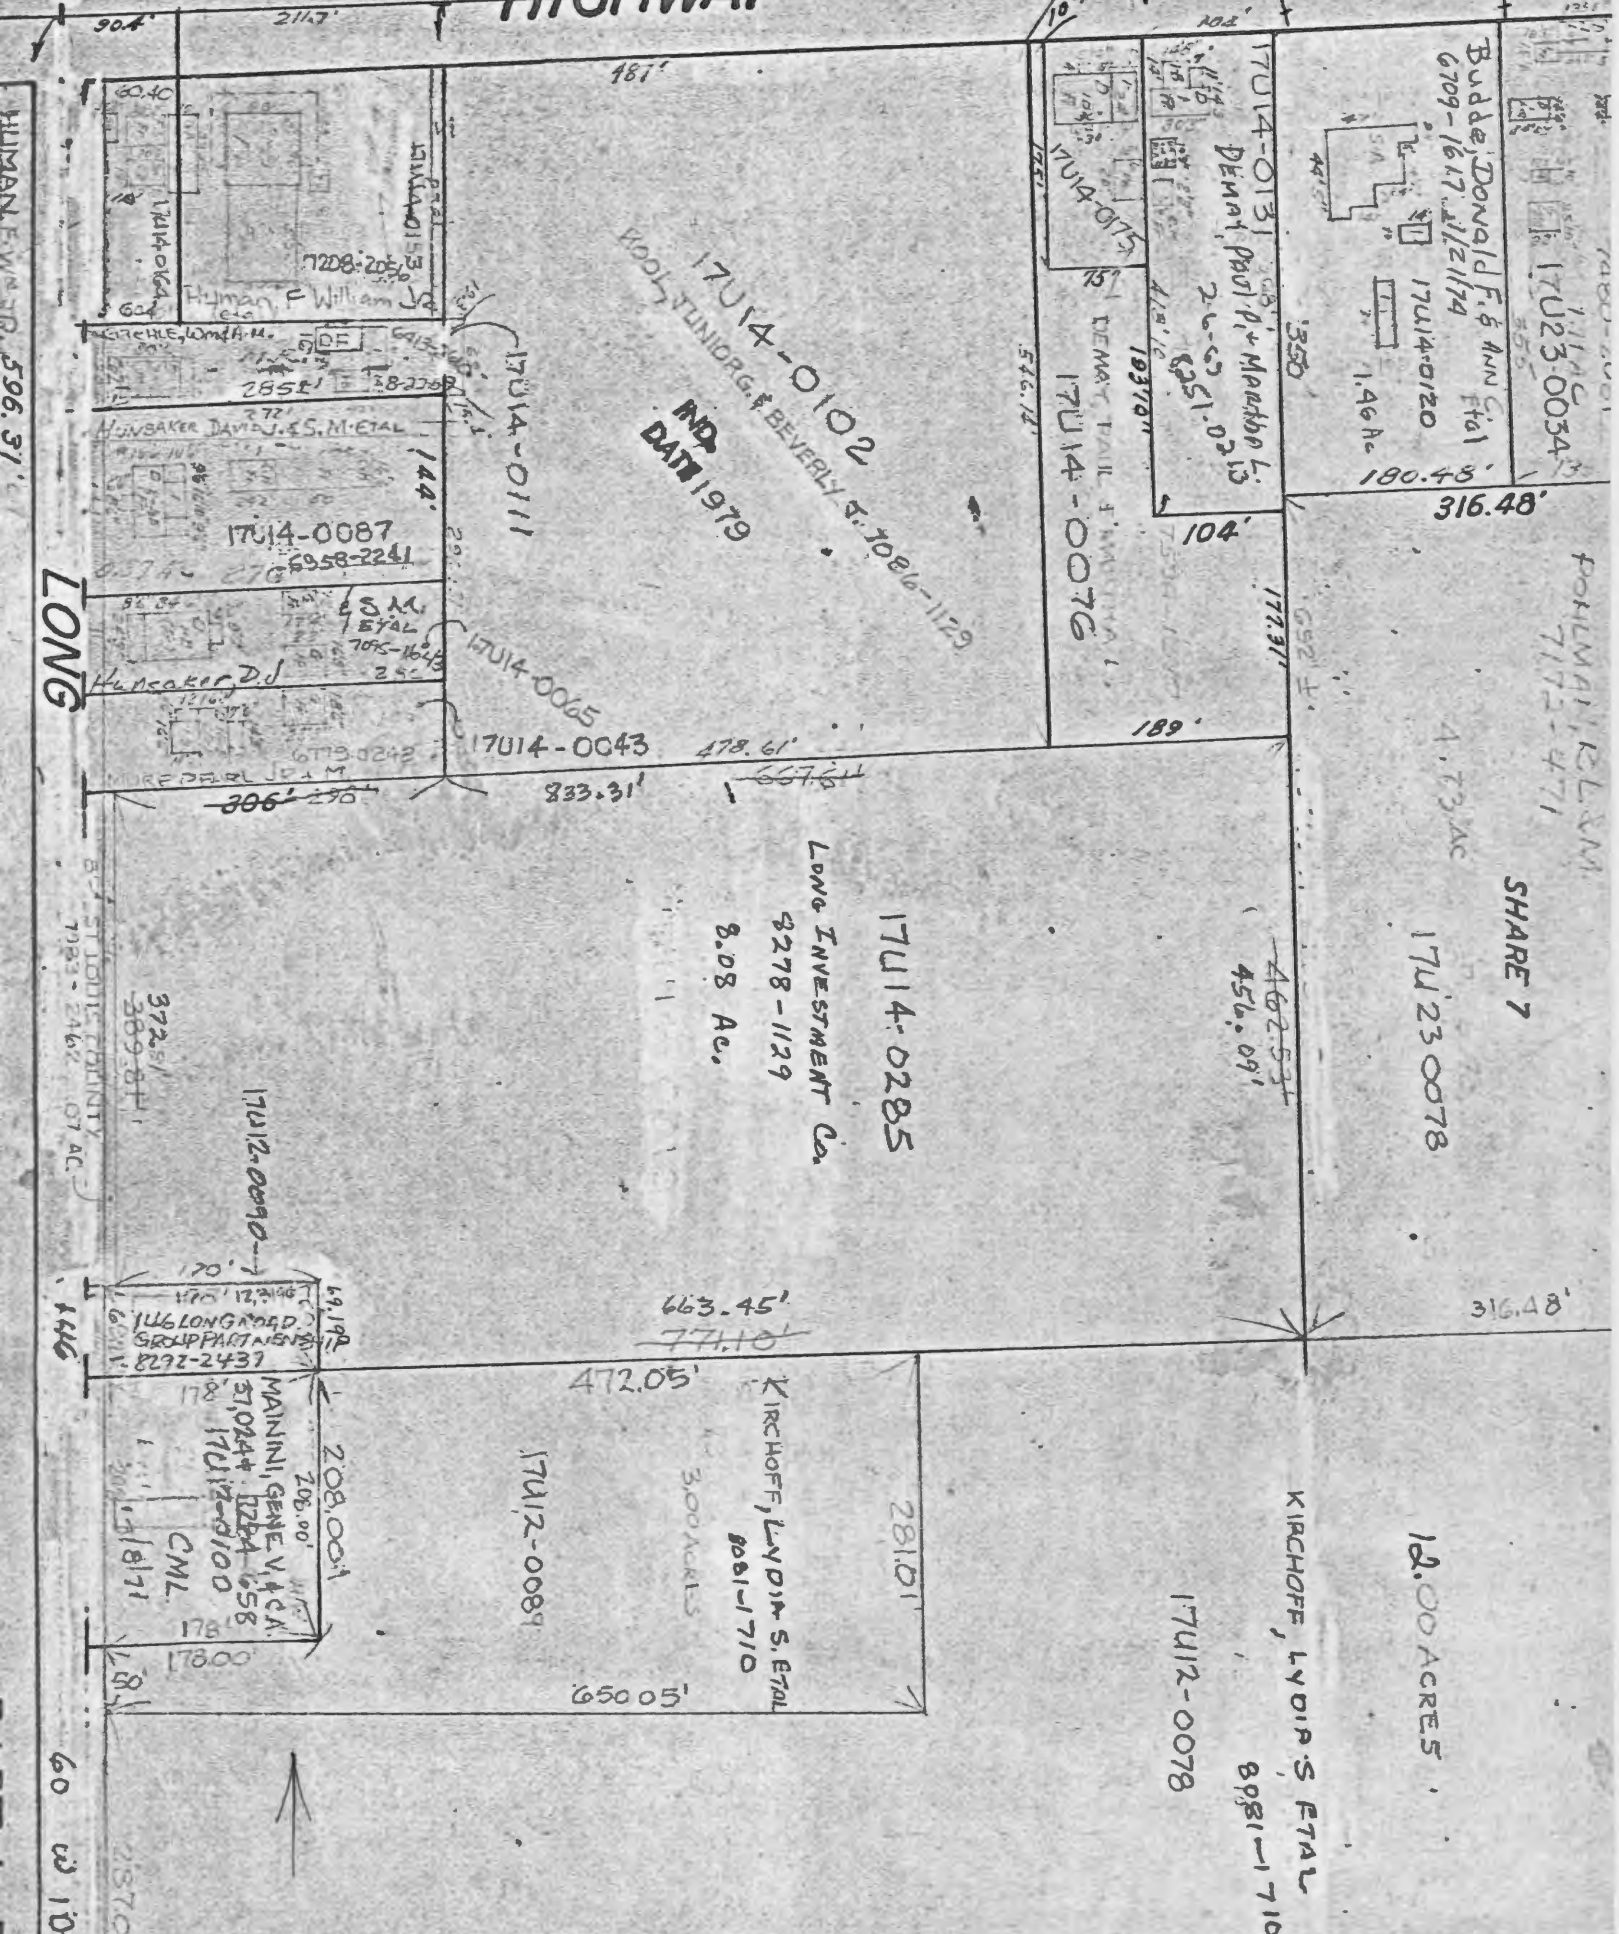~~100 W~~



HISTORIC INVENTORY

1 No 17U140054		4 Present Name(s) Dr. Robert Terry, Jr., House		1 No	
2 County St. Louis		5 Other Name(s) 0		2 County St. Louis	
3 Location of Negatives 34103-16		123 Long Road		4 Present Name(s) Dr. Robert Terry, Jr., House	
6 Specific Location .48 acre in lot 2 Dr. Kroenung Estate, 397.66 ft. south of Olive St. Rd.		16 Thematic Category		28 No. of Stories 2	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1902		29 Basement? Yes ☐ No ☒	
8 Site Plan with North Arrow		18 Style or Design Queen Anne 49		30 Foundation Material not evident	
		19 Architect or Engineer		31 Wall Construction frame WW	
		20 Contractor or Builder		32 Roof Type & Material 16 CB 63 cross gable, comp.	
		21 Original Use, if apparent residence OIA		33 No. of Bays Front irr.2 Side irr.3	
		22 Present Use residence		34 Wall Treatment 99 vertical siding	
		23 Ownership Public ☐ Private ☒		35 Plan Shape irregular	
		24 Owner's Name & Address, if known Larry Wilson, Jr., et al		36 Changes (Explain in #42) 0B Addition: ☒ Altered ☒ Moved ☐	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒		37 Condition Interior Exterior good	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization		38 Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		39 Endangered? By What? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☐				40 Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist.? Yes ☐ No ☒				41 Distance from and Frontage on Road /104'	
14 District Potent'l? Yes ☒ No ☐				5 Other Name(s) 123 Long Road	
15 Name of Established District					
42 Further Description of Important Features The Queen Anne shape of the house is still apparent, but details have been smoothed out by resurfacing with vertical wood siding with a treated but unpainted finish. The gabled wings have paired windows rising into the gables. The front wing also has first-floor corners cut away. The south wing has a three-part window on the first floor. Both center first-floor windows have areas of art glass at the top. The rear wing is lower and has a further addition behind it with a shed roof.					
43 History and Significance This side of Long Road was part of the estate of Damian Kroenung. His widow Fredericka sold one acre here in 1902 to Dr. Robert Terry, Jr., for \$225, and he probably built this house, which is indicated in the 1909 county atlas. The south half of the acre was later sold for the construction of 129 Long Road.					
44 Description of Environment and Outbuildings This location is the historic village of Gumbo. Long Road was also called Kehrs Mill Road.					
45 Sources of Information St. Louis County Recorder of Deeds, Book 129, p. 477.					
46 Prepared by E. Hamilton					
47 Organization St. Louis County Parks					
48 Date 8/89 49 Revision Date(s)					

PART 2 THIS BOOK

N.0°50'E

ROAD

60' W.

ADJ.
LOT

178.71'

104.7'

WILSON, LARRY JR. ETAL
2047-1277

17U14-0054

Ferguson, William & Carolyn A.
184-4415/16

17U14-0032

1 WEEKS, WILBERT
4.00 AC.
0.86 AC.
17U14-0021

208.10'

25'

780



HISTORIC INVENTORY

1 No 17U140065		4 Present Name(s) Elmer Walter House		1 No		
2 County St. Louis		5 Other Name(s)				
3 Location of Negatives 34103-18		124 Long Road				
6 Specific Location 1/2 acre in Survey 126, T45, R4		16. Thematic Category		2 County St. Louis		
		17 Date(s) or Period constructed c. 1922				
7 City or Town If Rural, Township & Vicinity Chesterfield		18. Style or Design bungalow 20		4 Present Name(s) Elmer Walter House		
8 Site Plan with North Arrow		19. Architect or Engineer				
9 Coordinates UTM Lat Long		20. Contractor or Builder		5 Other Name(s) 124 Long Road		
		21. Original Use, if apparent residence OIA				
		22 Present Use residence				
		23 Ownership Public ☐ Private ☒				
10 Site ☐ Building ☒ Structure ☐ Object ☐		24. Owner's Name & Address, if known David J. & Sandra M. Hunsaker, 12936 Topping Estn. St. Louis, MO 63131		63		
11. On National Register? Yes ☐ No ☒		25. Open to Public? Yes ☐ No ☒				
12. Is It Eligible? Yes ☐ No ☐		26. Local Contact Person or Organization		7		
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒		27. Other Surveys in Which Included				
14. District Potent'l? Yes ☐ No ☐		28. No. of Stories 1 1/2		8		
15 Name of Established District		29. Basement? Yes ☒ No ☐				
42. Further Description of Important Features Verandah in front has four large square posts with pedestals corresponding to the railing, which has square balusters. Windows are three-over-one, some paired on the sides. Above the glazed door is a low hip-roofed dormer with two square windows. A thick brick chimney is in back.		30. Foundation Material concrete 65		9		
		31. Wall Construction frame WK				
		32. Roof Type & Material HP hip roof, comp.				
		33. No. of Bays Front 3 Side 3				
43 History and Significance This lot was originally the north half of the one-acre lot on which 128 Long Road was built about 1908. It was sold as a separate parcel in 1922 by Frank Corless for \$200. The buyers, Elmer F. and Bessie E. Walter, were still living here in 1930, when they sold the front part of the lot to the highway department.		34. Wall Treatment 64 asbestos siding		10		
		35. Plan Shape rectangular				
		36. Changes (Explain in #42) DRK Addition: ☒ Moved: ☐				
		37. Condition Interior Exterior good				
44 Description of Environment and Outbuildings This location is the historic village of Gumbo. The address is listed in old county records as 68 Kehrs Mill Road.		38. Preservation Underway? Yes ☐ No ☒		11		
		39. Endangered? By What? Yes ☐ No ☒				
		40. Visible from Public Road? Yes ☒ No ☐				
		41. Distance from and Frontage on Road /76				
45 Sources of Information St. Louis County Recorder of Deeds, Book 540, p 148; 1204, 378.				12		
					46. Prepared by E. Hamilton	
					47. Organization St. Louis County Parks	
					48. Date 8/89 49. Revision Date(s)	

HIGHWAY

1616

178.00

650051

17412

OFF, LY

2



HISTORIC INVENTORY


1 No 17U140043		4 Present Name(s) Wetzel-Ahlers House		1 No St. Louis	
2 County St. Louis		5 Other Name(s)			
3 Location of Negatives 34103-20		128 Long Road			
6 Specific Location ½ acre in Survey 126, T45, R4		16 Thematic Category		2. County St. Louis	
7 City or Town II Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1908			
8 Site Plan with North Arrow		18 Style or Design vernacular 49			
9 Coordinates UTM Lat Long		19 Architect or Engineer		4 Present Name(s) Wetzel-Ahlers House	
10 Site I I Structure I I Building X X Object I I		20 Contractor or Builder			
11 On National Register? Yes I I No X X		21 Original Use, if apparent residence DIA			
12 Is II Eligible? Yes I I No I I		22 Present Use residence		5 Other Name(s) 128 Long Road	
13 Part of Estab Hist Dist.? Yes I I No X X		23 Ownership Public I I Private X X			
14 District Potent'ly? Yes I I No I I		24 Owner's Name & Address, if known Pearl Mure, Jr.			
15 Name of Established District		25 Open to Public? Yes I I No X X		Photo	
42 Further Description of Important Features This house has been resurfaced with modern treated (but unpainted) wood siding. The rear lean-to addition seems to be much earlier. Windows are one-over-one. The entrance porch in the northwest angle of the house is partly enclosed. It has a hip roof, clapboard parapet, and plain wood corner posts.		26 Local Contact Person or Organization			
43 History and Significance Albert J. Wetzel bought a one-acre lot here in 1908 from Henry Blank. Wetzel was born in Gumbo in 1886 and became a partner of his brother Henry in the Wetzel Mercantile Co. of Gumbo the same year he bought this lot. He probably built the house with the \$900 he borrowed. In 1910 he married and moved to Pond, but he kept this property until 1918. It was then purchased by Wilhelmina, the wife of Henry Ahlers. (continued)		27 Other Surveys in Which Included			
44 Description of Environment and Outbuildings This location is the historic village of Gumbo. Long Road was also called Kehrs Mill Road.		28 No. of Stories 1½ - 1		48. Date 8/89	
45 Sources of Information St. Louis County Recorder of Deeds, Book 218, pp. 351 & 352; 409, 461; 455, 273; 463, 482; 540, 148. Watchman Advocate, History of St. Louis County (1918), p. 48.		29 Basement? Yes X X No			49 Revision Date(s)
		30 Foundation Material stone 40			
		31 Wall Construction frame WK			
		32 Roof Type & Material cross gable, comp. 1650			
		33 No. of Bays Front irr.2 Side irr.3			
		34 Wall Treatment clapboard 21			
		35 Plan Shape irregular			
		36 Changes (Explain in #42) Addition: X X Altered: X X Moved: X X			
		37 Condition Interior Exterior good			
		38 Preservation Underway? Yes No X X			
		39 Endangered? By What? Yes I I No X X			
		40 Visible from Public Road? Yes X X No			
		41 Distance from and Frontage on Road 176			
		46. Prepared by E. Hamilton			
		47. Organization St. Louis County Parks			

Wetzel-Ahlers House
128 Long Road

43. continued

The next year she sold it to Ivory L. and Beddie M. Walter. The next year, they sold the acre to Frank Corless for \$1,400. He was one of a large family prominent in the Bottoms. In 1922, he sold the north half of this lot to Elmer F. and Bessie E. Walter, and it was probably they who built the bungalow that is now 124 Long Road.

HIGHWAY

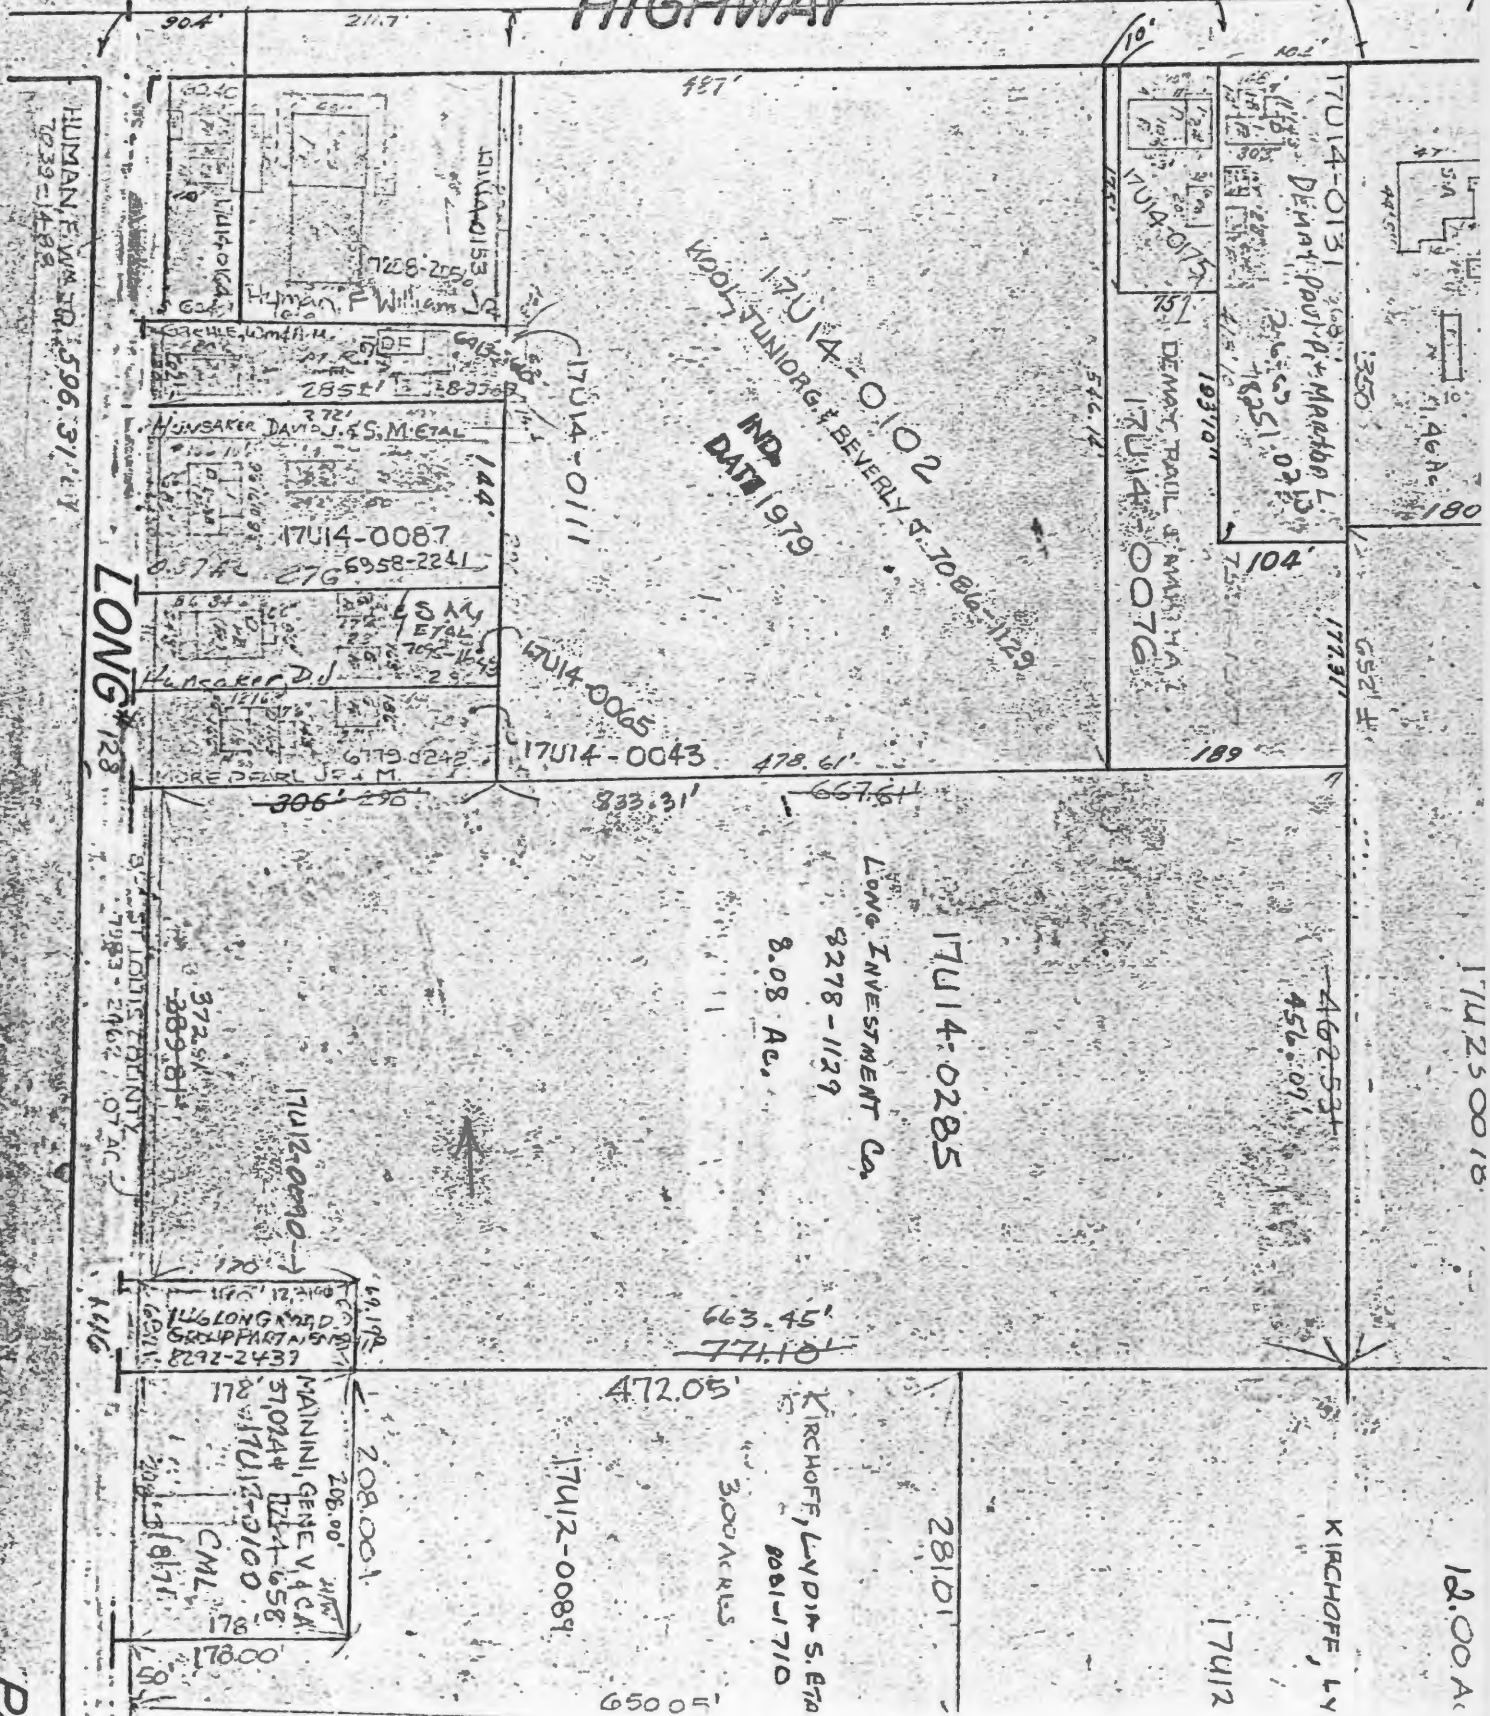



SL-AS-020-052

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 17U140032 2 County St. Louis 3 Location of Negatives 34103-15	4 Present Name(s) Second Dr. Robert Terry House 5 Other Name(s) 129 Long Road	1 No 2 County 3 4 Present Name(s) 5 Other Name(s)	
6 Specific Location .43 acre in Lot 2, D. Kroenung Partition in Survey 1010, 522.08 South of Olive 7 City or Town If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16 Thematic Category 17 Date(s) or Period constructed 1925 18 Style or Design bungalow 19 Architect or Engineer 20 Contractor or Builder 21 Original Use, if apparent residence 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known William Ferguson, Jr. 25 Open to Public? Yes ☐ No ☒ 26 Local Contact Person or Organization 27 Other Surveys in Which Included	28 No. of Stories 1 1/2 29 Basement? Yes ☒ No ☐ 30 Foundation Material concrete 31 Wall Construction frame 32 Roof Type & Material gable, comp 33 No. of Bays Front 4 Side 4 34 Wall Treatment asbestos siding 35 Plan Shape irregular 36 Changes (Explain in #42) Addition ☐ Alteration ☒ Moved ☐ 37 Condition Interior Exterior good 38 Preservation Underway? Yes ☐ No ☒ 39 Endangered? By What? Yes ☐ No ☒ 40 Visible from Public Road? Yes ☒ No ☐ 41 Distance from and Frontage on Road /104	1 No 2 County 3 4 Present Name(s) 5 Other Name(s)
9 Coordinates UTM Lat Long 10 Site Building ☒ Structure Object ☐ 11 On National Register? Yes ☐ No ☒ 12 Is Eligible? Yes ☐ No ☐ 13 Part of Estab Hist Dist? Yes ☐ No ☒ 14 District Potent? Yes ☒ No ☐ 15 Name of Established District	42 Further Description of Important Features This is the best-maintained house in this grouping along Long Road. It has two front doors opening onto a front verandah with square posts, a railing supported by diagonal planks. The wood floor has latticework underneath. Windows are three-over-one. The rear wing has a cross gable, and a further addition at the back has a shed roof. A front gabled dormer has a shuttered window.		1 No 2 County 3 4 Present Name(s) 5 Other Name(s)
43 History and Significance Dr. Robert Terry, Junior, who built the house at 123 Long Road, immediately north of this one, sold that property to Charles E. and Elizabeth A. Kelp in 1925. Kelp was a contractor, and he helped Dr. Terry build this house on what had been the side yard of property he acquired in 1902. The right front room was the doctor's office, and it had a medical cabinet in it as late as the 1960s. The story was			1 No 2 County 3 4 Present Name(s) 5 Other Name(s)
44 Description of Environment and Outbuildings This location is the historic village of Gumbo. Long Road was also called Kehrs Mill Road.			1 No 2 County 3 4 Present Name(s) 5 Other Name(s)
45 Sources of Information William Ferguson, Jr. St. Louis County Recorder of Deeds, Book 129, page 477; 688, 52 & 53, 1543, 191; 1574, 586; 1558, 578			1 No 2 County 3 4 Present Name(s) 5 Other Name(s)
46 Prepared by E. Hamilton 47 Organization St. Louis County Parks 48 Date 8/89 49 Revision Date(s)			1 No 2 County 3 4 Present Name(s) 5 Other Name(s)

Second Dr. Robert Terry House
129 Long Road

43. continued


that the doctor got the money for the new house by winning on the "weather tickets," a form of gambling. Dr. Terry died in 1934, leaving no will, and in 1938 his widow Rosa and children George, Elmer, Clyde, William Davey, and Louise C. Macalady sued each other over the estate. This property was then sold to Erwin and Irma Kroenung for \$2050. Erwin Kroenung later recalled that the horse weeds were up to the gutters because of the neglect resulting from the feuding.

PART 2 THIS BOOK

N.0°50'E

ROAD

ADJ.
LOT

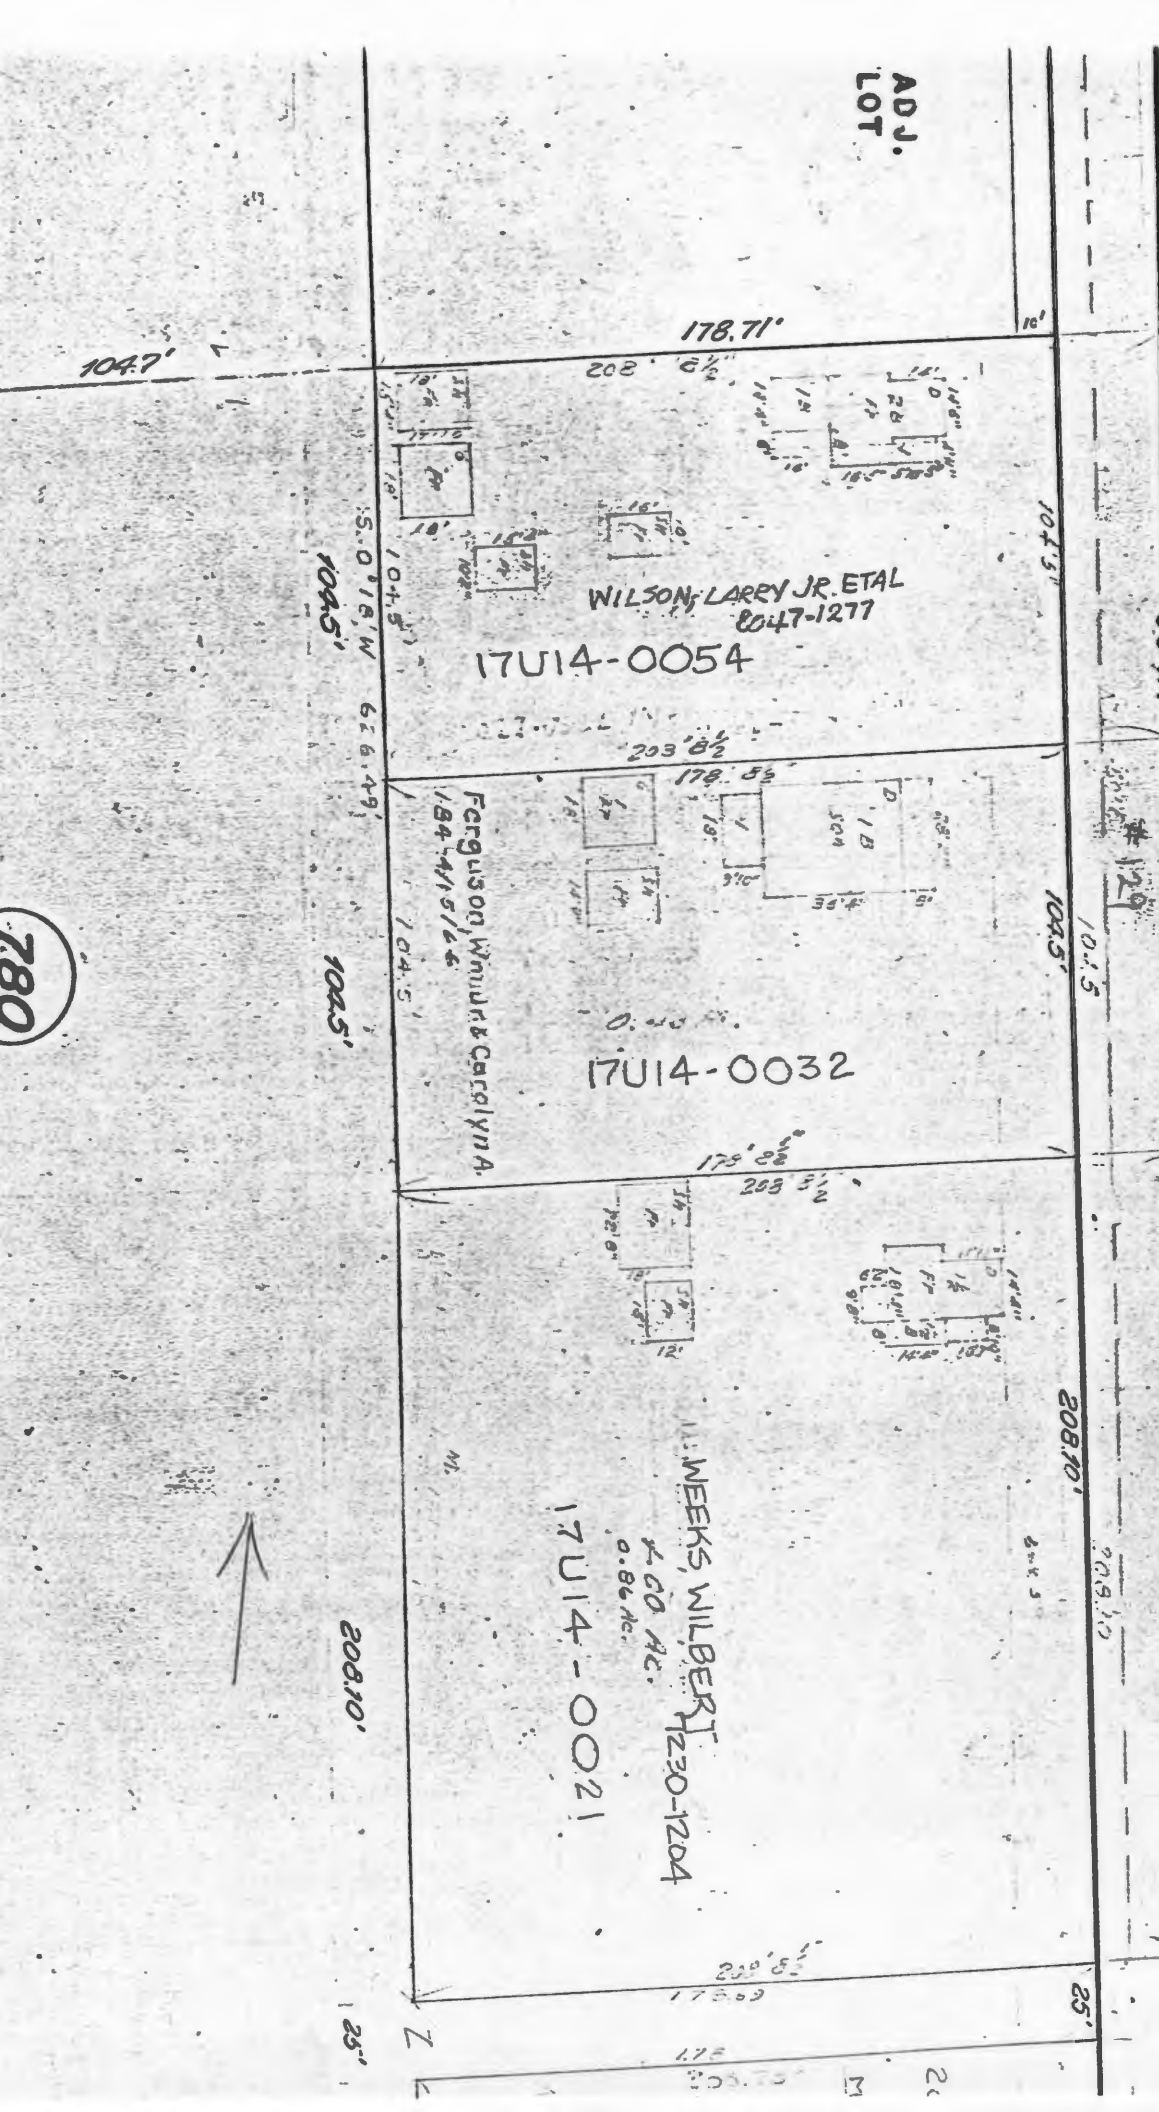

780



HISTORIC INVENTORY

1 No 17U140021		4 Present Name(s) Peter Kesselring House		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34103-11		135 Long Road		
6 Specific Location .86 acre in Lot 2, D. Kroenung Partition in Survey 1010, 606.49 ft. South of Olive		16 Thematic Category		2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1906		
8 Site Plan with North Arrow		18 Style or Design Vernacular 49		
		19 Architect or Engineer		4 Present Name(s) Peter Kesselring House
		20 Contractor or Builder		
		21 Original Use, if apparent residence OIA		
		22 Present Use residence		5 Other Name(s) 135 Long Road
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Owen R. Weeks, et al 12415 Dawn Hill Drive Maryland Heights, MO 63043		
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒		Photo
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization		
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		
12 Is It Eligible? Yes ☐ No ☐				
13 Part of Estab Hist Dist? Yes ☐ No ☒		14 District Potent? Yes ☐ No ☐		
15 Name of Established District				
42 Further Description of Important Features The main roof is an older type of roofing material with large shingles. The porch roof and south wing have modern asphalt shingles. The tiny older house is basically L-shaped, with two-over-two windows in the gable ends. The entry is via a shed-roof porch which has been partly enclosed. The south wing has sliding windows ornamented with false shutters. A further addition is at the rear.				
43 History and Significance This side of Long Road was part of the estate of Damian Kroening. His widow Fredericka sold one acre in 1906 to Peter Kesselring for \$225, and he probably built this house, which is indicated in the 1909 county atlas.				
44 Description of Environment and Outbuildings This location is the historic village of Gumbo. Long Road was also called Kehrs Mill Road, and this house had the address Route 1, Box 50.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 171, p. 475.				
46 Prepared by E. Hamilton				
47 Organization St. Louis County Parks				
48 Date 8/89 49 Revision Date(s)				

PART 2 THIS BOOK

N.0°50'E

0.11

ROAD

#135

104.5'

208.10'

25'

100'

50°15'W 1,204'

17U14-0054

17U14-0032

17U14-0021

17U12-0045

Ferguson, William & Carolyn A.
184-4/17/64

WEEKS, WILBERT
460 AC. 1230-1204
0.86 AC.

MARLEY, SHIRLEY ANN
6782-2244

20,800 ft

780

780





Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY SL-AS-020-054

1 No 17U120045		4 Present Name(s) John Corless House		1 No	
2 County St. Louis County		5. Other Name(s)			2 County St. Louis
3 Location of Negatives 34103-24		143 Long Road			
6 Specific Location part of Lot 2, D. Kroenung Partion in Survey 1010, 631.50 ft. south of Olive		16. Thematic Category		4 Present Name(s) John Corless House	
		17 Date(s) or Period constructed c. 1915			
7 City or Town If Rural, Township & Vicinity Chesterfield		18. Style or Design vernacular 49		5 Other Name(s) 143 Long Road	
8 Site Plan with North Arrow		19. Architect or Engineer			
		20. Contractor or Builder			
9 Coordinates UTM Lat Long		21. Original Use, if apparent residence OIA		63	
		22 Present Use residence			
0 Site : : Structure : : Building X Object : :		23 Ownership Public : : Private X		63	
		24. Owner's Name & Address, if known Shirley Ann Marley			
1 On National Register? Yes : : No X		25. Open to Public? Yes : : No X		63	
		26. Local Contact Person or Organization			
3 Part of Estab Hist Dist? Yes : : No X		27 Other Surveys in Which Included		63	
15 Name of Established District		28. No. of Stories 1		63	
		29. Basement? Yes X No : :			
		30. Foundation Material concrete 65		63	
		31. Wall Construction frame wu			
		32. Roof Type & Material 16 cross gable, asphalt		63	
		33. No. of Bays Front 3 Side irr. 3			
		34. Wall Treatment asbestos siding 64		63	
		35. Plan Shape irregular			
		36. Changes (Explain in #42) Addn X CB Altered X Moved : :		63	
		37. Condition Interior Exterior poor			
		38. Preservation Underway? Yes : : No : :		63	
		39. Endangered? By What? Yes X No : : deterioration			
		40. Visible from Public Road? Yes X No : :		63	
		41. Distance from and Frontage on Road /100 ft.			
42 Further Description of Important Features The shed roof front porch of this house has turned posts, plain balusters, and a wooden deck. Windows are mostly one-over-one. The rear wing, which may once have been a porch, has a row of four six-over-six windows. This section of the rear has a roof of lower angle. Photo					
43 History and Significance This lot was part of the larger tract inherited from her husband by Fredericka Kroenung. She gradually sold off lots on the west side of Long Road, resulting in the houses there now. She sold this lot in 1915 to John S. and Frances A. Corless. The Corless family was long established in the Gumbo Bottom area.					
44 Description of Environment and Outbuildings					
45 Sources of Information St. Louis County Recorder of Deeds, Book 357, p. 459.					
46. Prepared by E. Hamilton					
47. Organization St. Louis County Parks					
48. Date 8/89 49 Revision Date(s)					

N. 0° 50' E.

50' W.

ROAD

* 143

103.5'

208.10'

25.

100'

50° 18' W. 1,304

17U14-0054

17U14-0032

17U14-0021

WEEKS, WILBERT
7230-1204

17U12-0045

Marley, Shirley Ann

6782.224a

780

082





SL-AS-020-033

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 18U430037 2 County St. Louis 3 Location of Negatives 34103-0	4 Present Name(s) Gumbo Cemetery 5 Other Name(s) St. Thomas Cemetery, Long Road	1 No	
6 Specific Location 2.75 acres in Survey 1010, T45 R4 on Long Road 110 ft. south of Railroad 7 City or Town ☐ If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16 Thematic Category 17 Date(s) or Period founded c. 1850 18 Style or Design 19 Architect or Engineer 20 Contractor or Builder 21 Original Use, if apparent cemetery - 07B 22 Present Use cemetery 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known Gumbo Cemetery 25 Open to Yes ☒ Public? No ☐ 26 Local Contact Person or Organization St. Thomas Church UCC 532-3556 27 Other Surveys in Which Included	28 No. of Stories 29 Basement? Yes ☐ No ☐ 30 Foundation Material 31 Wall Construction NA 32 Roof Type & Material 33 No. of Bays Front Side 34 Wall Treatment 35 Plan Shape 36 Changes Addition ☐ (Explain in #42) Altered ☐ Moved ☐ 37 Condition Interior Exterior good 38 Preservation Yes ☐ Underway? No ☒ 39 Endangered? Yes ☐ By What? No ☒ 40 Visible from Yes ☒ Public Road? No ☐ 41 Distance from and Frontage on Road	2 County St. Louis
9 Coordinates UTM Lat Long 10 Site ☒ Structure ☐ Building ☐ Object ☐ 11 On National Register? Yes ☐ No ☒ 12 Is It Eligible? Yes ☐ No ☐ 13 Part of Estab Hist Dist? Yes ☐ No ☒ 14 District Potent'l? Yes ☐ No ☒ 15 Name of Established District	42 Further Description of Important Features The cemetery occupies a gently sloping hillside on the west side of Long Road. It is well maintained and orderly, with most stones in good condition and placed in neat rows. Many plots have footstones. Monuments are of varying ages, but with a substantial number of 20th-century granite stones.	4 Present Name(s) Gumbo Cemetery	
43 History and Significance Many people have assumed that this cemetery was the property of St. Thomas Evangelical Church, which was formerly located nearby at 150 Long Road. Now St. Thomas United Church of Christ and located at 17842 Wild Horse Creek Road, the church has for the last quarter century maintained the cemetery, and recently members were instrumental in forming a cemetery association. In actuality, however, the cemetery is much older than the church, which was founded in 1907. The oldest surviving stones (cont'd) 44 Description of Environment and Outbuildings	5 Other Name(s) St. Thomas Cemetery, Long Road		
45 Sources of Information St. Louis Genealogical Society, Old Cemeteries, St. Louis County, Missouri Volume I (1982), pp. 215-216. St. Thomas Church	46 Prepared by Esley Hamilton 47 Organization St. Louis County Parks 48 Date 9/89 49 Revision Date(s)		

Gumbo Cemetery
St. Thomas Cemetery, Long Road

43. continued

in the cemetery record the deaths of Margareta Becker in 1851 and Nickolaus Reigert in 1852. The unnamed wife of B. Kroenung died in 1859. The cemetery was located on part of the large tract of land in Survey 1010 purchased by Damian Kroenung before 1862, and it is likely that this cemetery began as a burial place for his family and neighbors, before Long Road itself was laid out. Kroenung, born in 1818, died in 1881, but his estate was not partitioned until some years later. The 1909 county atlas shows the cemetery for the first time; by then a great many burials had been made there.

St. Louis Genealogical Society, Old Cemeteries, St. Louis County, Missouri
Volume I (1982), pp. 215-216

ST. THOMAS UCC CEMETERY, Gumbo, Mo. Virginia L. Guinther and daughter Ellen

West side of Long Road between old Hwy 40 and Wild Horse Creek Road. Old St. Thomas Church is across the road and north of the cemetery.

- ALBRECHT, Caroline E. 11/14/1896-6/4/1930
Ernst T. 2/20/1869 - 4/2/1930
G. Samuel 1/23/1817 - 11/3/1888, ss
Elizabeth 2/23/1827 - 8/17/1888, ss
- ACKERMANN, Friederich Wm. s/I.W. 1873
- ANDRAE, Frederica C. 12/4/1836 - 3/27/1892
Julia Cornelia d 9/5/1868 as 7y
d/F. & F.C.
Frederick 4/16/1835 - 1/10/1889
Hattie 7/23-9/29/1881 d/F & F.C.
- BATES, Alvina W. 1882 - 1927
John L. 1876 - 1963
- BAUGH, Eliza Ann 1857-1918 w/L.S.
- BAYER, Gottlieb 7/24/1850 - 12/31/1922
Elsie 9/6/1899 - 12/24/1910
Josephine 1864-1907 w/Gottlieb
Amelia C. 1892-1902 d/Gottl. & Jos.
Ralph 6/21/1900-1/11/1906 s/T.T. & Mary
Josephine 1853-1930 w/Ernst
Ernst 1848 - 1916
Hellana A. 6/20/1885-11/24/1902
Olive Mae nee Woods 1888-1930
- BECKER, Henry 1/3/1850 - 5/23/1905
Emily 10/7/1855-4/23/1890
Lemuel G. 1880-1887
Edward 3/5/1812-8/10/1891 Father, ss
Margareta 7/15/1814-1/9/1851
Caroline d 7/20/1887 as 70y w/Edward
Cor--? (child's stone, illegible)
- BOISSELIER, Charles D. 1875-1928, Masonic emblem
Anna M. 1878 - 1969, ss
Thomas M. 1884-1911
Charles L. 12/13/1845-11/9/1907 F.
Amelia Apr 1854-7/27/1920 M.
Charlotte J. 6/16/1879-5/18/1917
Othelia 1871-1876 d/Chas & Amelia
- BUCK, August 12/13/1857 - 2/24/1917
Frances T. 2/17/1861 - 8/9/1938
- BURKHARDT, Christian 9/10/1840-3/14/1898, ss
Johanna 9/3/1843-3/19/1908 w/Christ.
Caroline 12/3/1866-6/23/1926
Inf/G & C b-d 1894
Marvin 1903-1904 s/G & C
Charlie June 1879-Aug 1881 s/C&J
- CALVERT, Cecil 12/22/1912-1/4/1913
Cecelia b-d 12/26/1914
- COULTER, Robert d 5/18/1914 as 76y
Margaret d 9/5/1926 as 90y
Wm. A. 2/1/1869 - 4/28/1899
- DAUGHERTY, Mary E. 4/20/1884-10/3/1898
- DIEKMANN, Agnes 2/1/1852-7/27/1879, ss
Friedrich 1878-1879
- DINKEL, Barbara 2/2/1818 - 4/4/1908
- DUNGES, Augusta 9/15/1838-7/25/1867 w/Ludwig
- EBERWEIN, Marion 8/9/1917 - 1/19/1924
- ESSEN, Elise 1/24/1856 - 8/16/1920
Rudolph G. 3/30/1856 - 5/13/1934
Lillie Terry 10/7/1887 - May 1925
- FICKE, Mattie 2/8/1868-8/1/1872 *
George A. 3/10-10/17/1865 *
*c/Herman & Mollie
Herman 7/26/1823-7/21/1907, ss
Mollie 10/11/1840-1/27/1890, ss
Merle Alberta 1/24/1904-4/19/1909*
Inf d 12/24/1903-1/3/1904 *
c/H & O
Mary Isabella 6/20/1866 - 2/4/1890
- GEGENBAUR, Sophia 2/26/1823-3/25/1882
b/Tuebingen Ger.
- GEGENBAUER, Johan 5/1/1819-1/18/1902
b Wurtemberg Ger.
Eugene 1847 - 1916
Isabelle 3/28/1853-11/18/1935
Clara I. 3/29/1884-3/17/1889
Bertha 8/27/1876 - 3/29/1911
Abe C. 9/20/1926 in 34th y.
- GLUCK, Virginia b-d 1918 d/Dorian & Laverne
Wilhelmina L. 3/22/1868-1/24/1917
- GLASER, W. Emma 1869 - 1925
- GIMBEL, George W. 1867 - 1917
- HOEHNE, Marvin G. 8/24/1921 - 4/22/1925
- HOEKSTRA, Bente 1863 - 1924
- HEIMANN, Robert 3/7/1858 - 1/29/1914
August 7/22/1860-5/21/1910 h/Minnie
Walter b-d 1900 s/Minnie
Rudolph Joseph 2/20/1893-1918
- HOHMANN, Anna C. 9/23/1864-4/1/1911, ss
H. Otto 1/4/1854-1/3/1936, ss
- JANSSEN, Charlotte d 2/14/1877 Mother, ss
Edward 1/30/1837-4/16/1876 F., ss
- JONES, Harrison b 1/14/1842 (stone buried)
father of Adelia Essen
- JABIN, Fred L. 5/10/1848 - 1/15/1921
- JENKINS, Mansel M. 1861 - 1929
- KALTENBERG, Fred A. Co F 12th Mo Inf
- KESSELRING, Henry b-d 1891 s/Henry
Leonard and Walter, no dates
- KESSLER, Katherine 10/4/1852-4/19/1885 w/Leon.
Oto G. 12/18/1873-4/10/1881 *
Emil E. 8/27/1877-Feb 1881 *
* c/Leonard & Catherine
- KOEWING, Edward 4/7/1884 - 7/7/1913
- KONNEMAN, John F. 3/7/1847-2/13/1905, ss
Hannah C. 4/3/1847-4/9/1908, ss
Charlotte W. 1883-1923 Mother
- KRAM, Anna Maria 2/26/1825-4/15/1881
Maria E. d/H & C 1881-1882
- KRAUS, Beulah 1887-1888 d/G & K
Amelia 1/31/-7/2/1886 d/Jos & Lee
- KROENUNG, Friederick 9/8/1840-7/20/1930
"Mother" should be Friedericke
Damian 9/27/1818-5/5/1881 Father
Anna 9/3/1862-2/7/1881 *
Louise 3/22/1871-1881 *
Infant b-d 1881 *
* c/D & E
Friedrich Wm b-d 1896 s/Wm & H.
William J. 12/17/1872-12/11/1925
Ernest d 1873 as 22y
Joseph 1881 - 1930
Barbara 1850 - 1927
Ernst 1840 - 1894
Jeanne Amelia 1920-1921
Arline Rose 1909-1914 d/Geo & E.
Harold G. 3/10-10/7/1900
wife of B. died 1859
- KUHLMANN, Amelia 2/6/1880 - 6/10/1900
Anna W. d/F.W. (old broken stone)
Friedrich Wm d 1873 as 6m s/FW & G
Carolina 7/25/1841-3/26/1898
"Mother" nee Schafer
F. W. 9/8/1832 - 12/5/1898
Matilda 7/3/1855-1/27/1877 w/H.
nee Steffan
Emma B. 8/31/1876-3/27/1877 d/F&D
Maria M. 1/27-2/2/1877 d/H & M.
Herman 12/15/1847-3/19/1882
Herman 2/12-7/7/1879 s/H & M

ST. THOMAS UCC, page 2

MUELLER, Charles C. 10/3/1871 - 8/11/1917
 Emily 8/6/1903 - 2/9/1920
 Beatrice b-d 1906
 Leona A. 1900 - 1901
 Edith G. 9/28/1892-1/15/1917 w/Rus.
 Irma & Ruth, twins b-d 1912

ORR, William "This stone marks the spot
 where the _____ of William Orr was
 buried _____ Renfrow Co. Scotland
 May 1832" (stone sunken)

OBRIST, William H. 1854 - 1929
 Maggie 1856 - 1956

PAUBEL, Edward 12/1/1840 - 12/28/1886
 E. Carolina 1/17/1848-9/4/1882
 Carolina & Edw. Karl, b-d 1882 (twins)
 Louis 5/6/1869-2/14/1881 s/E & C.

PUELLMAN, Russell 1888 - 1903
 Louis H. 1861 - 1930
 Mary 1860 - 1931

RAKEY, Bertha 11/29/1861-8/21/1897 Mother
 Henry 1/21/1890 - 9/18/1916
 Bertha 1841 -

REIGERT, Joseph 2/28/1826 - 10/6/1912
 Katherina M. 11/25/1836 -
 Amalie 10/31/1872-9/14/1878 d/J & M
 Nickolaus 12/6/1801 - 2/10/1852
 Anna Maria d 4/11/1872 ae 67y 3m

RICKARD, Matilda 6/18/1883 - 3/10/1898

RUPPEL, Walter W. b-d Feb 1929
 John George 11/26/1856 - 10/20/1923)ss
 Johanna 8/21/1861-11/23/1947

RICKARD, Laura b-d 1906 d/P.W. & S.E.
 Eliza d 4/16/1917 ae 69y
 Solomon d 11/4/1909 ae 68y

SANDER, Franz H. 5/21/1840-8/8/1885
 Anna M. L. 3/9/1842-5/5/1910

SAPPINGTON, Elizabeth 3/19/1870-4/28/1919 w/Jas.W.
 James W. 4/6/1863-12/22/1942

SAUERWEIN, Christian 11/5/1863-10/30/1900

SCHAEFFER, Harold 2/28/1914-5/7/1930 s/C & L.
 Florence E. 1911-1921 d/"

Amelia Marie 1908-1919 d/Wm & Margt.
 Willie b-d 1870 s/Wm & Mary
 Friedericke 1862-1881 d/W. & M.
 Wm. H. 4/6/1834 - 2/7/1888 Father
 Mary C. 11/1/1843-12/27/1921 Mother
 Casper Heinrich d 1/21/1869 ae 77y
 Margaretha 6/25/1835-2/20/1888
 Laura 7/25/1846-9/26/1872 w/Michael W.
 Heinrich d 1876 ae 39y
 Clifford 4/12/1910 - 2/11/1927 s/John&A.

SCHAEG, Amelia 11/8/1899-1/5/1929 nee Bauer
 Harold W. 1921-1929
 Walter A.V. 5/11/1895-11/10/1923
 Paul 5/15/1844-7/9/1895 Father

SCHILLER, John 12/3/1833 - 3/21/1893
 Charley 6/27/1880 - 2/15/1891
 Henry E. 3/3/1861 - 3/11/1872
 Henrietta M.A. 7/9/1841-1/20/1918 Moth.
 Ernst H. d 1/31/1888 ae 23 s/J & AH

SCHULTZ, Roland 6/12/1910 s/Rudolf & Amanda

SCHUSTER, Herman E. 4/25/1839 - 11/26/1886

SIEMERING, George Edw. Aug-Nov 1888 s/R.D. & M.

STEFFAN, Mary 5/21/1841-1/21/1904 w/Adam
 Adam 6/9/1836 - 9/6/1909
 Anna Margaretha 2/15/1814-12/11/1876
 w/Peter
 Caroline 1/4/1882 - 11/1/1910
 John L. 10/15/1880 - 12/25/1910

STEFFEN, Bertha 1836 - 1901

SUTTON, Reba Marie 1/26/1909-5/22/1911 d/S&L

TERRY, Lillie 10/17/1889 - 7/7/1925

VANDERBLOEMAN, J.P. 1870 - 1907

WALTER, Louis 7/25/1846-9/26/1872
 w/Michael
 William J. 12/21/1891-12/14/1918
 Pearl)twins of John & Anna b-d 1903
 Pansy
 Anna M. 2/24/1863-5/19/1912
 Conrad 2/4/1876 - 5/11/1917
 ?
 Either WEINRICH or WALTER
 WETZEL, Cornelius A. 7/3/1880-1/30/1899
 Henry 1/10/1853-12/29/1900
 Katherine 11/22/1857-12/14/1893
 nee Reigert
 Peter 7/13/1863 - 11/30/1925
 Mollie B. 12/21/1865-1/20/1923

WOODRUFF, Minnie L. 2/5/1882-6/21/1896
 d/W.H. & Julia M.

ZIEMANN, Maud 3/21/1879 - 8/23/1907
 w/Henry

ALSO: one stone, apparently

"Our Grandfather, HENRY BJUNTE"

near the Schiller graves

++

++

++



HISTORIC INVENTORY

SL-AS-020-056

1 No 17U120100		4 Present Name(s) former St. Thomas Evangelical Church		1 No 2 County St. Louis 3 Location of Negatives 2404-25
2 County St. Louis		5. Other Name(s) <i>not entered</i>		
3 Location of Negatives 2404-25		150 Building, 150 Long Road		
6 Specific Location .85 acre in Survey 126, T45 R4, pt. Lot 1 Damian Kroenung Estate		16. Thematic Category		28. No. of Stories 1 29. Basement? Yes ☒ No ☐ 30. Foundation Material concrete 31. Wall Construction frame 32. Roof Type & Material gable, comp. 33. No. of Bays Front 3 Side 5 34. Wall Treatment 35. Plan Shape irregular 36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐ 37. Condition Interior _____ Exterior good 38. Preservation Underway? Yes ☐ No ☒ 39. Endangered? By What? Yes ☐ No ☒ 40. Visible from Public Road? Yes ☒ No ☐ 41. Distance from and Frontage on Road /208
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1908-09; 1919		
8 Site Plan with North Arrow		18 Style or Design contemporary		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent church		
		22 Present Use offices		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Gene V. & Carol Ann Mainini 16624 Chesterfield Airport Road		
9 Coordinates UTM Lat _____ Long _____		25. Open to Public? Yes ☒ No ☐		
0 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		
1. On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		
12. Is It Eligible? Yes ☐ No ☐				
3 Part of Estab Hist Dist? Yes ☐ No ☒				
14. District Potent'l? Yes ☒ No ☐				
5 Name of Established District				
12 Further Description of Important Features The building was radically transformed from a clapboard church with pointed windows and a front steeple to a modern office structure with rectangular windows, skylights, and an asymmetrical tower. The tower rises above the glazed center entrance. It has two horizontal plate-glass windows, and above that a triangular window angled to correspond to a triangular but flat-topped opening at the roofline. A second matching framework stands behind, over the inside wall of the tower.				Photo
13 History and Significance St. Thomas Church was organized in 1907 by St. John's Evangelical Church in Bellefontaine (Hilltown). The first worship service took place on October 6. This building was started in November 1908 and dedicated on May 23, 1909. The church became part of the United Church of Christ through the merger of several denominations. A new church was built in 1969 at 17842 Wild Horse Creek Road, on a high hill overlooking the (continued)				
14 Description of Environment and Outbuildings				5 Other Name(s) 150 Building, 150 Long Road
5 Sources of Information Gloria Dalton, ed., <u>The Heritage of the Creve Coeur Area</u> (1976), p. 109. St. Louis County Recorder of Deeds, Book 223, page 14				
46. Prepared by Esley Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)				

former St. Thomas Evangelical Church
150 Building, 150 Long Road

43. continued

Gumbo Bottoms. This building was first adapted for use as a residence and then radically transformed into offices in the early 1980's.

795

CHESTERFIELD

HIGHWAY


HUMAN, E. W. JR. 596.31 AC
7039-1488

LONG



17014-0111

17014-0102
IND. DATE 1979
1001 TUNDRA & BEVERLY T. 7086-1129

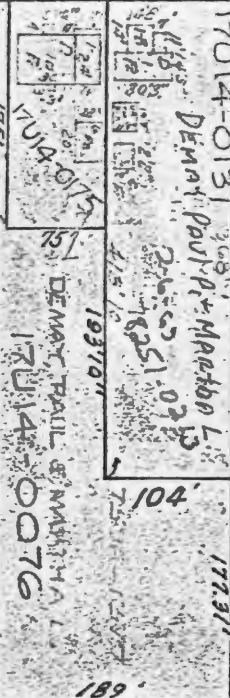


17014-0131
DEMAY, PAUL P. & MARTIN L.
19370

17014-0076
DEMAY, TRAIL, & MARTIN L.


17014-0065
17014-0043

17014-0285
LONG INVESTMENT Co.
8.08 AC.
3278-1129

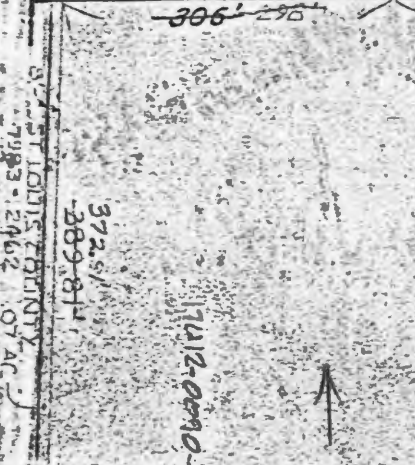

372.51
309.81

17012-0070



17012-0089
17012-0090
CML
178.00

17012-0089
472.05
3.00 ACRES

KIRCHOFF, LYDIA S. ET AL
801-1710

281.01

KIRCHOFF, LY

17012

17023-0015

12.00 AC

650.05





HISTORIC INVENTORY

1 No 19S420327		4 Present Name(s) Ernst Eberwein House		1 No	
2 County St. Louis		5 Other Name(s)		2 County St. Louis	
3 Location of Negatives 33061-before 0		1627 Old Baxter Road		4 Present Name(s) Ernst Eberwein House	
6 Specific Location 15.47 acres in Survey 2002 T45- R4, part of Henry Eberwein Estate		16 Thematic Category		28 No. of Stories 2½	
7 City or Town II Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1895		29 Basement? Yes ☒ No	
8 Site Plan with North Arrow SUR. 1978		18 Style or Design Queen Anne 45 49		30 Foundation Material stone 40	
		19 Architect or Engineer		31 Wall Construction frame WW	
		20 Contractor or Builder		32 Roof Type & Material 16 cross gable, comp.	
		21 Original Use, if apparent residence OIA		33 No. of Bays Front Side	
		22 Present Use residence		34 Wall Treatment clapboard 21 22	
		23 Ownership Public ☐ Private ☒		35 Plan Shape irr. cross CR	
		24 Owner's Name & Address, if known Earl O. & Virginia L. Eberwein		36 Changes (Explain in #42) Addition: WA SI Altered: Moved:	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒		37 Condition Interior Exterior good	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization		38 Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		39 Endangered? By What? Yes ☐ No ☒	
12 Is II Eligible? Yes ☐ No ☐				40 Visible from Public Road? Yes ☒ No	
13 Part of Estab Hist Dist? Yes ☐ No ☒				41 Distance from and Frontage on Road /about 900'	
14 District Potent'l? Yes ☐ No ☒					
15 Name of Established District					
42 Further Description of Important Features This is a good and well-maintained example of a turn-of-the-century rural house. It has a wrap-around porch with a hipped roof, plain frieze, Tuscan columns, square balusters and rectangular latticework under the wood floor. Gable ends have turned-in bargeboards and round-headed shingles. Windows are one-over-one. An outside basement entrance is at one corner of the south wing. At the southwest corner is a back porch similar to the front one, but with fitted screens.		43 History and Significance Henry or Heinrich Eberwein acquired all of U. S. Survey 1978, 431.54 acres, in 1835. A native of Prussia, he died in 1888. His youngest son Ernst inherited Lot 6, 76.81 acres, at the northwest corner of the survey. In 1892, he purchased another 72.14 acres across Baxter Road to the northwest, the site of this house. He paid the sellers, Nicholas and Margaret Long of Greene County, Missouri, \$3,246.30. Ernst died in		44 Description of Environment and Outbuildings The well-landscaped grounds of this property include a large red-painted barn and a small three-bay frame house with blank ends. It has chimneys at center and north end and six-over-six windows. Historically, Clarkson Road met Baxter Road at the southeast corner of this property and turned around the east side of the farm.	
45 Sources of Information St. Louis County Probate Court, 613, 13716, 36127 St. Louis County Recorder of Deeds, Book 65, page 37		46 Prepared by E. Hamilton		47 Organization St. Louis County Parks	
		48 Date 8/89		49 Revision Date(s)	

1 No

2 County
St. Louis

4 Present Name(s)
Ernst Eberwein House

5 Other Name(s)
1627 Old Baxter Road

Ernst Eberwein House
1627 Old Baxter Road

43. continued

1939, leaving this tract to his son Otto E. Eberwein and the rest of his farm to his daughters Amelia and Matilda and to two grandchildren, Elmer Eberwein and Christina Smith. Otto E Eberwein died in 1964 at the age of 79, leaving a widow Catherine Margaret, called Maggie C., and son Earl O. By then the real estate which was somewhat reduced in extent, was valued at \$45,000. The house remains the property of Earl O. Eberwein, grandson of the builder.

44. continued

Clarkson Road has now been cut through the northwest part of the farm from southwest to the northeast, and Baxter Road has been rerouted from southeast to northwest. The old right-angled turn, now purely a local road, is now called Old Baxter Road.

St. A5-020-057



ARKSON SQUARE PLAT 1
BNDY. ADJ. OF LOTS 1 & 3

886

SL-AS-020-057

900

3

ROAD

DR 6085-399
8035-2094

19513-0224

EBERWEIN EARL O. VIRGINIA L.
6085-399
15:47 AC

19542-0327

360.0 ROAD

200.64' ✓ 811.80
26.11.5'
OLD BAXTER
2002

19913.0170

(893)

R-6 DISTRICT LINE
SEE BK.9, PG.852A

CLARKSON

3-0015



HISTORIC INVENTORY

1 No. 19S140036		4 Present Name(s) Eberwein-Howe House		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 33015-36A		1734 Old Baxter Road		
6 Specific Location 1.54 acres, N. part of Lot 4, Henry Eberwein's SD of Survey 1978, T45, R4		16 Thematic Category		2 No of Stories 2-1
7 City or Town II Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1850		
8 Site Plan with North Arrow		18 Style or Design vernacular 09		
9 Coordinates UTM Lat Long		19 Architect or Engineer		29 Basement? Yes ☒ No ☐
10 Site I Building ☒ Structure I Object I		20 Contractor or Builder		
11 On National Register? Yes ☐ No ☒		21 Original Use, if apparent residence 01A		
12 Is II Eligible? Yes ☐ No ☐		22 Present Use residence		30 Foundation Material stone 40
13 Part of Estab Hist Dist? Yes ☐ No ☒		23 Ownership Public ☐ Private ☒		
14 District Potent? Yes ☐ No ☒		24 Owner's Name & Address, if known William L. Howe, Jr.		
15 Name of Established District		25 Open to Public? Yes ☐ No ☒		31 Wall Construction frame WU
42 Further Description of Important Features The front entry of this attractive house has a modern concrete stoop with iron railings. Italianate door has arched panels, but immediate surround has sidelights and toplights, and outer surround has carriage lamps and pediment. Bays of front are not evenly spaced, but windows are closer together. Windows are two-over-two with fitted shutters. The one-story, north wing is more recent, with one-over-one windows.		26 Local Contact Person or Organization		
43 History and Significance Henry Eberwein, Senior, acquired all of U.S. Survey 1978 in 1835 from John M. Collins. He lived there the rest of his life, dying in 1888. This house was already standing by 1878, when it was shown in the county atlas, but it may not have been the primary house on the property. From the style of the house, one would guess it was built about 1850. Henry Eberwein divided his farm into six parts for his children. (His grandchild Thomas E. Ravens got 32 acres on Hog Hollow Road.) This house was in Lot 4,		27 Other Surveys in Which Included		
44 Description of Environment and Outbuildings Road widening has reduced the front yard, which is now supported by a retaining wall of railroad ties. The house is partly hidden year round by a row of four large old cedars.		40 Visible from Public Road? Yes ☒ No ☐		32 Roof Type & Material gable, comp GB GB 63
45 Sources of Information St. Louis County Recorder of Deeds, Book 1250, page 53; 3903, 323 and 324. St. Louis City Recorder of Deeds, Book U, page 524. St. Louis County Probate Court, G13, 24595, 26750.		41 Distance from and Frontage on Road /301'		
46 Prepared by Esley Hamilton		47 Organization St. Louis County Parks		
		48 Date 8/89		49 Revision Date(s)

St. Louis

Present Name(s)
Eberwein-Howe HouseOther Name(s)
1734 Old Baxter Road

Eberwein-Howe House
1734 Old Baxter Road

43. continued

which went to Henry Eberwein, a younger son. He apparently died about 1933, when his heirs, who included four daughters and son William, sold the northern part of the tract, 44.19 acres including the house, to William L. and Helen Edwards Howe. Helen Howe died in 1954 and William Howe in 1956, leaving two daughters and a son.

40'W

301-25

273'

ॐ नमो भगवते वासुदेवाय

~~1.7.65~~

Baxter

210.00'

650

122.13

301.25

19514-0036

222.00'

301.25

222.00'

17	18
19	20

59.60

263.99

165

41.90 Acc

R. Emmerdoffer Realty
6568-542 2/9/72

R. Emendorfer Realty

12060.71


0536102

2536. 95



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-059

1 No 16Q130610		4 Present Name(s) Charles Stemme, Junior, House		1. No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34081-5		13916 Olive Blvd.		
6 Specific Location .92 acres in Lot 7 in Share 5 of M.A. Stevens Partition in U.S. Survey 207 & 2030, T46 R4		16. Thematic Category		2. County St. Louis
		17 Date(s) or Period constructed c. 1912		
7 City or Town If Rural, Township & Vicinity Chesterfield		18. Style or Design Foursquare 49		4. Present Name(s) Charles Stemme, Junior, House
8 Site Plan with North Arrow		19. Architect or Engineer		
9 Coordinates UTM Lat _____ Long _____		20. Contractor or Builder		5. Other Name(s) 13916 Olive Blvd.
		21. Original Use, if apparent residence OIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
10 Site ☒ Building ☒ Structure ☐ Object ☐		24. Owner's Name & Address, if known Quality Business Forms 11684 Lackland Rd.		6. Other Name(s)
11. On National Register? Yes ☐ No ☒ 12. Is It Eligible? Yes ☐ No ☐		25. Open to Public? Yes ☐ No ☒		
13. Part of Estab Hist Dist? Yes ☐ No ☒ 14. District Potent'l? Yes ☐ No ☒		26. Local Contact Person or Organization		7. Other Name(s)
15 Name of Established District		27. Other Surveys in Which Included		
42 Further Description of Important Features House has hip-roofed porch across front, with square columns, plain balusters, and wood flooring. Windows have non-working shutters and eight-over-twelve windows. A hip-roofed dormer is in center front. The last bay on east side has a gable with scalloped bargeboards. Behind this is a shed-roofed one-story addition, while to the east is a longer gabled addition of two bays with one-over-one windows and a small cupola.		Photo 		8. Other Name(s)
44 Description of Environment and Outbuildings Property stands several feet above road level. House is approached by drive from east edge of property. It has several attractively maintained outbuildings painted barn red, including a large barn with a circular window on the side.		46. Prepared by E. Hamilton		9. Other Name(s)
45 Sources of Information Allan S. Humphreys, <u>Cordell Records</u> (1940), p. 36. St. Louis County Probate Court, #2258. St. Louis County Recorder of Deeds, Plat Book 5, p. 13; Plat Book 240, p. 13; Marriage Book 74, p. 265; Deed Book 294, page 543 Arland Stemme		47. Organization St. Louis County Parks		
		48. Date 8/89		

Charles Stemme, Junior, House
13916 Olive Boulevard

43. continued


property holdings along Wild Horse Creek Road as well as here. Dr. Stevens died in 1890 and Missouri Stevens in 1894. They left five daughters and three sons, who subdivided the Stevens farms. This part was inherited by the eldest daughter, Ann Tyler Stevens, called Nannie T. She died in 1904. Her will stipulated that seven lots be set aside on Olive, now forming the major part of the Lake settlement, and that the rest of this property be divided between her brother Richard H. Stevens, Jr. (the east part), and her sister Corinne, the wife of Alfred T. Smith (the west part).

In 1912 Richard Stevens and his sons Richard Jr. and John sold their 50 acres to Charles S. Stemme, who owned a large farm west of here. The property became the home of Charles H. Stemme, called Charles Stemme, Junior, his son; and then of Howard William Stemme, his son. Charles S. died in 1938. Howard married Naomi Weiss in 1959. They owned this property until after 1985, when they divided it into two lots. At that time it included both this house and the newer one to the west. Judging by the style of the house, it was probably built about 1910.

SL-AS-020-059

13916

OLIVE





Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY SL-AS-020-060

1 No 16R340160		4 Present Name(s) Charles Stemme House		1 No	
2 County St. Louis		5 Other Name(s)			
3 Location of Negatives 34200-33		13969 Olive Blvd.			
Specific Location 14.21 acres, part of Lot 11, D.J. Talbot SD in Township 46 Range 4 City or Town If Rural, Township & Vicinity Chesterfield Site Plan with North Arrow		16. Thematic Category		2. County St. Louis	
		17 Date(s) or Period constructed 1870's			28. No. of Stories 2-1 1/2
		18. Style or Design vernacular Victorian 09			29. Basement? Yes ☒ No ☐
		19. Architect or Engineer			30. Foundation Material stone 40
		20. Contractor or Builder			31. Wall Construction frame, log CC WK
		21. Original Use, if apparent residence DIA			32. Roof Type & Material hip, comp HP 63
		22. Present Use residence			33. No. of Bays Front 5 Side irr.
		23. Ownership Public ☐ Private ☒			34. Wall Treatment asbestos shingle 64
24. Owner's Name & Address, if known Fred C. Stemme		35. Plan Shape irregular		4. Present Name(s) Charles Stemme House	
		36. Changes (Explain in #42) CB Addition ☒ Altered ☒ Moved ☐			
25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior good			
26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☒			
27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☒			
28. Other Surveys in Which Included		40. Visible from Public Road? Yes ☒ No ☐			
29. Other Surveys in Which Included		41. Distance from and Frontage on Road			
30. Other Surveys in Which Included		42. Further Description of Important Features The front part of this house is rectangular, with blank ends. The windows are two-over-two, except for a small one in the center over the door. Windows have modern shutters of unusual pattern, with squares and diamonds in contrasting colors to the background. The front porch is one bay with a gabled roof. It has elaborate segmental arches springing from square posts. It has a dentilled cornice and pedimented gable. The front door has sidelights and a long toplight. The rear wing is lower, about a			5. Other Name(s) 13969 Olive Blvd.
31. Other Surveys in Which Included		Photo			
32. Other Surveys in Which Included					
43 History and Significance This farm is part of a larger tract once owned by Daniel J. Talbot. His heirs divided the farm into 11 lots between 1862 and 1870, laying out Hog Hollow Road to give access to the lots in the bottom below the bluff. Lot 11, about 44 acres, was acquired by Charles Stemme between 1870 & 1878. Charles S. Stemme, Senior died in 1938 leaving five children: Charles H., Junior, Fred C., Ernst L., Lillian E. Burkhardt, and Huldah A. Vohsen. The farm passed to son Fred C. who married Louise Vohsen and raised		44 Description of Environment and Outbuildings In the west yard is a small one-by-one bay building with a gable roof and two-over-two window. Other outbuildings include a two-bay shed, a three-bay garage for farm vehicles, a small shiplap-sided building and another of red-painted vertical siding. The whole site is well above road-level at the top of a		(5)	
45 Sources of Information St. Louis County Probate Court, #13204 Arland (Mrs. Wesley) Stemme Gloria Dalton, ed. <u>Heritage of the Creve Coeur Area</u> (1976), p. 87.		46. Prepared by E. Hamilton			
		47. Organization St. Louis County Parks			
		48. Date 8/89			
		49. Revision Date(s)			

Charles Stemme House
13969 Olive Blvd.

42. continued

story and a half. It has a shed-roof screen porch along the west side.

43. continued



sons Walter, Stanley and Wesley here. The farm is still operated by Wesley Stemme and his son Warren. Herman Stemme was also a prominent farmer in this area, but this was not his house.

44. continued


steep bank, and the house is further screened by several old trees.

SL-AS-020-060

LD MANOR INC.
16R34-0151

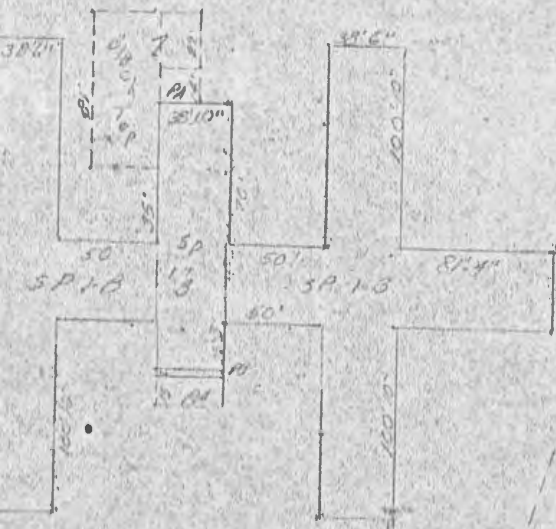

Stemme, Fred C.
1885 AC
16R34-0160

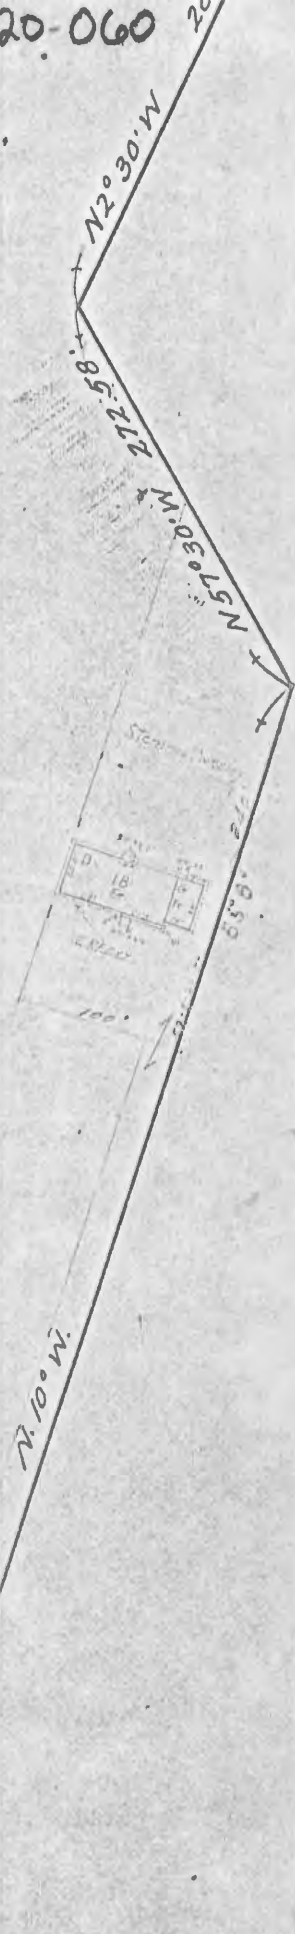

145.90'
1A
JONES, THOMAS W. &
D.
7841-88
RES.
DATE
16R34-0207

5'61° 44' W. 330'

60' W

818

BLVD.



SL-A5-020-061

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No. 16R340061 2 County St. Louis 3 Location of Negatives 34081-4	4 Present Name(s) Hill-Sellenriek House 5 Other Name(s) 14008 Olive Boulevard	1 No	
6 Specific Location .34 acres, the E 50' of W$\frac{1}{2}$ of Lot 4 in SD of Lot 7, Share 5 of M.A. Stevens Est. in Sur. 206 7 City or Town ☐ If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16. Thematic Category 17 Date(s) or Period constructed c. 1925 18. Style or Design vernacular 69 19. Architect or Engineer 20. Contractor or Builder 21. Original Use, if apparent residence OIA OE 22 Present Use store 23 Ownership Public ☐ Private ☒ 24. Owner's Name & Address, if known Boime, Alan & Lora H/W 606 North & South Rd. 63130 25. Open to Public? Yes ☒ No ☐ 26. Local Contact Person or Organization Cohen Appliance 27. Other Surveys in Which Included	28. No. of Stories 1 29. Basement? Yes ☒ No ☐ full 30. Foundation Material 40 65 rock-faced concrete 31. Wall Construction/Block brick 40 32. Roof Type & Material gable, comp GB 63 33. No. of Bays Front 2 Side 4 34. Wall Treatment painted white 30 35. Plan Shape rectangular 36. Changes Addition ☐ (Explain in #42) ☒ Altered ☒ Moved ☐ 37. Condition Interior _____ Exterior good 38. Preservation Yes ☐ Underway? No ☒ 39. Endangered? Yes ☐ By What? No ☐ 40. Visible from Yes ☒ Public Road? No ☐ 41. Distance from and Frontage on Road 50/60	2. County St. Louis
9 Coordinates UTM Lat _____ Long _____ 10 Site ☐ Building ☒ Structure ☐ Object ☐ 11 On National Register? Yes ☐ No ☒ 12 Is It Eligible? Yes ☐ No ☐ 13 Part of Estab Hist Dist? Yes ☐ No ☒ 14. District Potent'l? Yes ☒ No ☐ 15 Name of Established District	42 Further Description of Important Features Foundation is at ground level in back, where there is a paved area. Windows of various sizes on the sides have been blocked, but the lugsills are still visible. In front the door and display window have thick lintels. Since the ground drops away on each side of the front of the building, retaining walls with parapets extend toward the street. They match the foundation and walls of the main building.		4 Present Name(s) Hill-Sellenriek House
43 History and Significance This store was built as a residence on part of a lot that had been acquired in 1906 by Charles Stemme from the estate of Nannie T. Stevens. He lived near here on Olive. He sold this lot in 1924 to George C. Hill, Jr., the grandson of the August Hill for whom Hilltown was named. Hill had already bought some land from Stemme in 1913. He may have built this house. He sold the lot in 1927 to Louis A. Sellenriek,		5 Other Name(s) 14008 Olive	
44 Description of Environment and Outbuildings This is part of the old rural crossroads of Lake, also called Hog Hollow.			
45 Sources of Information Neil W. Reising St. Louis County Recorder of Deeds, Book 188, page 79; 658, 229; 814, 639		46. Prepared by E. Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49 Revision Date(s)	

Hill-Sellenriek House
14008 Olive Boulevard

43. continued

who was a son of Wilhelm Sellenriek of White Road, and brother of Edward. Sellenriek lived here for many years, gradually adapting the house for a barbershop and then other businesses.

6Q13-0225
7845-1924

16Q13-02
6820-2209
QUEBERT, M.K.
0.62
7.80

AD
16Q17
HOLIFIELD

767
2

38-330-1-66496-549995

EST

RD



WESTBURY NO.2
SEE PAGE 803 M

254. 253 12/31/62
K. R. G. DEVELOPMENT C
12 109 Act

LOT 7

WEST BURY

SEE PAGE

OLIVE

14150

COHEN
APPLIANCE & TV
"The Built-in Appliance People"
90 Days Interest Free

90
DAYS
SAME
AS CASH

COHEN
APPLIANCE
AND
T.V.
"THE BUILT IN APPLIANCE PEOPLE"

FREE
DELIVERY
AND
HAIL-A-WAY

14008

PARKING
IN
REAR

Amana

ZENITH Magic Chef
Whirlpool

MAYTAG *Amana*
MITSUBISHI

HISTORIC INVENTORY

1 No 16R320261		4 Present Name(s) Zierenberg John Deere Store		1 No St. Louis
2 County St. Louis		5. Other Name(s) 14150 Olive <i>Boulevard Building</i>		
3 Location of Negatives Chesterfield				
6 Specific Location East 1/2 of Lot 2 & West 50 ft. of Lot 3, in SD of Lot 7, Share 5, Missouri A. Stevens SD		16. Thematic Category		2. County St. Louis 4. Present Name(s) Zierenberg John Deere Store 5. Other Name(s) 14150 Olive
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1913		
8 Site Plan with North Arrow		18. Style or Design vernacular <i>69</i>		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent store <i>02</i>		
		22 Present Use vacant		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Edward & Christine Knoll 11 Lindworth Lane		
		25. Open to Public? Yes ☐ No ☒		
		26. Local Contact Person or Organization Hilliker Corp, leasing 726-0039		
		27. Other Surveys in Which Included		
9 Coordinates UTM Lat Long		28. No. of Stories		
10 Site ☐ Building ☒ Structure ☐ Object ☐		29. Basement? Yes ☒ No ☐		
11. On National Register? Yes ☐ No ☒	12. Is It Eligible? Yes ☐ No ☐	30. Foundation Material brick <i>30</i>		
13 Part of Estab Hist Dist? Yes ☐ No ☒	14. District Potent'l? Yes ☐ No ☒	31. Wall Construction brick <i>UD</i>		
15 Name of Established District		32. Roof Type & Material gable, comp <i>GB 63</i>		
		33. No. of Bays Front 6 Side 3		
		34. Wall Treatment <i>30</i> common bond, painted		
		35. Plan Shape rectangular		
		36. Changes (Explain in #42) Addition ☐ Altered ☒ Moved ☐		
		37. Condition Interior Exterior <i>fair</i>		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☒ No ☐ vacant		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /50		
42 Further Description of Important Features Until recently the building was occupied by Hog Hollow Hardware, whose sign still hangs out front from the clapboarded front gable. The three front display windows, each of twelve panes, are sheltered by a nearly flat shed roof. Side windows have segmental-arched tops but are mostly closed over. One exposed window is two-over-two. The ground drops from front to back, exposing the basement fully at the rear. The back wall is the only one not painted. It has a closed garage door at basement level and an outside				3. Photo
43 History and Significance This land is part of a tract of two lots acquired by Charles Stemme from the estate of Nannie Stevens in 1905. He sold the west 50 feet of Lot 3 in 1913 to E. (Ernst) W. Zierenberg, who soon built the present building there. It was for many years a dealership for John Deere farm equipment. Zierenberg and his wife Wilhelmina also owned two stores on the north side of the street here, where they ran a general store and				
44 Description of Environment and Outbuildings West of the main building are a series of carport-like shelters. They are built into the side of a hill because of the drop in elevation. At the rear is a large parking area. This is part of the old rural crossroads of Lake, also called Hog Hollow.				
45 Sources of Information Neil W. Reising St. Louis County Recorder of Deeds, Book 165, page 636; 312, 361; 2047, 350 St. Louis County Assessor's Office, Survey Book 6, page 82 St. Louis County Probate Court, 20989, 23707, 23708, 23982				46. Prepared by E. Hamilton
				47. Organization St. Louis County Parks
				48. Date 8/89
				49. Revision Date(s)

Zierenberg John Deere Store
14150 Olive Blvd.

42. continued

chimney rising off-center.

43. continued

a blacksmith shop. Their two sons Ernest H. and Herbert C. were partners with their father in the businesses. Mrs. Zierenberg added the east half of lot 2 to the property in 1944. Ernest died in 1949, leaving three small children, twin daughters and a son. E. W. and Wilhelmina both died in 1953.

16Q13-0225
7845-1924
WILSON, REATHER H.

16Q13-0207
6820-2209
DUEBERT, M.K.
0.62 AC.
217.90'
187.80'

16Q13-0582
HOLFIELD, INVESTMENT
7852-747
7622-635
2.67 AC.

EST

OLIVE

187.94'
187.80'
ADJ. LOT
37.563 中
16R34-0252

187.80'
16R32-0201

WESTBURY NO. 2
SEE PAGE 803 M

WESTBURY

SEE PAGE


LOT

SL-AS-070-071

N 7° 18' E

254-1252-12/31
K.R.G. DEVELOPMENT
12/16/99

K.R.G.
63-
12/4

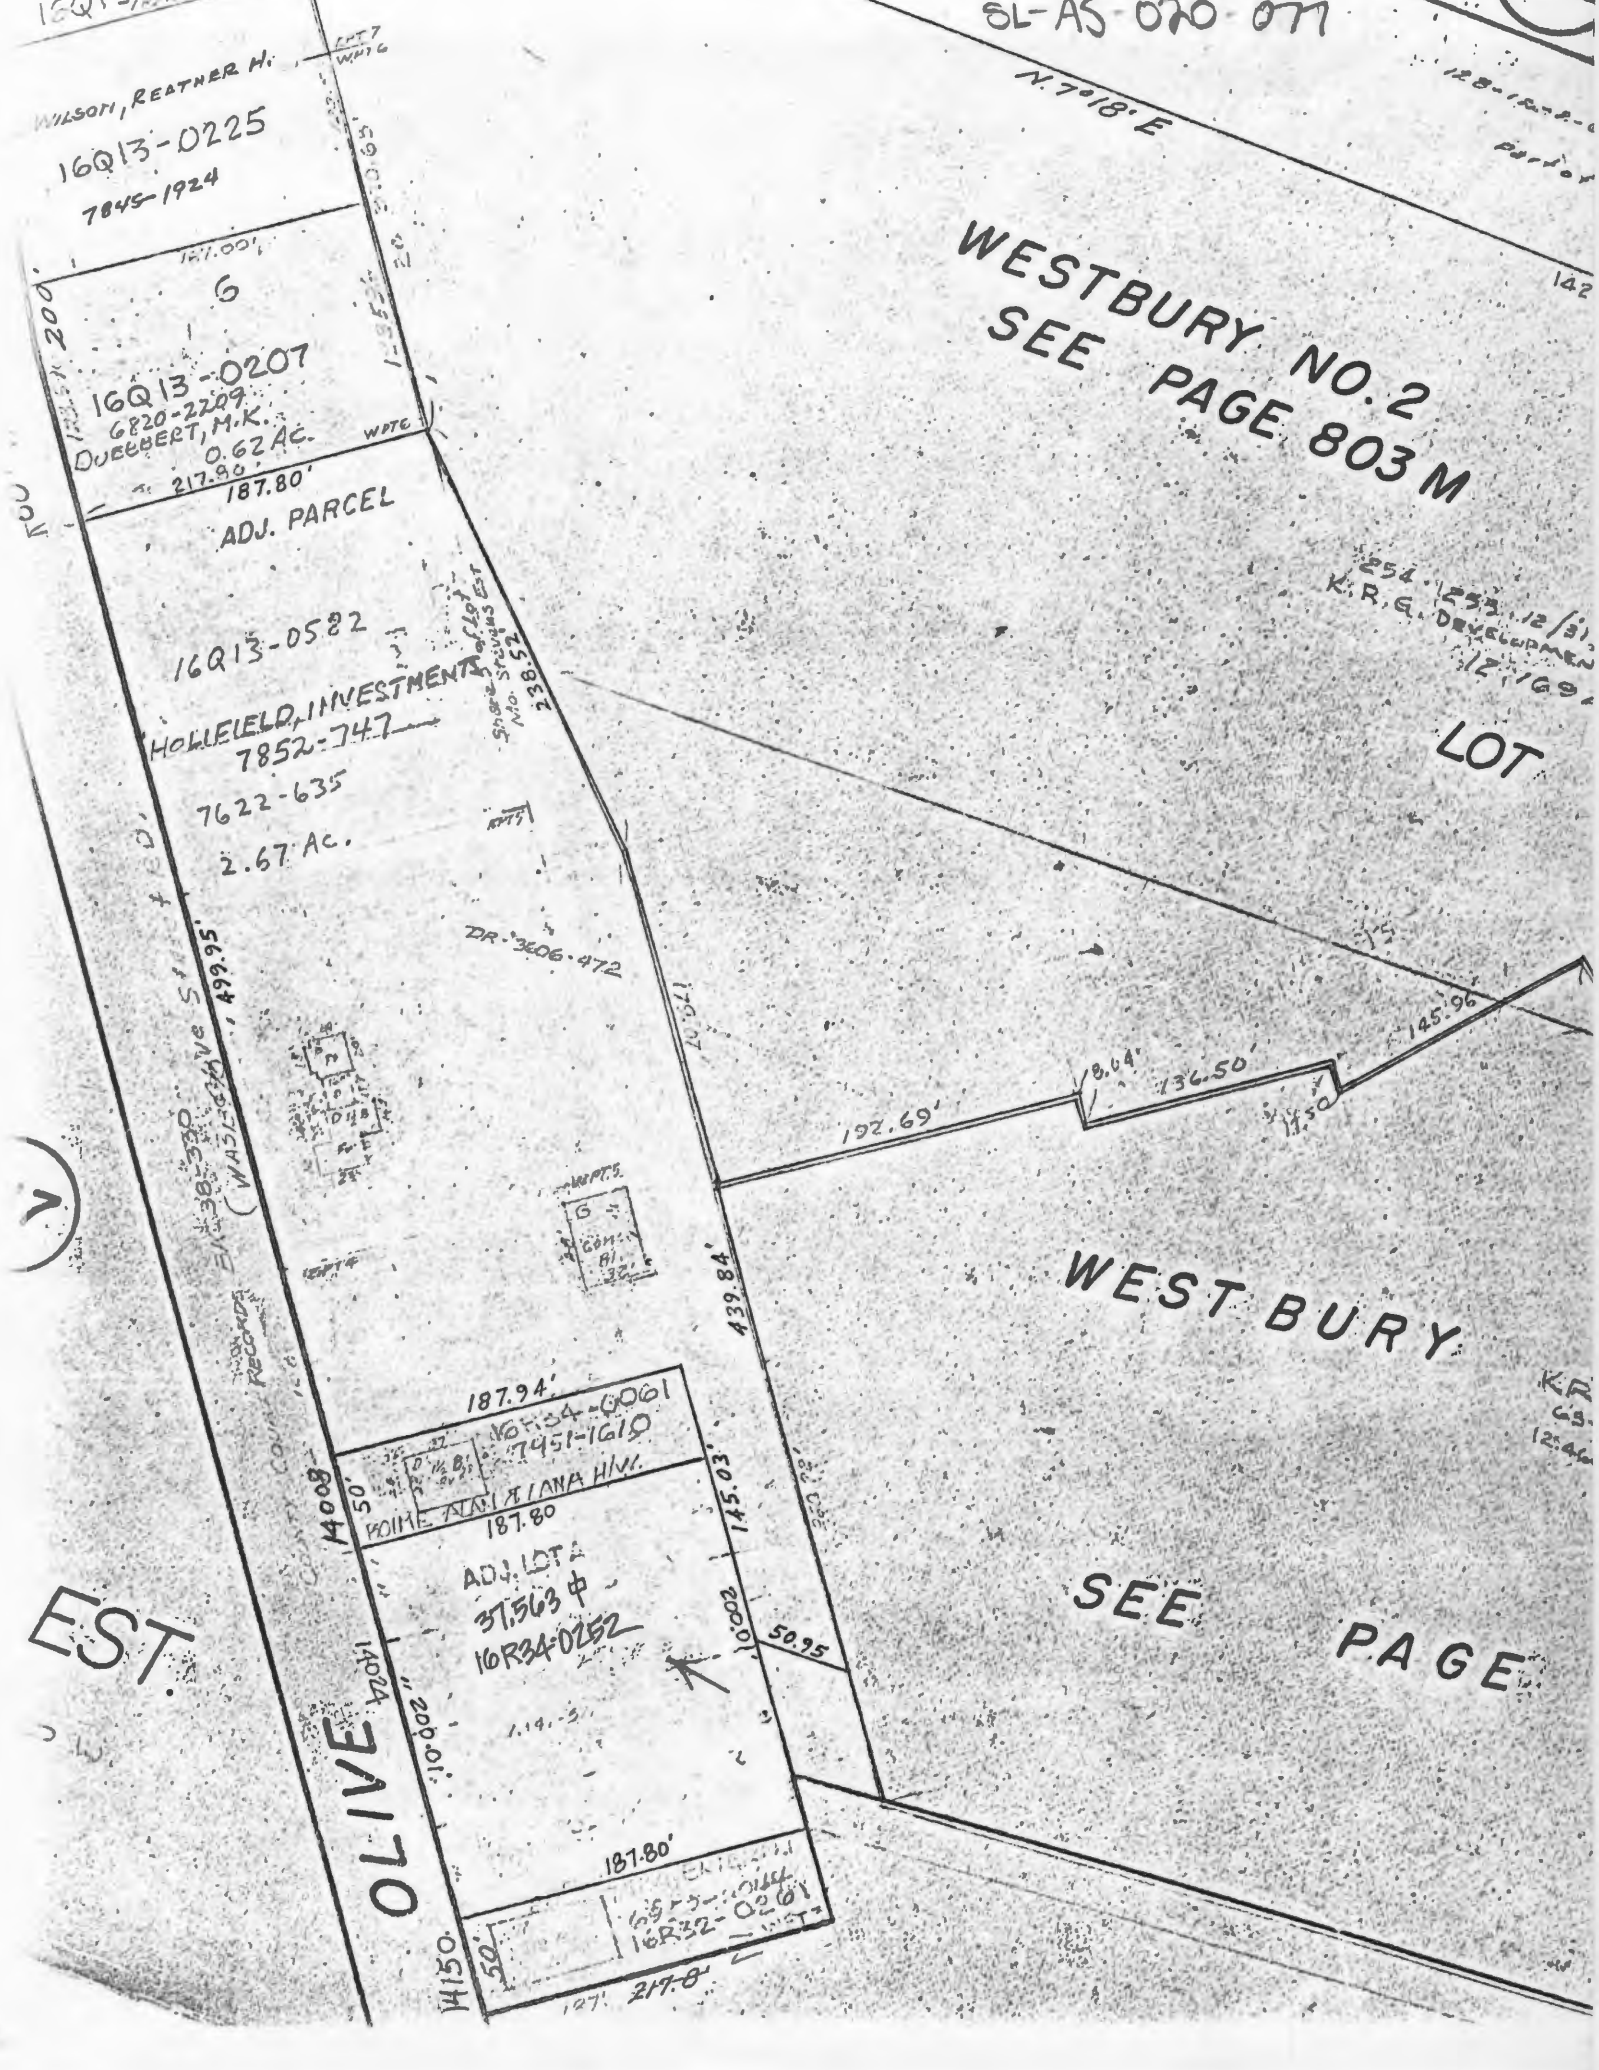

Zierenberg store destroyed by fire in 1918.



Mr. and Mrs. Herbert Zierenberg



**HOG HOLLOW
HARDWARE
PAINT**

HARDWARE

**FOR LEASE
4,500 SQ. FT.
BUILDING
HILLIKER
CORPORATION
726-0039**

HISTORIC INVENTORY

SL-AS-020-062

1 No 16R340270		4 Present Name(s) Zierenberg Mercantile		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34082-36A		14151, 14155 Olive Boulevard		
5 Specific Location 1.97 acres in U.S. Survey 206, NE corner of Olive and Hog Hollow		16 Thematic Category		2 County St. Louis F+ 63
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1918		
4 Site Plan with North Arrow		18 Style or Design Craftsman vernacular 69		
		19 Architect or Engineer		
		20 Contractor or Builder		
		21 Original Use, if apparent store 02F		
		22 Present Use stores		
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Gelber Bank Investors Hog's Breath Inn 11719 Old Ballas Road		
		25 Open to Public? Yes ☒ No ☐		
Coordinates UTM Lat Long		26 Local Contact Person or Organization		4 Present Name(s) Zierenberg Mercantile
0 Site ☐ Building ☒ Structure ☐ Object ☐		27 Other Surveys in Which Included		
1 On National Register? Yes ☐ No ☒				
12 Is It Eligible? Yes ☐ No ☐				
3 Part of Estab Hist Dist? Yes ☐ No ☒				
14 District Potent'l? Yes ☒ No ☐				
5 Name of Established District				
2 Further Description of Important Features The original part of the building is the two-story part to the rear. It has one-over-one windows and a bracketed gable overhang. The additions include two long wings parallel to the road and a canopy and extension in front. The canopy has fat concrete posts and a false mansard roof. It replaces a shallower shed-roof porch on the original building. The west wing is divided into a series of small shops, each with a display window and a separate door. The east wing is devoted to a restaurant, with a terrace in front.		28 No. of Stories 2-1-1		5 Other Name(s) 14151, 14155 Olive Boulevard
		29 Basement? Yes ☐ No ☒ not evident		
		30 Foundation Material prob. concrete 01		
		31 Wall Construction brick UD		
		32 Roof Type & Material Gable, false mansard		
		33 No. of Bays Front 4+ Side irr. 6		
		34 Wall Treatment stretcher bond 30		
		35 Plan Shape irregular		
		36 Changes (Explain in #42) other 20 Addition ☒ Altered ☒ Moved ☐		
		37 Condition Interior Exterior good		
		38 Preservation Underway? Yes ☐ No ☒		
		39 Endangered? By What? Yes ☐ No ☒		
		40 Visible from Public Road? Yes ☒ No ☐		
		41 Distance from and Frontage on Road 145/370		
13 History and Significance This building was the focus of the rural crossroads settlement of Lake, also called Hog Hollow. The general store is said to have been founded on this location shortly after the Civil War. It was taken over about 1900 by Ernst W. Zierenberg and his wife from her mother Mrs. Herman Schaeper. The old frame building with its widow's walk was destroyed by fire in 1981 and replaced by this building, which also served as an early gas-oline filling station. Other services included a blacksmith, saloon, ice house and weigh station. Rooms for travelers were kept on the second floor. The front of the property is all paved for parking. To the west the property borders Hog Hollow Road.		Photo		
14 Description of Environment and Outbuildings				
5 Sources of Information Gloria Dalton, ed. <u>Heritage of the Creve Coeur Area</u> (1976), pp. 51 - 53.		46 Prepared by Esley Hamilton		
		47 Organization St. Louis County Parks		
		48 Date 8/89		
		49 Revision Date(s)		

Lake

Mr. and Mrs. Herbert Zierenberg



E. W. Zierenberg Mercantile as it appeared in 1918.

85' ±
16R32 0838
GELBER-BANK
INVESTORS
6736-1359 70
0.06 AC.

S. 7° 46' E.

HOG HOLLOW 40'W. 365.64' RL
145'±

6736-1359
Gabeler-Bühn Investor

16R34-0270

1.97 AC,

16R34 - 0133

KEYMER, HARVEY E.
7364-2322

16R34-0142

KEYMER, HARVEY A.
7384-2322 S.S.

817

OLIVE

60'W.

SURVEY



SL-AS-020-063

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 16R320205 2 County St. Louis 3 Location of Negatives 34082-33	4 Present Name(s) Frederick W. Reising House 5. Other Name(s) 14160 Olive Blvd.					
Specific Location .43 acres in T46 R4, the west 100 ft. of Lot 2 of Nannie T. Stevens SD in Sur. 206 7 City or Town If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16. Thematic Category 17 Date(s) or Period constructed c. 1931 18. Style or Design Tudor 53 49 19. Architect or Engineer 20. Contractor or Builder 21. Original Use, if apparent residence DIA 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24. Owner's Name & Address, if known Laverna Reising 25. Open to Public? Yes ☐ No ☒ 26 Local Contact Person or Organization 27. Other Surveys in Which Included	28. No. of Stories 1½ 29. Basement? Yes ☒ No ☐ 30. Foundation Material concrete 65 31. Wall Construction brick WD 32. Roof Type & Material 6B 6B cross gable, comp 6B 63 33. No. of Bays DR Front irr 3 Side 5 34. Wall Treatment 30 American common bond 35. Plan Shape irregular 36. Changes (Explain in #42) Addition ☒ Altered ☐ Moved ☐ 37. Condition other 40 20 Interior good Exterior good 38. Preservation Underway? Yes ☐ No ☒ 39. Endangered? By What? Yes ☐ No ☒ 40. Visible from Public Road? Yes ☒ No ☐ 41. Distance from and Frontage on Road 100/100				
9 Coordinates UTM Lat Long 10 Site: ☐ Building ☒ Structure: ☐ Object: ☐ <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>11 On National Register? Yes ☐ No ☒</td> <td>12 Is It Eligible? Yes ☐ No ☐</td> </tr> <tr> <td>13 Part of Estab Hist Dist.? Yes ☐ No ☒</td> <td>14. District Potent'l? Yes ☒ No ☐</td> </tr> </table> 15 Name of Established District	11 On National Register? Yes ☐ No ☒	12 Is It Eligible? Yes ☐ No ☐	13 Part of Estab Hist Dist.? Yes ☐ No ☒	14. District Potent'l? Yes ☒ No ☐	42 Further Description of Important Features Very picturesque small house has large gable over front door descending nearly to the ground. Door has a semicircular top. False half-timbering radiating from top of door is curving and knobby. At either side of the door is a broken-course fieldstone curving quadrant with a concrete top and ending in an elaborately ornamental wrought-iron lamp post. The small casement window in the gable has a shaped lintel and fanciful pierced shutters. The bay to the left of the entry has a large three-part casement. 43 History and Significance This lot was part of a tract of 2 lots purchased by August W. Reising from the estate of Nannie T. Stevens in 1905. Reising, who farmed the nearby bottoms and had a tavern at the foot of Hog Hollow Road, built a house on Lot 1 which subsequently burned and was rebuilt as 14166 Olive Blvd. This house was built for his son Frederick W. Reising. Frederick W. died on June 29, 1953 and his father on July 26, but the house 44 Description of Environment and Outbuildings This house is fairly close to busy Olive Boulevard but is screened by a row of trees. This location is in the old rural crossroads settlement of Lake, also called Hog Hollow. 45 Sources of Information Mr. & Mrs. Neil W. Reising, 391-0201 St. Louis County Recorder of Deeds, Book 165, page 636 St. Louis County Probate Court, 24035, Refusal 9000	
11 On National Register? Yes ☐ No ☒	12 Is It Eligible? Yes ☐ No ☐					
13 Part of Estab Hist Dist.? Yes ☐ No ☒	14. District Potent'l? Yes ☒ No ☐					
		46. Prepared by E. Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)				

1 No

2 County
St. Louis

4 Present Name(s)
Frederick W. Reising House

5 Other Name(s)
14160 Olive Blvd.


Frederick W. Reising House
14160 Olive Blvd.

42. continued

window with a large segmental-arched toplight. The curve of this light is repeated in the cornice above and in the angle of the roof. Above this is a gabled dormer with clapboard walls and paired casement windows. To the east a lower bay has a plain cornice and a window with ornamental shutters. A carport with wrought-iron posts has been added at the east end of the house. Side windows are mostly three-over-one. The ground drops to the rear, fully exposing the basement level.

43 continued

remains the property of Laverna Reising and her three children, Neil W., Lon Kenneth, and Dolores L.

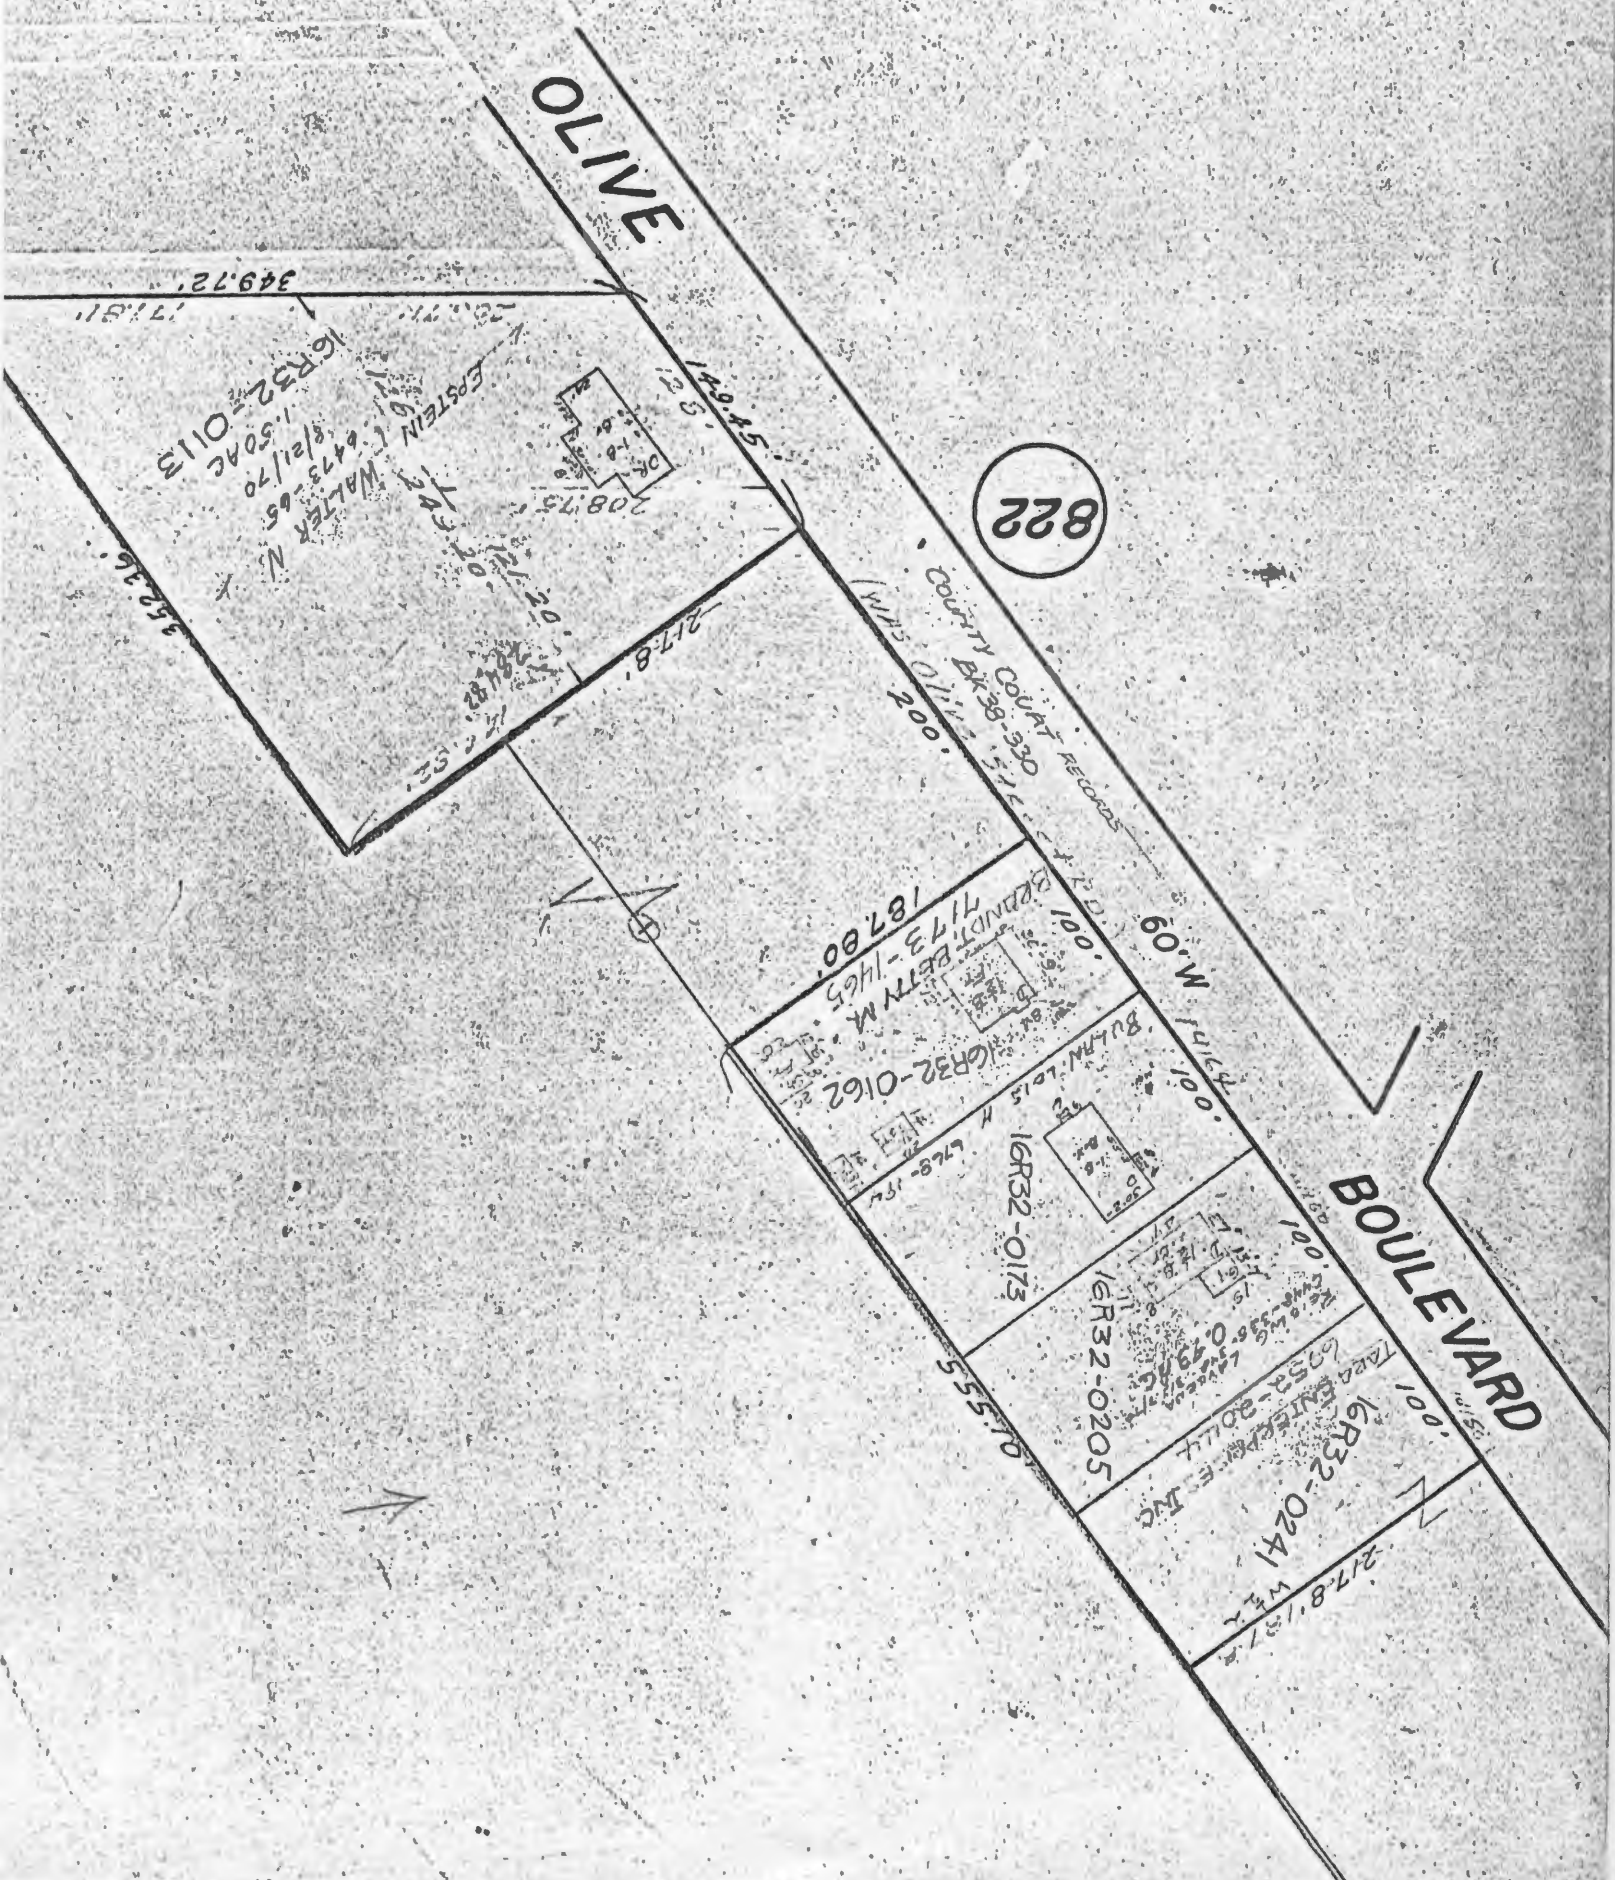



HISTORIC INVENTORY

1 No 16R320162		4 Present Name(s) August W. Reising House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34082-31		14166 Olive		
6 Specific Location West part of Lot 1, Nannie Stevens Estate in Survey 206, T46 R4		16 Thematic Category		2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1914		
8 Site Plan with North Arrow		18 Style or Design bungalow 22		
		19 Architect or Engineer		4 Present Name(s)
		20 Contractor or Builder		
		21 Original Use, if apparent residence DIA		
		22 Present Use antique shop		5 Other Name(s) 14166 Olive
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Betty M. Brandt 504 Richley Drive Ballwin, MO 63011		
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☒ No ☐		14166 Olive
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization Old House in Hog Hollow-469-1019		
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		
12 Is It Eligible? Yes ☐ No ☐				Photo
13 Part of Estab Hist Dist? Yes ☐ No ☒		14 District Potent'l? Yes ☒ No ☐		
15 Name of Established District				
42 Further Description of Important Features Verandah across the front of the house has four short paneled square columns on brick pedestals with stone caps. Porch has railing with rectangular balusters. Main cornice of house has right-angle brackets. Large front dormer is gabled and has projecting rafters. Windows are three-over-one; most are paired or in groups of three. On the east side of house two-window oriel has brackets underneath shed roof with shaped projecting rafters. The front door has a wide multipane toplight and sidelights.				5 Other Name(s) 14166 Olive
43 History and Significance This house sits on the first of three lots acquired by August W. Reising in 1905 from the estate of Nannie T. Stevens. Reising farmed a large tract in the bottom near here and also ran a tavern at the foot of Hog Hollow Road. He built a house here which is shown in the 1909 county atlas, but which burned about 1914. This house is its replacement. It is an excellent example of the bungalow style, with ample				
44 Description of Environment and Outbuildings The front yard and east yard of the property have been paved. House is close to Olive but sheltered by a row of trees. This is the old rural crossroads community of Lake or Hog Hollow.				
45 Sources of Information Mr. & Mrs. Neil W. Reising St. Louis County Recorder of Deeds, Book 165, page 636 St. Louis County Probate Court, 24035				8/89
46 Prepared by E. Hamilton				
47 Organization St. Louis County Parks				
48 Date				49 Revision Date(s)

14166 Olive Blvd.

42. continued

and is glazed itself.

43. continued

interior trim. August Reising died in 1953, less than a month after his son Frederick, who had built 14160 Olive nearby.

BOULEVARD

217.8' 11/31/70
WEX

16R32-0241

TARA ENTERPRISES INC
6952-20114
Raisins
Cans 336
0.33 AC

16R32-0205

16R32-0173

6728-192

16R32-0162

BRANDT BETTY M.
7173-1465
187.00'

BULAN LOIS H

M. 60

COUNTY COURT RECORDS
11/11/70
200'

822

OLIVE

217.8'

208.75'

ERSTEIN
WALTER N
4473-06
8/21/70
1.50 AC
16R32-0113

349.72'

352.36'

171.01'



SL-AS-020-065

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 16R310097		4 Present Name(s) Ravens-Queathem House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives		14319 Olive Street Road		
6 Specific Location 2.54 acres in U.S. Survey 206, Township 45 North, Range 4 East		16 Thematic Category		2 County St. Louis 4 Present Name(s) Ravens-Queathem House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1859, c. 1916 & later		
8 Site Plan with North Arrow		18 Style or Design modified Foursquare 02		
		19 Architect or Engineer		
		20 Contractor or Builder		
		21 Original Use, if apparent residence OIA		
		22 Present Use retail shops		
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known Queathem House Ltd. 14319 Olive Street Road		
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☒ No ☐		
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization		
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		
12 Is Eligible? Yes ☐ No ☐				
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒				
14 District Potent'l? Yes ☐ No ☒				
15 Name of Established District				
42 Further Description of Important Features		28 No. of Stories 2½ - 1 - 1		
The main house is L-shaped, with two one-story hip-roofed wings. The one on the east side is the garage, entered from the rear. Windows in this wing and the main house are one-over-one under segmental arches, while the west wing has newer grouped windows. Most of the older windows have hinged shelters. The door is deeply inset and has a tolight. Centered above it is a hip-roofed dormer with two one-over-one windows. The end chimneys are symmetrical. The date of this house has been subject of much debate. It was probably built at first about the time Jacob Ravens established his farm here, but the remodeling circa 1915 seems to have eliminated all stylistic features of that house, at least externally. The wings and present front porch are still more recent. The 35.08 acres of Jacob Frederick Ravens farm was created by Raven's purchase of 31.02 acres from his neighbor, (continued)		29 Basement? Yes ☒ No ☐		
		30 Foundation Material stone 40		
		31 Wall Construction brick UD		
		32 Roof Type & Material HP hip, comp. HP HP 63		
		33 No. of Bays Front 5+3 Side irr.		
		34 Wall Treatment painted 30		
		35 Plan Shape irregular		
		36 Changes (Explain in #42) Pch, Addition ☒ Altered ☒ Moved ☐ PO		
		37 Condition Interior good Exterior good		
		38 Preservation Underway? Yes ☐ No ☒		
39 Endangered? By What? Yes ☐ No ☒				
40 Visible from Public Road? Yes ☒ No ☐				
41 Distance from and Frontage on Road /355				
43 History and Significance		Photo		5 Other Name(s) 14319 Olive St. Road
44 Description of Environment and Outbuildings				
45 Sources of Information		46 Prepared by E. Hamilton		63
Beverly Fleming, St. Louis County Dept. of Parks & Recreation, 1984.		47 Organization St. Louis County Parks		
St. Louis County Recorder of Deeds, Book 23, p. 507, 509 & 510; 61, 384; 101, 419; 2121, 327.		48 Date 7/89 49 Revision Date(s)		
St. Louis City Recorder of Deeds, Book 211, p. 523; 213, 251; 384, 472; 419, 320.				
continued				

Ravens-Queathem House
14319 Conway Road

43. continued

Lucius Lee Bates, on March 14, 1859 and the 4.06 residue of a 8-10 acre tract purchased from Richard T. Stevens on January 18, 1859. The farm was located just west of Lake, Missouri and Hog Hollow Road on the north site of Olive Street Road. The Ravens family are listed in the 1860 census for Bonhomme Township as Jacob F. and his wife, Anna Catherine (Behmann), ages 48 and 41 respectively, and two teenage sons: Henry W., age 18, and William Wallace, age 16. Jacob Ravens was born in Breman, Germany, his wife in Hanover, and both children in Missouri. Ravens' occupation is listed as a nurseryman.

By 1870 both sons had acquired their own property, although still living in the same household. Between 1860 and 1870 Henry had married. A two-year-old son, Thomas, was living with the family in 1870. A later census (1880) indicates that Henry was divorced.

Jacob Ravens died in 1875. In the 1880 census Henry is living with his son Thomas in a separate household and his occupation is listed as a saloon keeper. The other son, William Wallace Ravens, married Elizabeth Trog and purchased land south of Olive Street Road, just west of the original Ravens farm. That house burned down in a fire.

About 1883 Anna Ravens married Henry Nau, who was one of her farm laborers. She died in January of 1887 and is burried in the Armina Lodge Cemetery on Olive Street Road. This cemetery was for members of a German social lodge and their families. Henry Nau is burried next to her, although he did not die until 1893. His birthdate on the headstone indicates that he would have been age twenty-seven in 1880, or thirty-five years younger than his wife.

After Anna Ravens Nau's death in January, Henry Nau married Elizabeth W. (Lizzie) Matthes in May of the same year. He and his new wife lost a daughter in February of 1888. She is also burried in the Armina Lodge Cemetery. They later had three other children, identified in Henry's will as Minnie, Lena, and Henry.

In 1892 the Naus sold the Ravens property to Herman Schaeper for \$4,200. Herman Schaeper and his wife, Anna W., were from Prussia. He is listed in th 1880 census as a grocer and saloon keeper. Mr. Schaeper was active in the formation of St. John;s United Church of Christ in 1891. Services were held in Schaeper's Hall until January 17, 1892. This hall was across the road from the Ravens farm at the site of the old Lake Public School.

Anna Schaeper, a widow in 1898, sold the Olive Street Road property to Felix and Pauline Queathem. Felix was the second child and eldest son of the eight children of Felix and Marie Elizabeth (Hackmann) Van Quaethem. Felix Van Quaethem was born on a farm near Ruiselede, Belgium. He and his

Ravens-Queathem House
14319 Conway Road

brother, Henri, left Belgium in June, 1857. They first went to Chicago and then Felix came to St. Louis. He worked as a tailor and may have met his future wife through his future father-in-law, Christian Frederick Hackmann, who was also a tailor in St. Louis. The Christian Hackmann family home still stands on Hackmann Lane. Felix and Marie Elizabeth acquired land in 1869 and 1871 along Mosley Road and built a brick house where they raised their family. The house was still standing until recent years. The Van was dropped from their name and their son, Felix, changed the spelling of his name from Quaethem to Queathem. Felix (the second) married Pauline Hoefer and at first they lived on the farm she inherited from her parents (Jacob and Margaret Hoefer) until they purchased the Ravens farm. The Queathems had ten children, eight of whom lived to adulthood. The Queathems owned the property for forty-seven years and thus it is most commonly associated with their name. They also acquired several other farms in the area. The Queathems made extensive changes to the house in about 1916-18, including adding the rear wing and a one-story front porch. They sold the property to Emil E. and Elsa A. Hoechst in 1945 for \$14,000. The Hoechsts also made extensive changes and additions to the house in the late 1940's, including the garage, the sunporch, and the new portico.

In 1984 Queathem House Limited was incorporatd. This group of five area women was able to have the property rezoned as St. Louis County's first Landmark and Preservation Area.

45. continued

St. Louis County Probate Court, 1045, 946.

Gloria Dalton, ed., Heritage of the Creve Coeur Area (City of Creve Coeur, 1976), p. 90.

QUEATHAM HOME 14319 Olive Street Road

Felix Queathem II purchased this outstanding home and 32 acres from Squire Ravens in the community of Lake. The bricks were made on the property.

It is a large white brick home, and is known as the "Panorama", because of its commanding view of the Missouri River. When they were raising their eight children, it was a simple farmhouse. The additions on both sides of the house, and the columns, were added later.

This view was popular among country residents. The Queathems remember long lines of curiosity-seekers stopping at their home to see the view, especially in the time of Missouri River floods. On a clear day much of St. Louis and St. Charles Counties can be seen; even the Chain of Rocks Bridge is in view.

Mr. and Mrs. Queathem were the parents of Irving, Felix, Henry, Victor, Ester Hagemeier, Pauline Weinrich, Mable Freese, and Hazel Sellenriek.



Mrs. Edwin Sellennek



SL-AS-020-065

Exist. Site to Remain

EXIST. Tree

ROAD

286.80'

Exist. Fence

Existing Septic Tank And Drain Field

Beer and/or Wine Garden

10' x 25' LOADING SPACE

NOTE! DASH SHEET Asphalt

Existing Structure

Property n/f Hackman, Clarence H. Jr. & Marian J.

A

PRIVATE

N 11° 15' W

35.45' 94° 05'

114.8'

Iron Pipe

S. 73° 04' W

94.67' 5:1 TAPER

30' ENTRANCE EXISTING ROCK DRIVE

R = 2262

15" CMP.

Sign-Max. 15 SQ.

25' MIN.


R = 107

OLIVE

60

PT

821
A

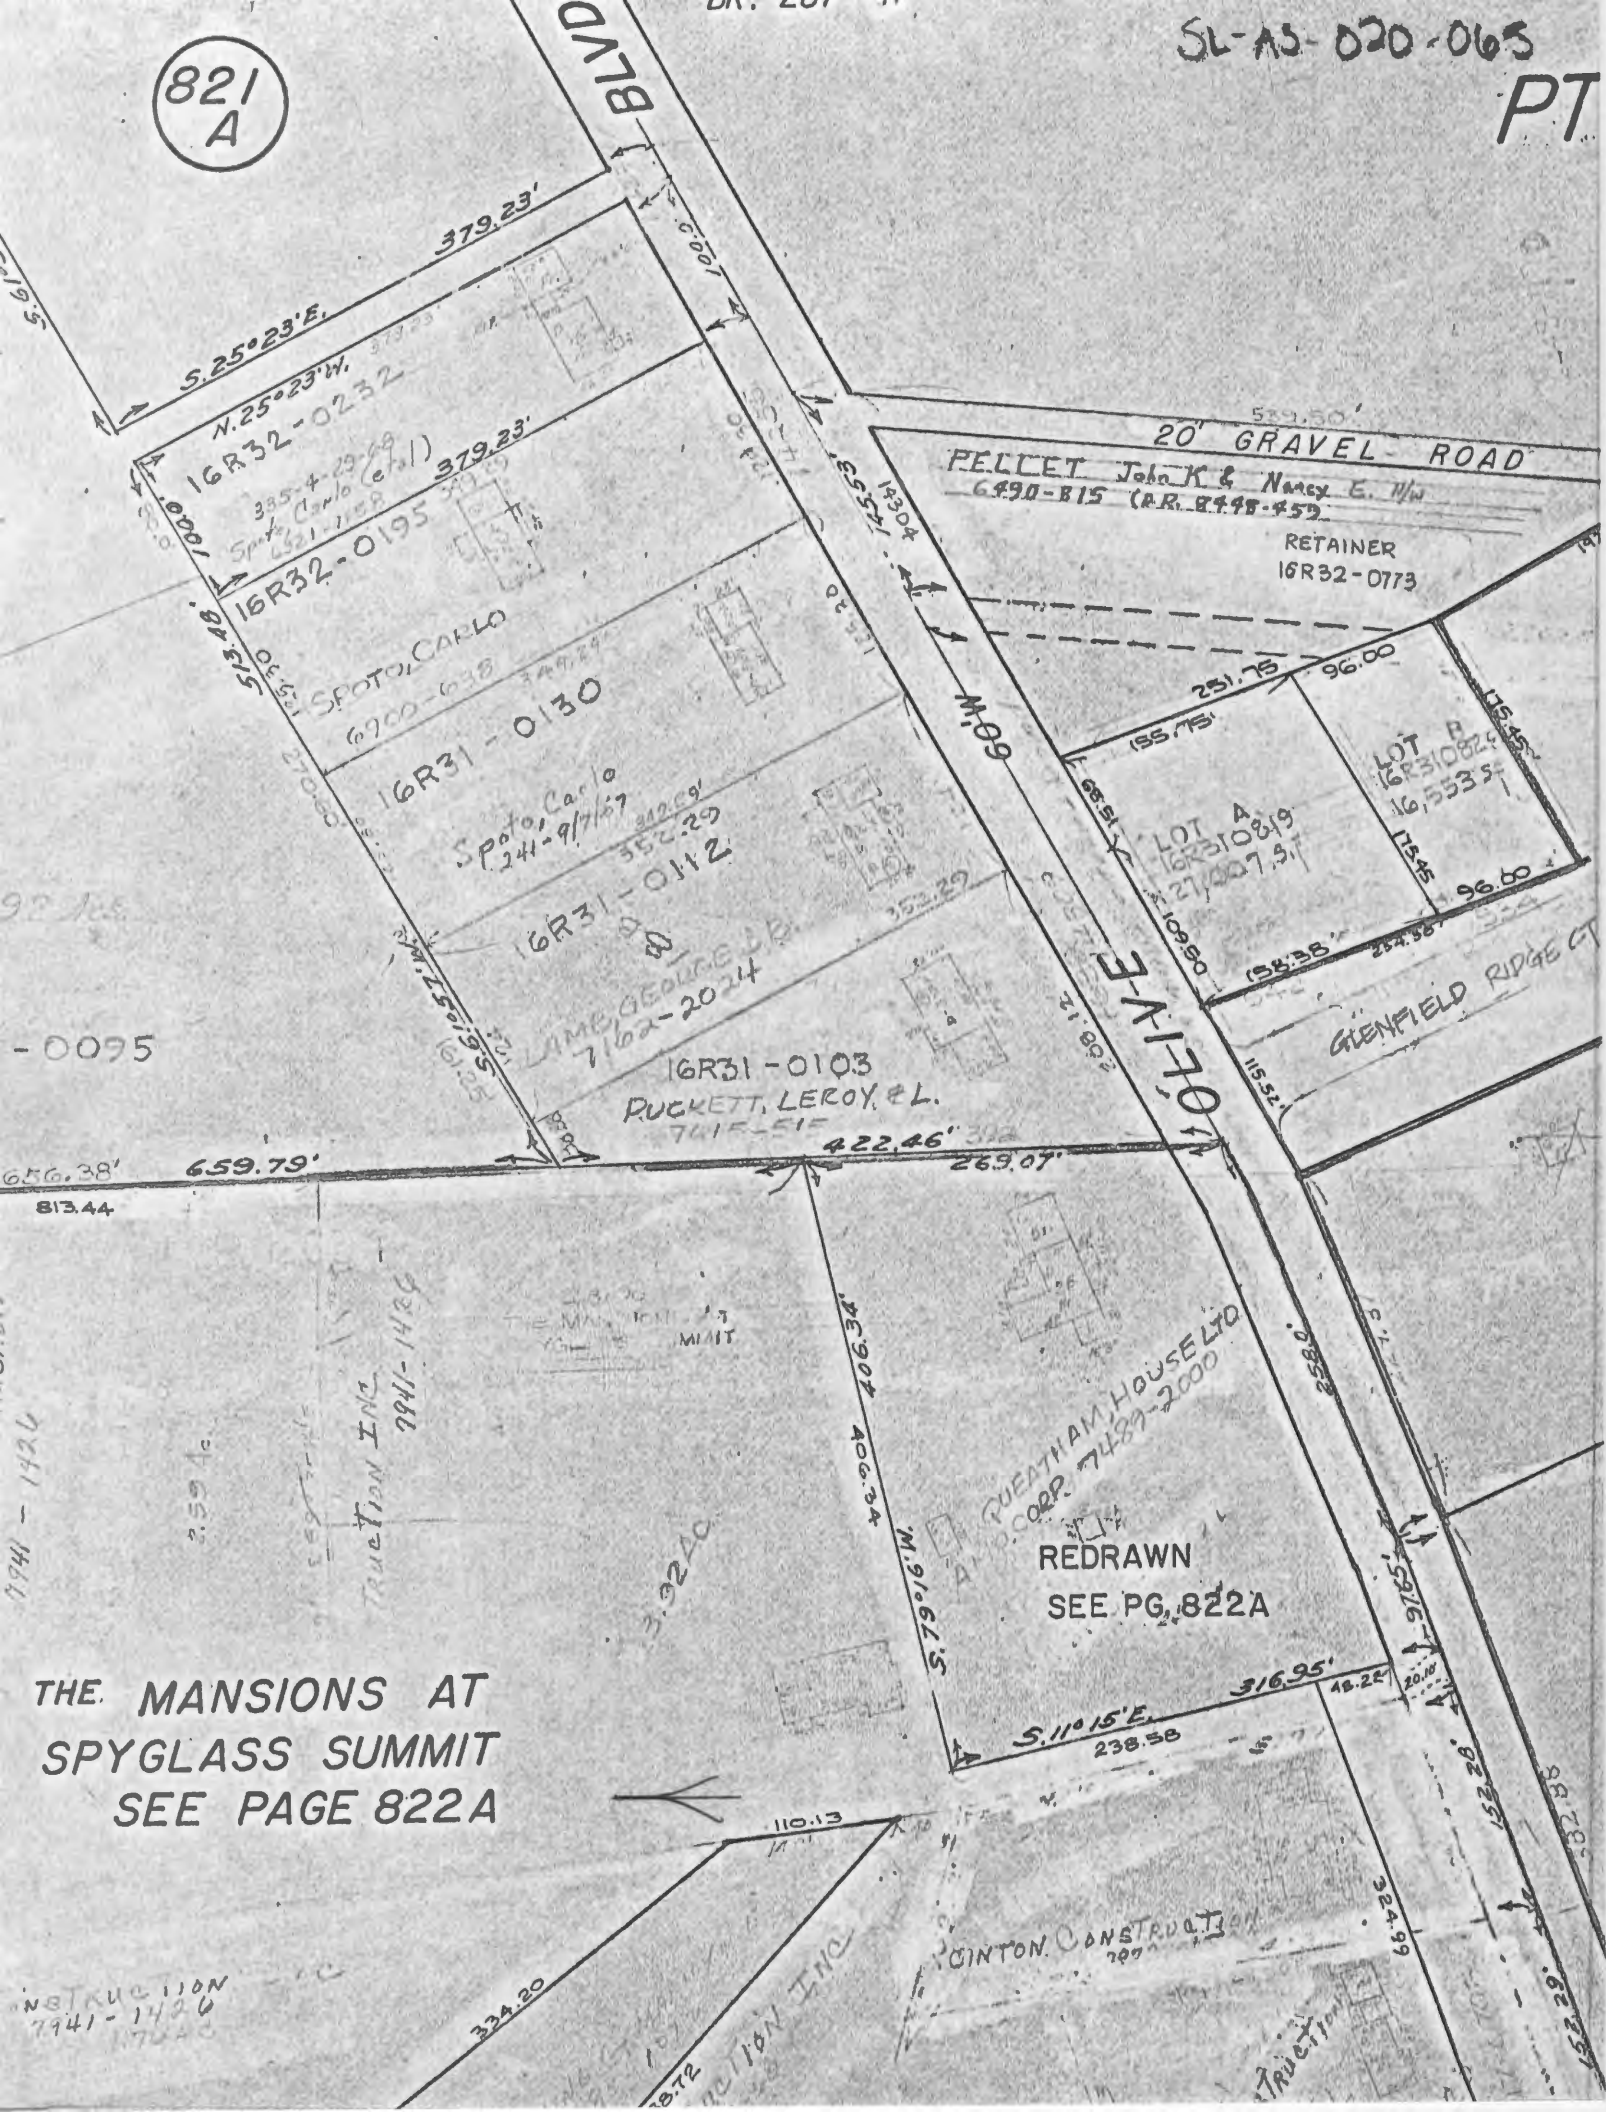



HISTORIC INVENTORY

1 No 16R220105		4 Present Name(s) Ober-Beckemeier Farm House #2		1 No St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 32408-2		14415 Olive Boulevard		
Specific Location 58 acres in Surveys 120 & 206, T46 R4		16. Thematic Category 030 010		2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1880 & earlier		
8 Site Plan with North Arrow		18. Style or Design vernacular 09		
Ober-Beckemeier Farm House #1 030 010 1 1/2 stories c. 1870 wu 15 21 DIA GB 63 Full punch re		19. Architect or Engineer		4 Present Name(s) Ober-Beckemeier Farm
		20. Contractor or Builder		
		21. Original Use, if apparent farm DIA		
		22 Present Use farm		
		23 Ownership Public ☐ Private ☒		
9 Coordinates UTM Lat Long		24. Owner's Name & Address, if known Fred & Minnie Waldmann		5 Other Name(s) 14415 Olive Boulevard
10 Site ☐ Building ☒ Structure ☐ Object ☐		25. Open to Public? Yes ☐ No ☒		
11 On National Register? Yes ☐ No ☒		26. Local Contact Person or Organization		
12. Is It Eligible? Yes ☐ No ☐		27. Other Surveys in Which Included		
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		
15 Name of Established District		28. No. of Stories 2 - 1		Ober-Beckemeier Farm
		29. Basement? Yes ☒ No ☐		
		30. Foundation Material stone 40		
		31. Wall Construction frame wu		
		32. Roof Type & Material gable, comp GB GB 63		
		33. No. of Bays Front 5 Side 3		
		34. Wall Treatment asbestos siding 64		
		35. Plan Shape L		
		36. Changes (Explain in #42) Addition ☐ Altered ☒ Moved ☐		
		37. Condition Interior Exterior poor		
		38. Preservation Underway? Yes ☐ No ☒		14415 Olive Boulevard
		39. Endangered? By What? Yes ☒ No ☐ redevelopment		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road		
		Photo		
42 Further Description of Important Features Typical I-house has two-over-two windows, shuttered on side elevation. The front door is set in frame of sidelights and toplight. Small brick chimneys rise inside ends. The rear wing is only one story high.				
43 History and Significance The old house behind the main one here may go back to the early years of settlement of this region. Part of the tract was acquired by Lucius Lee Bates from R. A. Walton in 1859. It was acquired by Valentine Kesser in the 1870's and sold by him in 1877 to Theodore Kalb, who was acting as trustee for Paul L. Stange. Paul Stange, who lived in St. Louis, sold the property in 1880 to Joseph Ober. Ober and his wife Mary lived here until 1905. Since Stange did not live here, it is likely that the Obers built (continued)				
44 Description of Environment and Outbuildings Immediately behind the main house is a small 1 1/2-story house, two bays by one, covered with unpainted weatherboarding. It has six-over-six windows and working shutters. A tar-paper shed-roofed porch across the front has plain corner posts. The main drive pulls up to the west of the house, and west of the drive are				
45 Sources of Information St. Louis County Probate Court, #27755. St. Louis City Recorder of Deeds, Book 473, p. 268. St. Louis County Recorder of Deeds, Book 11, p. 205; 16, 388; 167, 472; 6502, 1046.			46. Prepared by E. Hamilton	
			47. Organization St. Louis County Parks	
			48. Date 8/89	
			49. Revision Date(s)	

Ober-Beckemeier Farm
14415 Olive Blvd.

43. continued

the main house. August Beckemeier bought this tract of land on Olive in 1905. Ultimately his farm included sixty-four acres on the bluff and seventy-one acres in the bottom. He lived until 1957, when he left the bottom farm to his son Rudolph and divided the bluff farm between his daughters Elsa Hoechst and Minna Waldmann. Mrs. Waldmann inherited this part. This probate records refer to a house of four rooms, which must be a house other than this one, which is larger.

44. continued

several old farm buildings.

SL-AS-020-066

OLIVE

N 73° 10' E

605.484'


N 60° 27' E
132'
N 63° 45' E
151.40'

821

60' W

N 49° 50' E

BOULEVARD







Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY SL-AS-020-067

1 No 17R530120		4 Present Name(s) "The Whitehouse", Jacob Hoefer House		1 No	
2 County St. Louis		5 Other Name(s)			
3 Location of Negatives 32408-9		14710 Olive Boulevard			
Specific Location 2 acres in Survey 120, T45 R4, part of Lot 4, Moss Hunton Lands 7 City or Town II Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow		16. Thematic Category		2 County St. Louis	
		17 Date(s) or Period constructed c. 1882			28. No. of Stories 1½-1½
		18. Style or Design vernacular 49			29. Basement? Yes ☒ No ☐
		19. Architect or Engineer			30. Foundation Material concrete 65
		20. Contractor or Builder			31. Wall Construction frame wu
		21. Original Use, if apparent residence OIA			32. Roof Type & Material GB GB cross gable, comp 63
		22 Present Use residence			33. No. of Bays Front 5 Side irr 3
		23 Ownership Public ☐ Private ☒			34. Wall Treatment 64 asbestos siding
		24. Owner's Name & Address, if known Lily Mae Harlow			35. Plan Shape irregular
		25. Open to Public? Yes ☐ No ☒			36. Changes (Explain in #42) Addition ☐ Altered ☒ Moved ☐
26. Local Contact Person or Organization		37. Condition Interior fair Exterior fair			
27 Other Surveys in Which Included		38. Preservation Underway? Yes ☐ No ☒			
		39. Endangered? By What? Yes ☐ No ☒			
		40. Visible from Public Road? Yes ☒ No ☐			
		41. Distance from and Frontage on Road /574'			
			5 Other Name(s) 14710 Olive Boulevard		
42 Further Description of Important Features Two-over-two windows have working shutters in front, although two of the windows are sheltered by the hip-roofed front porch. Porch has Tuscan columns and plain balustrade. Front roof has three dormers, two with high shed roofs and center one triangular. The rear wing also has shed-roofed dormer with paired windows. Rear porch, facing east, has been enclosed with door and twelve-pane windows.					
43 History and Significance This land was part of the large "Bellemont" estate of Logan Hunton, who lived near Bridgeton on another estate called "Sunnymead" and who died in 1880. Bellemont was referred to in the estate's subdivision as the Moss Hunton Lands because Hunton had acquired it from his father-in-law Dr. James W. Moss. Lots 4, 5 and 6 were sold in 1881 to Jacob Hoefer for \$2,852.28. Hoefer lived until 1910, leaving a wife, a daughter Paulina, (continued)					
44 Description of Environment and Outbuildings House sits on a hill far distant but still visible from the road. It has a small barn and several other outbuildings.					
45 Sources of Information St. Louis County Probate Court, #170, 527, 3216 and 63569. St. Louis County Recorder of Deeds, Book 16, p. 391; 313, 84&86; 332, 329; 425, 259; 1347, 511; 7448, 2080.					
46. Prepared by E. Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)					

"The Whitehouse", Jacob Hoefer House
14710 Olive Boulevard

43. continued

who married Felix Queathem, and a son, Emil. He left his Moss Hunton lands, nearly eighty acres, to Emil, but stipulated that the five acres around the house were to be sold and the proceeds divided. In 1912 the Hoefer heirs did sell the property to W. L. Sellenriek, who lived on nearby White Road.

W. L. and Hannah Sellenriek sold this property to their son Edward G. and his wife Emelia Sellenriek, on December 3, 1913, for \$3,000. Wilhelm died eleven days later. In 1918, Edward and Emelia sold this tract to his brother Albert Sellenriek for \$3,500.

The property was subsequently acquired by Charles Stemme, Sr., who owned a large farm farther east on Olive. He sold it to his daughter Lillian E. Burkhardt in 1935, along with two other parcels. Mrs. Burkhardt, the wife of Raymond Burkhardt, died in 1982, leaving a son Raymond, Jr., and daughters Ferris Tappmeyer (who lived at the historic Tappmeyer Farm at 12525 Olive Boulevard) and Lily Mae Harlow. Mrs. Harlow inherited this property in the division of the estate.

N 70° E

673.79' 0"

353.794



17R530120
HARLOW, LILY MAE
7448-2080
200AC



3916-586
Harlow Lily Mae
17R53-0131

18-6-23-58 384.19

45144.0-301.24
N 87° 50' W
450.92

160.50'

Exchange - 0111, BERTHA M.

17R53-0031



8019-1220

134.40'

14710

OLIVE

831



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-068

1 No 17R420032 2 County St. Louis 3 Location of Negatives 34081-27	4 Present Name(s) Adolphus P. Autenrieth House 5 Other Name(s) 14845 Olive Boulevard	1 No	
6 Specific Location 42.19 acres/Moss Hunton's land, Part of Lot 3 in Township 45 Range 4 7 City or Town If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16. Thematic Category 17 Date(s) or Period constructed c. 1907 18. Style or Design <i>02</i> modified American Foursquare 19. Architect or Engineer 20. Contractor or Builder 21. Original Use, if apparent residence <i>OIA</i> 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24. Owner's Name & Address, if known City of St. Louis 25. Open to Public? Yes ☐ No ☒ 26. Local Contact Person or Organization 27. Other Surveys in Which Included	28. No. of Stories 2 29. Basement? Yes ☒ No ☐ 30. Foundation Material brick <i>30</i> 31. Wall Construction frame <i>WU</i> 32. Roof Type & Material hip, comp <i>HP 63</i> 33. No. of Bays <i>DR</i> Front <i>irr 2</i> Side <i>irr 3</i> 34. Wall Treatment clapboard <i>21</i> 35. Plan Shape <i>irregular</i> 36. Changes <i>porch</i> Addition ☐ (Explain in #42) <i>FU</i> Altered ☐ Moved ☐ 37. Condition Interior Exterior <i>good</i> 38. Preservation Underway? Yes ☐ No ☒ 39. Endangered? By What? Yes ☐ No ☒ 40. Visible from Public Road? Yes ☒ No ☐ 41. Distance from and Frontage on Road	2 County St. Louis
9 Coordinates UTM Lat Long 10 Site ☐ Building ☒ Structure ☐ Object ☐ 11 On National Register? Yes ☐ No ☒ 12. Is It Eligible? Yes ☐ No ☐ 13 Part of Estab Hist Dist? Yes ☐ No ☒ 14. District Potent'l? Yes ☐ No ☒ 15 Name of Established District	42 Further Description of Important Features The roof of house has two pitches, seeming to flair outward around edges. A hip-roofed dormer in front has paired windows and shingled sides. Windows are one-over-one. A hip-roofed porch across the front has square posts with blocky front-facing brackets. It has slat balusters, a narrow band of latticework underneath, and fitted screens. The door is in the west bay making asymmetrical four-bay porch. Right or east bay of front is a bay window. A second bay window is on the east side of the house. 43 History and Significance This land was part of the large farm of Logan Hunton inherited by his son W. Moss Hunton and subdivided by him. Richard and Ellen Bodeler acquired Lot 3, 50 acres, which they sold to George Belger in 1881. Belger died about 1886, and his son Emanuel L. Belger inherited this property. He sold the remaining 46.85 acres in 1907 to Adolphus P. Autenrieth for the large sum of \$5700. By that time a family cemetery was on 44 Description of Environment and Outbuildings The house stands far back from the road in a grove of trees on the west side of a long gravel lane. A smaller more modern house is on the east side of the lane, and behind, at the end of the lane is a modern complex housing the St. Louis County Police Department. On the east edge of the property is a fenced-in area operated by 45 Sources of Information St. Louis County Probate Court, 458 St. Louis County Recorder of Deeds, Book 16, page 410; 204, 49.	46. Prepared by E. Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)	4 Present Name(s) Adolphus P. Autenrieth House
42 Further Description of Important Features The roof of house has two pitches, seeming to flair outward around edges. A hip-roofed dormer in front has paired windows and shingled sides. Windows are one-over-one. A hip-roofed porch across the front has square posts with blocky front-facing brackets. It has slat balusters, a narrow band of latticework underneath, and fitted screens. The door is in the west bay making asymmetrical four-bay porch. Right or east bay of front is a bay window. A second bay window is on the east side of the house.		5 Other Name(s) 14845 Olive Boulevard	

Photo

Adolphus P. Autenrieth House
14845 Olive Boulevard

42. continued

At the back is a shed-roofed porch, also fitted with screens.

43. continued

the property, and it was excluded from the sale. Although the present house might have been built by the Belgers toward the end of their ownership, the general delay in styles reaching St. Louis County suggests that this house was built by Autenrieth. It is indicated in the 1909 county atlas. Autenrieth and his wife Louise owned the property until 1928, when they sold it to the City of St. Louis. The City wanted it primarily for access to its new Howards Bend water pumping station on the bottoms below, and it has been used for that purpose ever since.

44. continued

the City Water Department.

SL-AS-020-068

LOT. 3

17R42-0032
ST. LOUIS, CITY OF
~~4685 AC.~~ 42.19 AC
~~17R42-0010~~
074-17



17R42-0010-75


1006.95

ROAD

PRIVATE ROAD

R=955.37
T=279.52

60'W

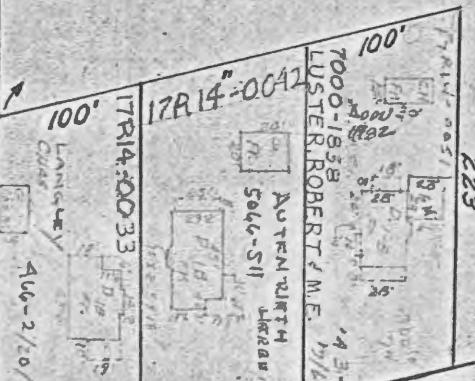

OLIVE

N. 44° 03' E.

520.84'

834



Missouri Office Of Historic Preservation
HISTORIC INVENTORY

P.O. Box 176
 Jefferson City, Missouri 65102

1 No 17R410011		4. Present Name(s) Leicester B. Faust <i>House Estate</i>		1. No. 2. County St. Louis County 3. Location of Negatives 34329-22
2 County St. Louis County		5. Other Name(s) Swastika Farms; Thornhill		
3 Location of Negatives 34329-22				
6 Specific Location 14941 Olive Blvd., 109.12 acres in Survey 157, Township 45, Range 4 East		16. Thematic Category 030 010		2. County St. Louis County 4. Present Name(s) Leicester B. Faust Estate 5. Other Name(s) Swastika Farms; Thornhill
7 City or Town If Rural, Township & Vicinity Missouri River Township, Chesterfield		17. Date(s) or Period constructed c. 1918		
8 Site Plan with North Arrow <i>Sign person Leicester B. Faust</i>		18. Style or Design Pueblo Revival 57 19		
		19. Architect or Engineer Tom P. Barnett Co.		
		20. Contractor or Builder		
		21. Original Use, if apparent residence, farm		
		22. Present Use residence, farm		
		23. Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Mrs. Leicester Busch Faust 14941 Olive Blvd.		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization Virginia Stith, St. Louis Co. Park		3. County St. Louis County 4. Present Name(s) Leicester B. Faust Estate 5. Other Name(s) Swastika Farms; Thornhill
10 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included St. Louis County Historic Buildings Survey 1977-78 (unpublished)		
11 On National Register? Yes ☐ No ☒		28. No. of Stories 2		
12 Is It Eligible? Yes ☐ No ☐		29. Basement? Yes ☒ No ☐		
13 Part of Estab. Yes ☐ Hist Dist.? No ☒		30. Foundation Material concrete (?) 01		
14. District Potent? Yes ☐ No ☒		31. Wall Construction tile (?) UD		
15 Name of Established District		32. Roof Type & Material flat Ft 01		
		33. No. of Bays Front irreg. Side irreg.		
		34. Wall Treatment beige stucco 61		
		35. Plan Shape irregular		
		36. Changes (Explain in #42) Addition ☒ Moved ☐		
		37. Condition Interior excellent Exterior excellent		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? Yes ☒ No ☐ By What? road widening		
		40. Visible from Public Road? Yes ☐ No ☐		
		41. Distance from and Frontage on Road 650'/800'		
42 Further Description of Important Features Main house has many Pueblo Revival features, including slightly battered corners, doors and windows inset into openings with rounded corners, flat roof with parapet. One story east and south wings form terraces for second floor, accessible through French doors. Large service wing extends to northwest. Casement windows and most doors have dark frames; main door to south garden is Gothic arched.				Photo
43 History and Significance The first eighty acres of this estate, which ultimately encompassed several hundred acres, were purchased July 5, 1917, from the heirs of Henry Jackson. The buyer was Edward A. Faust, the father of Leicester Busch Faust, who was still a minor, born December 22, 1897. The deed of sale specified that, although the Jacksons were to remain in possession of the property until November, new improvements (continued on page 2)				
44 Description of Environment and Outbuildings In addition to the main residence, the property includes a secondary residence, a large garage, and several barns; most were also designed by Tom Barnett to harmonize with the main house. The main entry on Olive Boulevard consists of two stone quadrants about 30 inches high. The east one (continued on page 2)				
45 Sources of Information Withey, Dictionary of American Architects (Deceased), pp. 37-39. St. Louis Post-Dispatch, "Tom Barnett's Ashes Will Be Buried in Native City, St. Louis," September 25, 1929. (continued on page 2)				46. Prepared by Esley Hamilton 47. Organization St. Louis County Parks 48. Date 7/86 49. Revision Date(s)

Leicester B. Faust Estate
Swastika Farms; Thornhill

43. continued

might be constructed by the Fausts immediately, and it is likely that work did start before the end of the year. By 1919 the new house and at least three of the outbuildings were standing. They were all designed by Tom P. Barnett (1870-1929), the son of George I. Barnett (1815-1898), who had been the most prominent architect in nineteenth-century St. Louis. Tom trained in his father's office and later joined his brother George D. in the firm of Barnett, Haynes and Barnett. Although not the most prolific firm in St. Louis, they designed some of the most prominent and admired buildings, including the new St. Louis Cathedral, the old Visitation Convent (now demolished), Temple Israel and the gate at Kingsbury Place. Their large houses in the Central West End included the grandest of all, #1 Portland Place, built in 1910 for Edward A. Faust and his wife Anna Louise Busch. In 1912 Tom P. Barnett formed his own company, which designed the huge ballroom at the rear of the Faust house as well as many other notable buildings, including the Arcade Building, Eden Seminary in Webster Groves, and the Christian Science Church and Anchor Masonic Temple flanking the pylons in University City (all listed in the National Register). He was also a painter. Barnett was probably the most skilled and versatile eclectic architect ever to work in St. Louis, and his designs for Leicester Faust's farm are among his most unusual. They are possibly unique examples in this part of the country of the Pueblo Revival style. This style derives from the Native American pueblos and early Spanish Colonial buildings of the American southwest. It began to be revived, particularly in Santa Fe and Taos, after the turn of the century, when eastern artists and vacationers (including some notable St. Louisans) rediscovered that regional culture. The style is characterized by earth-colored stucco walls, battered buttresses, flat roofs with parapet walls, projecting wooden roof beams (called vigas) deepset openings and slightly irregular rounded edges.

Leicester Faust (in his youth called L. Busch Faust) named the estate "Swastika Farms" after the broken cross pattern found in Hopi and Pueblo art; the Chesterfield Farmers' Elevator and Supply Company of which he was president manufactured Swastika Brand Flour. In the 1930's after the name and symbol had become identified with the Nazi Party in Germany, the name of the estate was changed to "Thornhill," which had been the name of the property when it was the home of Missouri's second governor Frederick Bates. (In 1968 Mr. & Mrs. Faust gave 98 acres of their farm, including the original Bates house, to St. Louis County, and the house has now been restored to its original appearance.)

Leicester Faust was best known in his youth for his grandfathers Tony Faust and Adolphus Busch. Anthony Edward Faust, better known as "Tony" (1836-1906), began his distinguished career as a restaurateur in 1862. By the 1890's Faust & Sons Oyster and Restaurant Company was one of the best-known institutions in St. Louis. Faust also founded the Fulton

Market Company, purveyors of seafood, in 1879; his elder son Edward A. (1869-1936) served as its president. In 1897 Edward married Anna Busch Faust (c. 1875-1936), the youngest daughter of Adolphus Busch. He was the founder of the Anheuser-Busch brewery and architect of its great growth in the later nineteenth century. After his marriage Edward Faust became a vice-president and director of Anheuser-Busch, positions which his son later assumed.

On January 14, 1922, Leicester Faust married Mary Plant (born Nov. 10, 1900). She was the daughter of Samuel Plant (1872-1953) and Clara Ewing (1877-1971). He was the scion of an old milling family that had also been involved in the earliest days of railroading. She was a descendant of Pierre Laclede, the founder of St. Louis. Their residence at 800 Cella Road in Ladue is listed in the National Register of Historic Places.

Following their marriage, Leicester and Mary Faust enlarged the main house considerably, and other improvements were made over the years, including the lush landscaping of what had been a virtually bald site. In addition to his work for Anheuser-Busch, Mr. Faust headed the Grain Exchange in 1942 and the Merchants Exchange in 1945. He was an active supporter of the Red Cross and after his retirement in 1952 devoted much time to the Missouri Botanical Garden. He and Mrs. Faust donated several major works of art to the St. Louis Art Museum and Washington University. The Fausts had two daughters, Lily Claire (born 1923), who married Henry Keeler (another descendant of Pierre Laclede), and Ann Wilhelmina (1927-1975), who married William W. Spivy. Leicester Busch Faust died in 1979.

44. continued

(on the right as you enter the property) terminates toward the center in a round-topped bollard-like structure. The other one has a much larger cylindrical structure, large enough to stand in, with a similar domed top. Hanging from this structure is a cut out metal sign depicting the buildings of the estate with the word "Thornhill." The largest barn measures 50 by 100. It has a complex wooden roof structure that spans the entire space without intervening supports, a structural system apparently related to that of the St. Louis Arena.

45. continued

Watchman-Advocate, History of St. Louis County, (1919), p. 94.

Virginia & Lee McAlester, A Field Guide to American Houses (1984), pp. 434-437.

Mary B. Cunningham and Jeanne C. Blythe, The Founding Family of St. Louis (1977).

Missouri Historical Society, Necrology Scrapbooks E, p. 57, 18, p.50, 32, pp. 89 & 95; Moses P. Greenfelder Diary, July 7, 1917.

Faust Estate;Swastika Farms;Thornhill

3 of 3


St. Louis Post-Dispatch, "Leicester B. Faust Funeral; was Anheuser-Busch Official," Sept. 2, 1979.

St. Louis Globe-Democrat, "Leicester B. Faust funeral today," Sept. 3, 1979.

St. Louis County Recorder of Deeds, Book 412, page 174.



Illustration from Tom Barnett Scrapbook, collection of St. Louis County Dept. of Parks & Recreation

SL AS-020-069

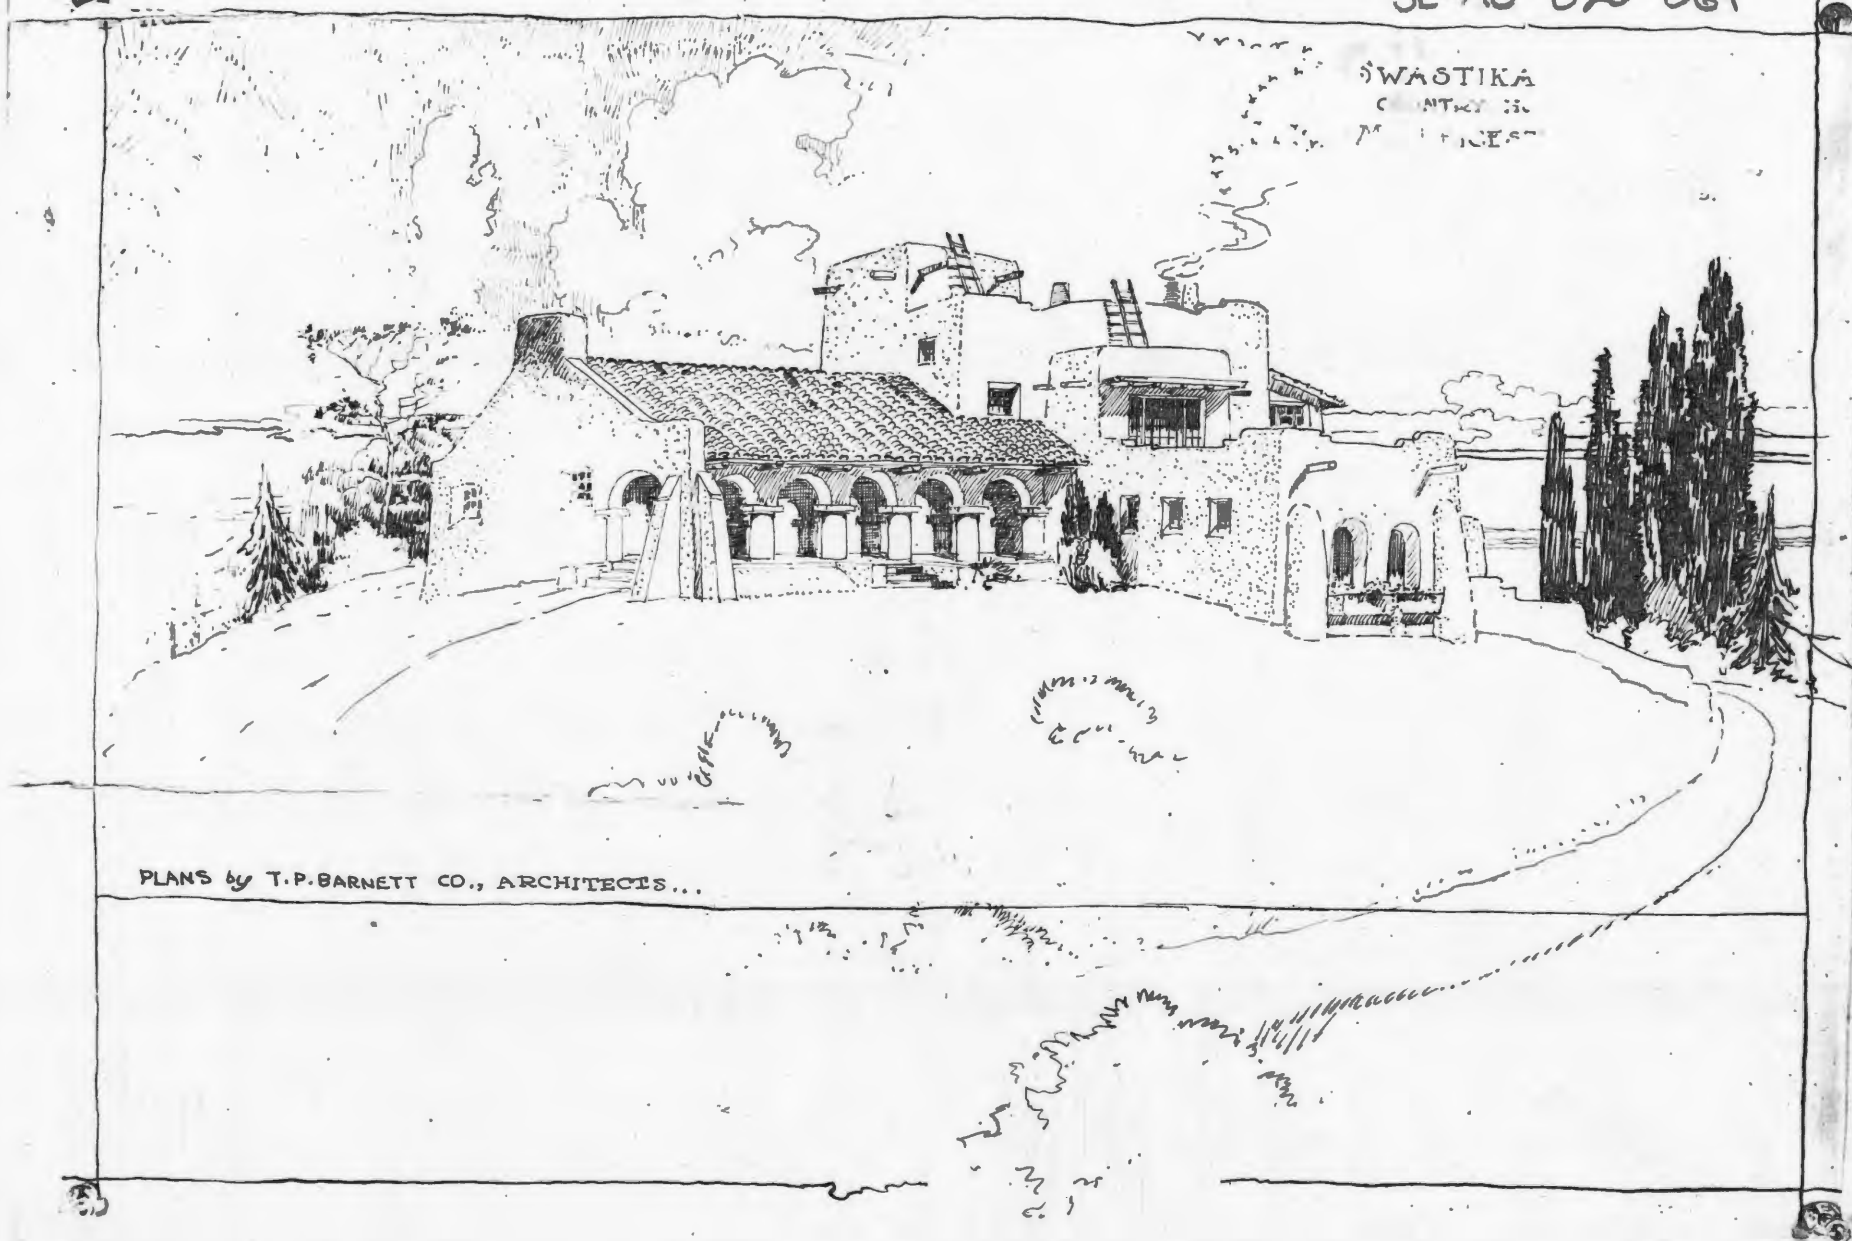


LOT 1 ON THE HILLS
FREDERICK BATES ESTATE PARTITION
U. S. SURVEY 157
T. 45 N., T. 4 E.
ST. LOUIS COUNTY, MISSOURI

SL-AS-020-069

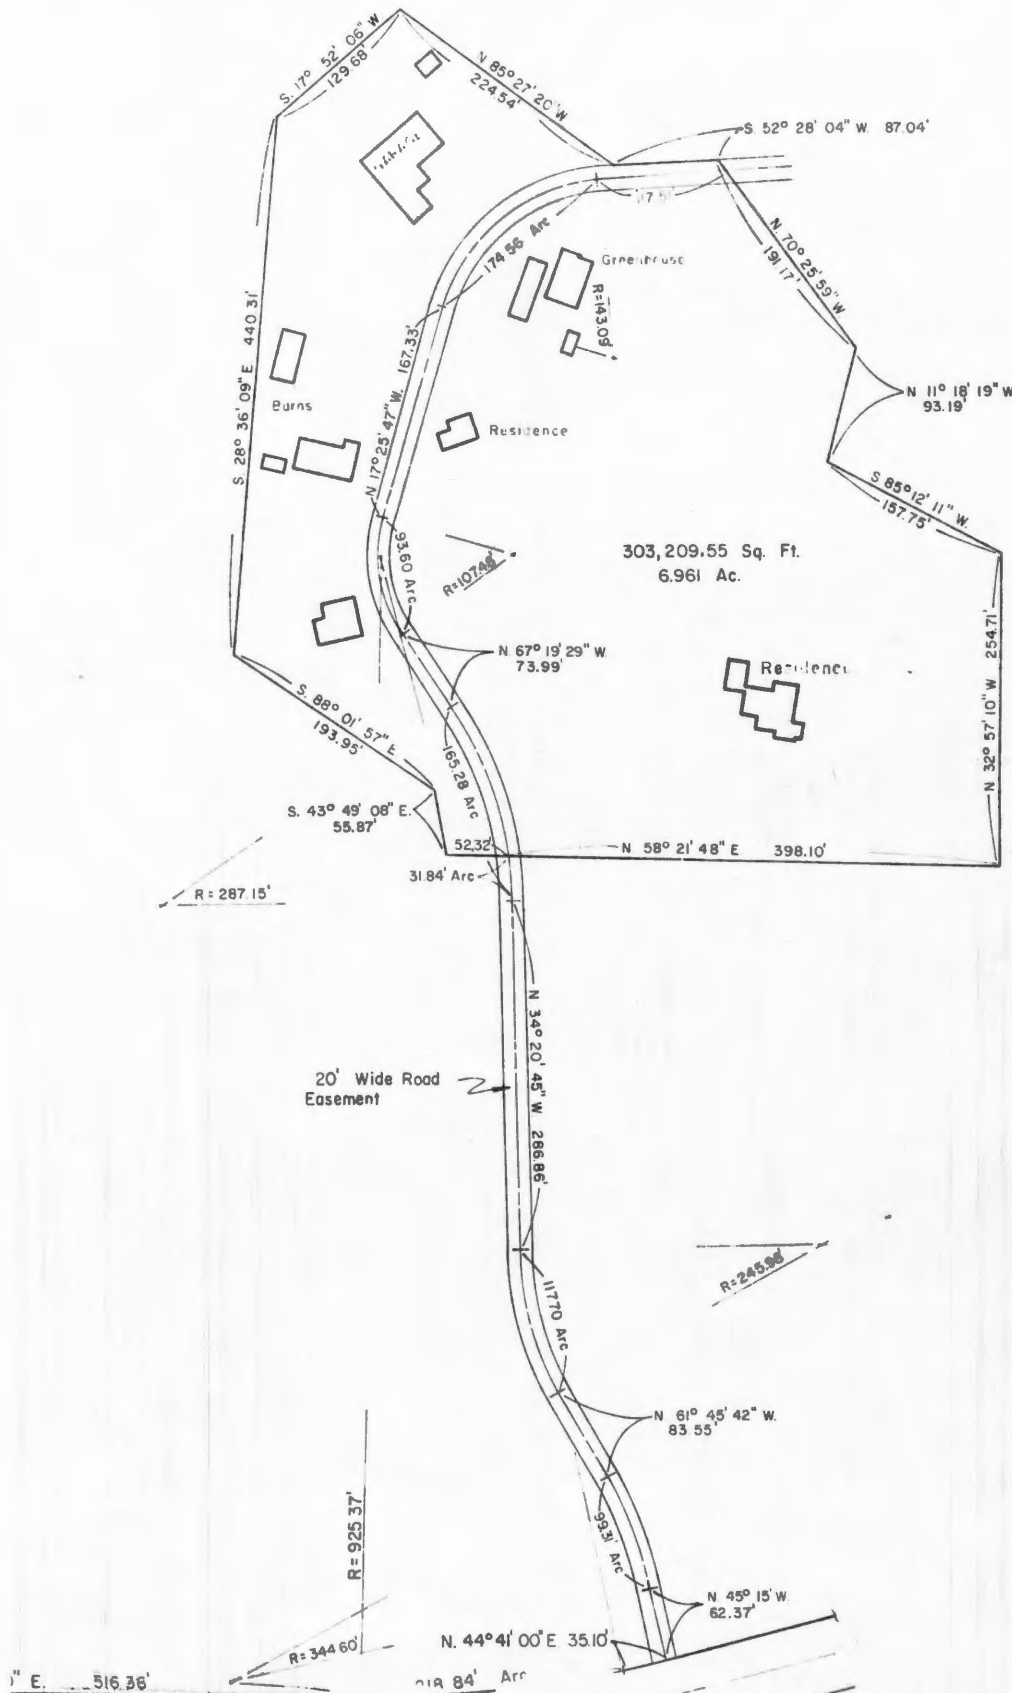

EARLY HISTORY

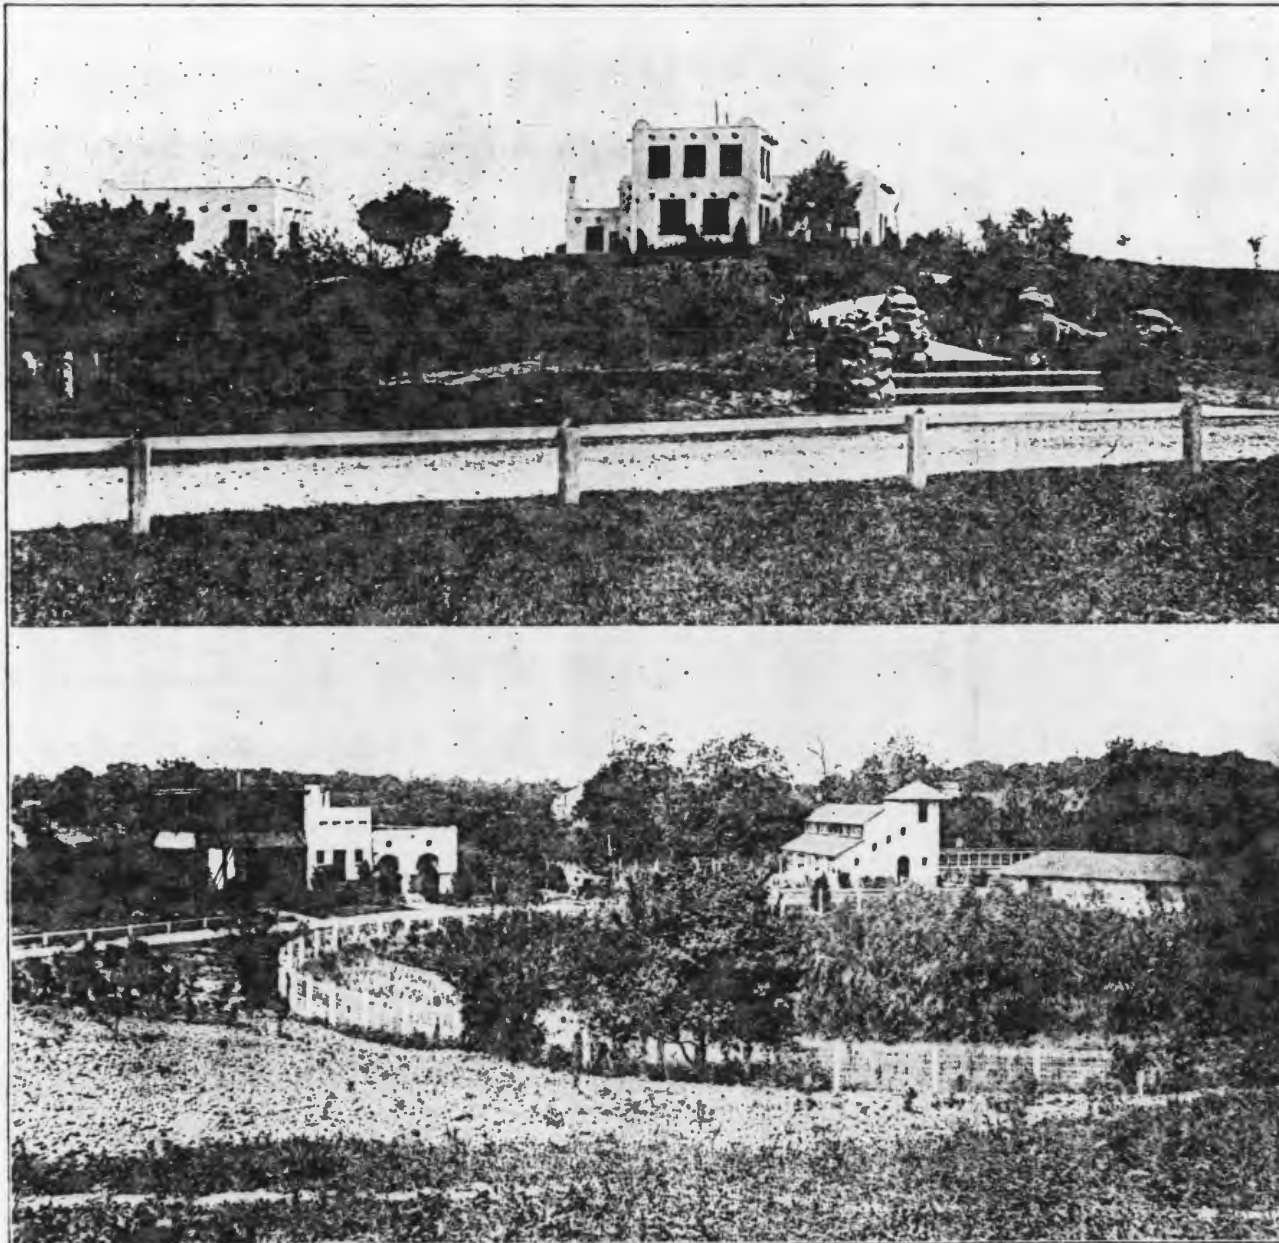

L. BUSCH FAUST RESIDENCE AND FARM

L. BUSCH FAUST

Several corporate interests feel the stimulus of the activity and enterprise of L. Busch Faust. He passed beyond that stage where business is experimental but has not yet reached the

plant numbers among its various products the high-grade and popular Swastika Brand Flour. In addition to this enterprise, Mr. Faust has charge of a 100-acre farm utilized for his stock-raising industry. The tract oc-

all his industrial efforts, as he is a stockholder in many other important enterprises.

Mr. Faust resides in a handsome residence at Chesterfield and he is considered one of the most progress-

Louis County, none appear more thoroughly capable of advancing his position in commercial life than Peter Mercurio, proprietor of a grocery and meat market, Olive Street road and Bonhomme road, Clayton rural route No. 2. His system of handling the business and his method of catering to his trade give indication of the years he spent in the industry and the practical knowledge resulting from this long experience. The groceries and meats are the best on the market any place, and these with the courteous service and fair prices appeal to a patronage which extends over a radius of six miles.

Mr. Mercurio was born January 22, 1882, and is a son of that veteran and popular St. Louis grocer, Joseph Mercurio. The public and parochial schools of his native city provided his book learning, and the store conducted by his father supplied the practical knowledge, which elements together with an honest and progressive character developed the excellent business man who, in 1909, started in the grocery business for himself at Ninth and Franklin avenue. He ran this store until 1917, when he bought the property on Olive Street road, comprising two acres. His progress here has been rapid, and improvements are continually being made. In addition to the grocery store he also conducts an ice cream parlor.

On January 7, 1909, Mr. Mercurio took in matrimony as his companion and helpmate, Miss Cecelia Strehle. She was born in St. Louis August 16, 1888, a daughter of Caspar Strehle. The union has been blessed with four children, namely: Joseph K., born October 19, 1909; Paul, born July 19, 1913; John V., born February 14, 1918; Kathryn F., born January 22, 1915. The family is highly respected and esteemed by a large circle of friends and acquaintances.

ERNST MAILE.

Doing business under the motto, "Only the Best of Everything," has earned Ernst Maile, the Olivette grocer, a lasting reputation and a profitable patronage. His store is modernly arranged and presents a stock of

prime of life, being still in college, so that the possibilities of a broadening scope are good. What he undertakes he carries forward to successful completion, and he displays notable judgment in placing value upon an opportunity or a business condition. He is now connected with several important business concerns, and the time not spent in studying is devoted to his commercial and stock-raising enterprises.

L. Busch Faust, descendent of a notable St. Louis family, was born December 22, 1897. He is a son of Edward A. Faust, and his mother is a member of the well-known Busch family, whose interests in the largest brewing and beverage manufacturing concern in the world have made them famous in the commercial life of the United States. L. Busch Faust has enjoyed the best of educational advantages, having studied at Smith's Academy in St. Louis, later at Yale, and now being a law student at Washington University. He is already far advanced in the study of his chosen profession, and will be a 1921 graduate.

Although still in college life, Mr. Faust could not bridle his ambitions to participate in industrial pursuits, and while still reading school books assumed the responsibilities of important positions incident to the enterprises with which he is connected. He dates the beginning of his industrial career in 1919, when the Chesterfield Farmers' Elevator & Supply Company was established at Chesterfield, Mo. This is a large and rapidly growing concern and fills a long-felt need in that section of the county. Its staff of officers is made up as follows: L. Busch Faust, of this review, president; Adolph Autenrieth, vice-president; John P. Busch, secretary; Edward Burkhardt, treasurer. The

cupies a high location and is one of the most beautiful spots in St. Louis County. It is improved with all modern buildings, and under the direction of its industrious and highly efficient manager, is a successful and prosperous enterprise, constituting one of the most prominent stock farms in this section of the country. The activities of Mr. Faust in the elevator and on his stock farm do not occupy

ive and popular residents of St. Louis County. His associations in business and social circles have won him a large and admiring acquaintance, included in which are the most prominent people in this section of the county.

PETER MERCURIO

Inhabiting the large colony of successful young business men of St.

lancy and staple groceries and choice meats. He maintains an excellent delivery system and supplies goods within a radius of three miles. He is polite and accommodating in waiting on his trade, and his prices, judging from the large volume of business he does, are satisfactory.

Mr. Maile is a native of Wuerttemberg, Germany, and was born July 7, 1872. After leaving the schools of his country he came direct to America, and from the port of his landing immediately came to St. Louis County. His first employment was in the grocery and butcher business, and after thoroughly acquainting himself with all the elements governing this industry, began an independent career. He opened a butcher shop at Olivette in 1898, and instead of waiting for the business to come to him he went out after it, by inaugurating a "meat route," which extended over a radius of ten miles. He made frequent canvasses and did a profitable business. In 1904 he bought the building and property he now occupies. Being of the go-ahead type, he is continually adding improvements to his property and new features to his business. He takes an active interest in the life of the community and is always ready and willing to give assistance to a movement beneficial to industrial and social conditions.

In the year 1898 Mr. Maile was united in the holy bonds of matrimony with Miss Bertha Kruegel, a daughter of the late August Kruegel a resident of Illinois, whose death occurred August 30, 1903. Her mother died October 23, 1904. Mrs. Maile was born April 20, 1876, and after the death of her parents came to live in St. Louis County. The union has been blessed with two children—Ernest R., born August 5, 1907, and Anna C., born July 8, 1900.



ERNST MAILE MARKET

SL-AS-020-069



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-070

1 No		4 Present Name(s) Conway House		1 No	
2 County St. Louis		5 Other Name(s)			2 County St. Louis
3 Location of Negatives 02478-3 & 34329-15					
6 Specific Location Faust Park 15185 Olive Boulevard		16. Thematic Category		4 Present Name(s) Conway House	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1864			
8 Site Plan with North Arrow		18. Style or Design vernacular 09			
		19. Architect or Engineer			
		20. Contractor or Builder			
		21. Original Use, if apparent residence OIA			
		22 Present Use vacant			
		23 Ownership Public ☒ Private ☐			
		24. Owner's Name & Address, if known St. Louis County Dept. of Parks and Recreation 41 S. Central Ave. 63105			
		25. Open to Public? Yes ☐ No ☒			
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		5 Other Name(s)	
10 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included			
11. On National Register? Yes ☐ No ☒		28. No. of Stories 2			
12. Is It Eligible? Yes ☐ No ☐		29. Basement? Yes ☒ No ☐			
13 Part of Estab Hist Dist.? Yes ☐ No ☒		30. Foundation Material 40 stone faced concrete			
14. District Potent'l? Yes ☐ No ☐		31. Wall Construction frame wood			
		32. Roof Type & Material gable, comp. GB 63			
		33. No. of Bays Front 5 Side blank			
		34. Wall Treatment clapboard 21			
		35. Plan Shape rectangular			
		36. Changes (Explain in #42) Addition: Altered ☒ Moved ☒ 1986			
		37. Condition Interior fair Exterior fair			
		38. Preservation Underway? Yes ☒ No ☐			
		39. Endangered? By What? Yes ☐ No ☒			
		40. Visible from Public Road? Yes ☒ No ☐			
		41. Distance from and Frontage on Road			
42. Further Description of Important Features The front of the Conway House currently has an unusual arrangement of five bays on the first floor but only three on the second, the corresponding second and fourth bays being blank. There is evidence that windows once occupied these two positions. Windows are 6-over-6. The entry has blank panels covering the sidelights. The rear elevation has a blank center bay and the ends of the house are also blank. The house had asbestos siding before the move, but that has all been removed. A one-story				Photo	
43 History and Significance The Conway House sits on ground that was granted to John Long by the Spanish Colonial Government in 1797 and confirmed after the Louisiana Purchase as Survey 415. Long figures in St. Louis County history as one of the earliest Anglo settlers. Born in Port Royal, Virginia, in 1755, he fought in the American Revolution and later commanded a merchant ship between Philadelphia and Liverpool. He had four children by his marriage to Elizabeth Bennet in 1782. His daughter Isabella married Captain James Mackay, another					
44 Description of Environment and Outbuildings The Conway House is one of a group of historic Chesterfield houses that have been gathered in Faust Park to form a village. Also in the park are the St. Louis Carousel and Thornhill, the home of Missouri's second governor.					
45 Sources of Information As noted in 43. Anne Blackman, "History Transported," Clayton Citizen-Journal, January 21, 1987. On-site inspection.				48. Prepared by Esley Hamilton	
46. Organization St. Louis County Parks					
47. Date 7/89 49 Revision Date(s)					

Conway House
15185 Olive Boulevard

42. continued

shed-roof rear vestibule was also left behind. Inside the house are a few pieces of interesting woodwork, including the staircase balustrade. It has brick chimneys inside the ends. Based on the evidence found so far, it seems that the front door had a toplight raising it to the height of the windows, and that a front porch was either two stories high or had a balcony reached by a center door on the second floor. All these changes suggest that the clapboards uncovered in the move are either not original or have been extensively reworked.

43. continued

important early settler, while son William Lindsay Long built both White Haven and the Long Log Cabin on Pardee Road and founded the town of Fenton. Mackay owned a large tract on the Gravois, and John Long settled there in 1807. He died in 1826 and is buried in the Sappington Cemetery in Crestwood.

Survey 415, said originally to encompass 680.56 acres, was part of the so-called Bonhomme Settlement. John Long sold 650 arpents (an arpent is about .8 acre) in 1812 to John Cunningham for \$1,000. (City Recorder of Deeds Book D, page 188). Cunningham, about whom little has been found, continued to live in the area after selling 600 arpents of his tract in 1817 (price \$1,400 Book F, p. 244) because he is known to have helped purchase land for the first building of the Bonhomme Presbyterian Church in 1819.

The buyer in 1817 was Stephen Lanham. Two years later he sold 174 acres to his brother Hartley for \$790 (Book H, p. 297). The deed describes this tract as "the improved part of the land that Stephen Lanham bought of John Cunningham and same that Hartley Lanham now lives on, laying on the waters of the Creve Coeur." This statement demonstrates that a house was already standing on this site, and given the effort required to clear the land, implies that development may have been started by Cunningham.

The Lanham brothers were married to sisters, Stephen to Mary (called Polly) Cordell and Hartley to Harriet Cordell (1783-1841). They were the daughters of the Reverend John Cordell II (1749-1799) and Judith Blackwell (1753-1842). Cordell's 1897 land grant had been confirmed by the U.S. government to his widow. The part of the property retained by Stephen was the site of the Davis House, which has also been moved to Faust Park.

In 1828 Hartley Lanham sold his 174 acres to John S. Ball for \$1,800 (Book O, p. 392). This price assures that the farm was by then fairly well developed. Ball was married to Ann Price, the half-sister of Mrs. Lanham,

the daughter of Judith Blackwell by her first husband, Burnett Price. Ball had come to St. Louis County in 1815 after service in the War of 1812. His daughter from an earlier marriage, Nancy Opie Ball (1802-1877), married Frederick Bates in 1819 and lived with him at Thornhill, his home across Olive Street Road from this farm. They had three children before Frederick's death while serving as Missouri's governor, August 4, 1825. A fourth child, Frederick, Jr., was born February 1, 1826. The Lanham farm would have enabled Ball to be close to his widowed daughter and her small children. In 1832, the year after her marriage to Dr. Robert C. Rubey, Ball sold this farm. Ball was ordained a minister ("evangelist") in the Bonhomme Presbyterian Church in 1825 at the age of 51. He died in 1849.

The buyer in 1832 was George Collier, who paid \$1,350 for 174 acres (Book S, p. 485). Several personages by this time appear in St. Louis history, the best known being the man who founded St. Charles College in 1835 and died in 1852. Other references to George Collier (perhaps different people) mention a business partnership with William B. Pettus in 1838, construction of St. Louis's first five-story building in 1850, ownership of a white lead factory near Chouteau's pond and of the entire city block bounded by Fourth, Fifth, Locust and St. Charles. A George Collier who had his portrait painted by Samuel F. B. Morse, had six sons and a daughter who married Henry Hitchcock, another well-known St. Louisan. This person or persons are unlikely to have farmed or even lived this far from town. The purchase may have been an investment intended to be farmed by a tenant.

Collier kept the property only four years, selling on January 17, 1836, to Edward W. Herrington (Book A², p. 126). A week later Herrington, another St. Louis businessman, sold to Presley Cordell for \$2,000 (Book V, p. 390). Cordell, born in 1779, was the son of George Edwards Cordell and first cousin of Mary and Harriet Cordell Lanham. Presley Cordell and his wife Amelia Conner hosted many meetings of the Bonhomme Presbyterian Church, including the inauguration of the subscription drive to finance the new church building of 1841, which is still standing. A photo showing a dilapidated log house was published by Thomas in 1911 as the home of Presley Cordell, but it may actually have been a quarter for slaves.

The Cordells sold this property, now increased to 204 acres, on April 30, 1849, to J. B. Gamble receiving \$3,500 (Book A⁵, p. 340). They moved to the city, where they died a few months later in the great cholera plague, the same one that claimed William Lindsay Long and his wife.

Joshua Barton Gamble was the son of Archibald Gamble, a prominent St. Louis attorney and businessman. George C. Sibley recorded in his commonplace book on August 2, 1949, "Mr. and Mrs. Archibald Gamble returned after dinner to Bonhomme, where they are staying (all the family) at their son's Barton Gamble." The following year J. B. Gamble sold the property to his father, but he may have continued to live there. By 1861 he was at House Springs in Jefferson County. Archibald Gamble (1791-1866) had come west from Winchester, Virginia, in 1816 and had played an

Conway House

3 of 3

important role in the early development of St. Louis as Clerk of the Circuit Court and Recorder of Deeds for eighteen years. Mrs. Gamble was Louisa Easton, a daughter of Col. Rufus Easton, another leader of early St. Louis. Gamble's youngest brother, Hamilton Rowan Gamble (1798-1864) served as Missouri's Secretary of State under Governor Bates and was the state's Civil War governor.

On February 12, 1855, the farm was purchased by Eliza Clarkson, the wife of John M. Clarkson, but the following March 13 and the Clarksons sold to Frederick Bates, Jr. The same 209 acres was now valued at \$7,000.

Frederick Bates, Jr., was (as we have seen) the posthumous son of the former governor and the grandson of the former owner of this property. He married Lavinia Meredith but died in 1862, leaving an infant son, Woodville. An inventory made at that time gives a fairly clear picture of the house and its furnishings. Lavinia Bates soon married Samuel Conway, a son of Joseph Conway who had settled in the area in 1797. He had nine children by a previous marriage, including Dulcina Conway, who was the wife of Lucius Lee Bates, an older brother of Frederick, Jr. Lavinia thus became her sister-in-law's stepmother. Samuel Conway sold some of his property to Conrad Krews in 1864. It is possible that he rebuilt his wife's old house at that time, which would explain the name Conway traditionally given to the house. Samuel's house was located on Conway Road where the Conway Day School was later built. They had one child, a son, Meredith. Samuel Conway died in 1870, and by 1878 Lavinia had married Benjamin F. Kenney.

The deaths of neither Lavinia Bates, Woodville Bates, nor Meredith Conway are recorded in St. Louis County, but by 1918 Benjamin F. Kenney and sons William and Benjamin, Jr., were all living in California (County Recorder of Deeds, Book 428, p. 136). The property was leased to tenants from before 1910, the year tenant Daniel Mertz moved out. The family retained the 209 acres until 1927, however, when Benjamin Kenney, Jr. finally sold to Felix Queathem (Book 824, p. 331). He was the son of Felix Van Queathem, who came to St. Louis County from Belgium in 1857. Felix Jr. lived at 14319 Olive Street Road in the community of Lake, a larger house than this one overlooking the Missouri River, and now a County Landmark; presumably he leased this farm to tenants. In 1940 he sold it to Leicester Busch Faust and his wife Mary Plant Faust, who lived across the street on the large estate that Faust had created in 1917 out of the former Thornhill property and adjacent farms. Faust (1898-1979) was the grandson of Adolphus Busch of the Anheuser-Busch brewery and also of Tony Faust, a well-known restaurateur. Mr. and Mrs. Faust later gave the land for Faust Park to St. Louis County. Mrs. Faust is the daughter of Samuel Plant, whose house at 800 Cella Road is listed on the National Register. She is a descendant of Pierre LaCledé, the founder of St. Louis. She offered this house to the County Parks Department in 1986, after the Mertz Log Cabin was moved to Faust Park. Mrs. Faust donated the house to form part of the Faust Park village. It was moved on December 23 that year. Restoration is currently under way.



HISTORIC INVENTORY

SL-AS-020-071

1 No		4 Present Name(s) Lanham-Townsend-Albrecht House		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 32354 & 34329-11		Davis House, Faust Park		
6 Specific Location Faust Park 15185 Olive Boulevard		16. Thematic Category		2. County St. Louis 4. Present Name(s) Lanham-Townsend-Albrecht House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c.1820,c.1855 & later		
8 Site Plan with North Arrow		18. Style or Design Vernacular 09		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence 01A		
		22 Present Use vacant		
		23 Ownership Public ☒ Private ☐		
		24. Owner's Name & Address, if known St. Louis County Dept. of Parks and Recreation 41 S. Central Avenue 63105		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		
10 Site ☐ Structure ☐ Building ☒ Object ☐		27. Other Surveys in Which Included		
11. On National Register? Yes ☐ No ☒		12. Is It Eligible? Yes ☐ No ☐		
13 Part of Estab Hist Dist.? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☐		
15 Name of Established District		28. No. of Stories 2½		
		29. Basement? Yes ☒ No ☐ full		
		30. Foundation Material stone, concrete 4065		
		31. Wall Construction log LC		
		32. Roof Type & Material gable, comp. CB 63		
		33. No. of Bays Front 5 Side 2		
		34. Wall Treatment aluminum siding 01 22		
		35. Plan Shape rectangular		
		36. Changes Addition: ☐ Altered ☒ Moved ☒ (Explain in #42) 22 1988		
		37. Condition Interior good CB Exterior fair		
		38. Preservation Underway? Yes ☒ No ☐		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road		
42. Further Description of Important Features This house stands on a new foundation in the park near Olive Boulevard. It is oriented as it was on the original site, which is just a few hundred yards away. The modern siding and older clapboards have been removed from the lower portions of the walls to reveal the massive logs, which were seriously damaged in their lowest courses by termites but unaffected farther up. The front elevation is symmetrical but the center bay is wider than the others. It has a low gable with a 1-over-1 window, while other (cont'd)		Photo		5. Other Name(s) Davis House, Faust Park
43 History and Significance The house from 15250 Olive Street Road that was given to St. Louis County by J. Allen Davis reflects its long and interesting history in its construction and detailing. The log construction of the main part of the house may go back to the time of Stephen Lanham, who bought 600 arpents here in 1817 and died here in 1841. He was one of the pioneer settlers of the county and was the brother of Hartley Lanham, who lived next door on (continued)				
44 Description of Environment and Outbuildings The house originally had several small outbuildings and a barn nearby. One of the smaller frame buildings, probably a washhouse, has been moved to Faust Park and placed near the house.				
45 Sources of Information Julie Barnhardt, "Man's dream of saving home may be bankrupt," Press Journal, Oct. 25, 1988, p. 1A; "Effort to save Davis home sees progress," Press Journal, Nov. 16, 1988, p. 3A. Letter from Gerhardt Kramer to Virginia Stith, July 22, 1988. continued		46. Prepared by E. Hamilton 47. Organization St. Louis County Parks 48. Date 7/89 49. Revision Date(s)		

Lanham-Townsend-Albrecht House
Davis House
15185 Olive Boulevard

42. continued

windows are two-over-two with non-fitting shutters. The front door has large sidelights and toplight and a glazed storm door. The original front porch had a hipped roof, four square posts with capital moldings and scalloped imposts, returns against the wall of the house, and shaped pierced balusters. In dismantling, however, the outline of an earlier porch was revealed, and it will be recreated in the current restoration.

The rear wing, which was of frame construction with brick nogging, was dismantled in large sections and will be recreated. It was two bays deep and had a door opening to the west.

43. continued

the original Conway House property. The Lanhams married sisters, the daughters of the Reverend John Cordell II. Stephen and Mary Lanham had three daughters, of whom Virginia married Joseph Conway, Junior, the man who gave the land for the Old Bonhomme Presbyterian Church. He was the brother of Samuel Conway, who married Frederick Bates, Jr.'s, widow Lavinia, and may have built the Conway House.

Pamela, another daughter, married Osborn M. Wood, and her sisters sold their interest to him in 1847. Osborn M. Wood seems to have run a general store. He died in 1849, and his probate records include a list of accounts receivable totalling \$593.91, mostly in amounts of one to twenty dollars. Many of the account names are of Bonhomme residents, including Lucius Lee Bates and Frederick Bates, Jr. His inventory lists no household furniture but several books.

In 1853 Pamela Wood sold the farm to Benjamin F. Townsend, who ran a wire and sieve factory on North Second Street north of Washington. He lived on the north side of Morgan (now Delmar) between 14th and 15th Streets. The 1850 census shows that he and his wife Lucinda were both from Pennsylvania. He was 35 and she was 30. They had two children: Thomas F., 4; and Laura, 2. Townsend died later in 1853. His widow Lucinda and their son and daughter probably moved to this farm, where they may have upgraded the interior with woodwork in the Greek Revival style popular in the 1850's. They lost this property in a foreclosure in 1877. It was acquired at that time by the administrator of the estate of Robert Charles. The Charles heirs sold it in 1881 to Emil L. Dosenbach, and the next year sold the estate, now 161.96 acres, to Samuel Albrecht, also called Edward S. Albrecht, a native of Germany.

Albrecht's home farm was in Meramec Township, on Olive Street Road near Gumbo. He also operated a blacksmith shop. He and his wife Elizabeth

Davis House
15185 Olive Boulevard

died within four months of each other in 1888, and the farm was inherited by their son Gottlieb. Gottlieb Albrecht lived here until 1912 and may have been responsible for the Victorian features of the exterior, including the front porch and center gable. Gottlieb was married to Elizabeth Mertz, the widow of Henry W. Mertz, who had owned Rinkel's Market. Gottlieb acquired the store in 1884 and operated it here until 1892. The Albrechts sold 80 acres of this property to Henry F. Schreve in 1912 for \$14,000.

J. Allen Davis Junior and his wife Lourane bought the old house and surrounding 12 acres about 1957. They sold it early in 1988 to the Barnes Continuing Care Corporation, which plans to build a long-term care facility there. When the house was threatened with demolition, Davis enlisted the aid of St. Louis County's Parks Advisory Committee, the Chesterfield Chamber of Commerce, and the Chesterfield Parks and Recreation Advisory Committee. A fund-raising campaign succeeded in obtaining the funds to move the house to nearby Faust Park, where it is currently undergoing restoration.

45. continued

St. Louis City Recorder of Deeds, Book D, p. 187; F, 244; G⁴, 367; H⁴, 415; Z⁶, 100; 489, 279.

St. Louis City Probate Court, 1688, 2904, 4077.

St. Louis County Recorder of Deeds, Book 5, p. 85; H, 157; 15, 368; 16, 424, 17, 612; 43, 604; 290, 283.

St. Louis County Probate Court, 653.





SAVE THE HISTORIC
DAVIS HOUSE
CALL 532 - 3399



HISTORIC INVENTORY

1. No		4. Present Name(s) Henry Hoch House		1. No	
2. County St. Louis		5. Other Name(s)		2. County St. Louis	
3. Location of Negatives 1983 Survey, frame 11				4. Present Name(s) Henry Hoch House	
6. Specific Location Faust Park 15185 Olive Boulevard		16. Thematic Category		28. No. of Stories 1½	
7. City or Town If Rural, Township & Vicinity Chesterfield		17. Date(s) or Period constructed c. 1880		29. Basement? Yes ☒ No ☐	
8. Site Plan with North Arrow		18. Style or Design Vernacular 08		30. Foundation Material 40 stone-faced concrete	
		19. Architect or Engineer		31. Wall Construction brick LB	
		20. Contractor or Builder Henry Hoch		32. Roof Type & Material gable/ GB 91	
		21. Original Use, if apparent residence OIA		33. No. of Bays DR Front 3 Side 3	
		22. Present Use vacant		34. Wall Treatment painted 30	
		23. Ownership Public ☒ Private ☐		35. Plan Shape Square	
		24. Owner's Name & Address, if known St. Louis County Dept. of Parks and Recreation 41 S. Central Ave. 63105		36. Changes Poch Addition: (Explain CB Altered ☒ in #42) other Moved ☒ 1988	
9. Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition 30 Interior Unknown Exterior Good	
10. Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☒ No ☐	
11. On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☒	
12. Is It Eligible? Yes ☐ No ☐				40. Visible from Public Road? Yes ☒ No ☐	
13. Part of Estab. Hist. Dist.? Yes ☐ No ☒				41. Distance from and Frontage on Road	
14. District Potent'l? Yes ☐ No ☐					
15. Name of Established District					
42. Further Description of Important Features The high-pitched roof had to be removed for the move, and it has been replaced (using many original materials) with two gabled dormers for which evidence was found in the original framing. The front porch at the time of the move was a hipped roof supported by four Tuscan columns and two antae. It was dismantled for the move and will be replaced by a one-bay porch for which evidence was found behind the other. Four iron tie-rod clamps ornament the front, two stars and two S-shapes. Windows		43. History and Significance Henry Hoch acquired the parcel on which this house was originally built from Samuel Fischer on October 5, 1876 for \$100. The 1878 Atlas, however, does not indicate a house on the lot at that time. Henry Hoch (1849-1939) was the son of Michael and Sarah Hoch, both of whom were natives of Alsace, France. In 1844 they arrived in the United States and worked on a farm in St. Louis County. Eventually Michael bought a brewery in Manchester and resided there until his death in 1860. His wife died in 1858. Henry was quite		Photo	
44. Description of Environment and Outbuildings The Hoch House sits near three other houses that have been moved from nearby Chesterfield to form an historical Village at Faust Park. The 98-acre park also contains the St. Louis Carousel and Thornhill, the home of Missouri's second governor.		45. Sources of Information William L. Thomas, <u>History of St. Louis County</u> (1911) p. 153. 1870, 1878, 1893 and 1909 County Atlas St. Louis County Recorder of Deeds, Book 70, p. 65; 148, 462. St. Louis City Recorder of Deeds, Book 563, p. 113. continued		46. Prepared by V-J Bass, E. Hamilton 47. Organization St. Louis County Parks 48. Date 49. Revision Date(s)	

1. No

2. County

4. Present Name(s)

5. Other Name(s)

Henry Hoch House
15185 Olive Boulevard

42. continued

are two-over-two under segmental arches. The front door has a toplight. A flue stands on the right side of the house between the front two windows. At the rear, the right bay appears to have been a porch open only to the rear. At some point it was fully enclosed with clapboards, but it has been reopened in the current restoration.

43. continued

young when his parents died, and stayed with his brother Edward after their deaths. (Edward was listed as a contractor in the 1893 County directory). After attending public schools, Henry found various work with farmers in Bellefontaine. This area was just east of Highway 40 on Olive Street Road. It was also called "Hilltown." It is probably named after August Hill, who settled in the area in 1837, and later opened a blacksmith shop on the south side of Olive. The town had two general stores - around 1850 Mr. Fischer opened a store on the west side of Olive. Another store was built around the same time at the corner of Olive and Schoettler Roads by William Reinhardt. Henry Hoch married Miss Lena Mertz in 1872; she was a daughter of Philip Mertz, a well-known farmer in the area and another Alsatian. They had three children: John Henry, Clementine, and Edward J. Hoch. Henry Hoch worked as a bricklayer until 1893, when he entered into the mercantile business across the street, which is now part of the Rinkel's Market. At that time he sold this property to Edward J. Hoch, probably his nephew, and his wife Amelia (Kroenung) for \$900. The property was listed in Amelia's name. They had married on March 18, 1885. Directories show that Amelia had resided in Manchester, owning real and personal property. The 1909 Pitzman Atlas indicates that they were still residing at this location that year. Henry Hochs son Edward J. Hoch would have been less than twenty-one in 1893 and married Cora B. Schulz in 1899.) The house had the address 909 Schoettler Road and was built on part of Lot 8, John Long's Subdivision of Survey 415.

The house was probably built by the combined efforts of Henry Hoch and his brother Edward. It was threatened with demolition in the mid-1980's by the expansion of the gasoline service station next door. Fortunately, it was donated to St. Louis County and moved in July, 1988. It is currently under restoration.

45. continued

St. Louis County Probate
county directories





HISTORIC INVENTORY

1 No		4 Present Name(s)		1 No	
2 County St. Louis		Mertz Log Cabin		2 County St. Louis	
3 Location of Negatives 34329-16		5 Other Name(s)		4 Present Name(s) Mertz Log Cabin	
6 Specific Location Faust Park 15185 Olive Boulevard		16 Thematic Category		28 No. of Stories 1½	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1848		29 Basement? Yes ☐ No ☒	
8 Site Plan with North Arrow		18 Style or Design Pioneer 05		30 Foundation Material stone, concrete 4065	
9 Coordinates UTM Lat Long		19 Architect or Engineer		31 Wall Construction log LC	
10 Site ☐ Building ☒ Structure ☐ Object ☐		20 Contractor or Builder		32 Roof Type & Material gable/shake GB 25	
11 On National Register? Yes ☐ No ☒		21 Original Use, if apparent residence OIA		33 No. of Bays Front 3 Side 1	
12 Is Eligible? Yes ☐ No ☐		22 Present Use vacant		34 Wall Treatment squared logs 23	
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒		23 Ownership Public ☒ Private ☐		35 Plan Shape rectangular	
14 District Potent'l? Yes ☐ No ☐		24 Owner's Name & Address, if known St. Louis County Dept. of Parks and Recreation 41 S. Central Ave. 63105		36 Changes (Explain in #42) porch R1 Addition: Altered ☒ Moved ☒ 1986	
15 Name of Established District		25 Open to Public? Yes ☐ No ☒		37 Condition Interior good Exterior good	
42 Further Description of Important Features		26 Local Contact Person or Organization		38 Preservation Underway? Yes ☒ No ☐	
The cabin is of the so-called "double pen" variety: two square log rooms connected by an enclosed hallway. The front of the house is shaded by a full-length verandah whose roof extends the line of the main roof. The squared logs are widely separated. The chinking was originally composed of flat stones set on edge. The restored chinking is more conventional mortar. The gable ends are weatherboarded and have two small windows. The roofing was corrugated metal at the time the house was moved, but it has		27 Other Surveys in Which Included Historic Buildings in St. Louis County (1983, 1985) p. 43.		39 Endangered? By What? Yes ☐ No ☒	
43 History and Significance		44 Description of Environment and Outbuildings		40 Visible from Public Road? Yes ☒ No ☐	
This cabin was originally built on the southeast quarter of the northwest fractional quarter of Section 18, Township 45 Range 5 East. It was built by Ludwig Mertz, and immigrant from Lembach, in the Alsace region of France. He was born in 1820 and lived until 1880. He and his wife, the former Katherine Salome Hiller, had three sons and three daughters, all of whom were baptised at the Zion Evangelical Church founded in 1838 (now Parkway United Church of Christ). Many of their descendants live in the area. The house				41 Distance from and Frontage on Road	
45 Sources of Information		46 Prepared by		5 Other Name(s)	
Gloria Dalton, ed. <u>Heritage of the Creve Coeur Area</u> (City of Creve Coeur, 1976), p. 75.		E. Hamilton			
Patricia Rice, "Historic Case of Cabin Fever," <u>St. Louis Post-Dispatch</u> , July 25, 1986.		47 Organization			
St. Louis City Recorder of Deeds, Book R4, page 99.		St. Louis County Parks			
		48 Date		49 Revision Date(s)	
		7/89			

Mertz Log Cabin
15185 Olive Boulevard

42. continued

been replaced by cedar shakes. The verandah has been rebuilt in four bays. Prior to the move the north bay was enclosed with clapboards and had two windows, but those alterations were not reinstated. At this writing the exterior restoration is nearly complete, and interior work is continuing.

43. continued

passed through many owners before being purchased by Maryville College in 1961. In 1986 the site was scheduled for redevelopment by the Baur Properties for the Maryville Center, an office park. Through the generosity of the development company, the house was donated to the St. Louis County Department of Parks and Recreation, which moved it to Faust Park. The move and re-erection were supervised by Wheelock Crosby Brown.

45. continued

St. Louis City Recorder of Deeds, Book R⁴, p. 99.

St. Louis County Recorder of Deeds, Book 5006, p. 346; 6590, 1590.

Interview with Rita Barlows July 9, 1986.







Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY SL-AS-020-074

1 No		4 Present Name(s) Wiehage-Mertz Smokehouse		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34465-0A		15185 Olive Boulevard		
5 Specific Location Faust Park 15185 Olive Boulevard		16 Thematic Category		2 County St. Louis 4 Present Name(s) Wiehage-Mertz Smokehouse 5 Other Name(s) 15185 Olive Boulevard
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1890's		
8 Site Plan with North Arrow		18 Style or Design vernacular 15		
		19 Architect or Engineer		
		20 Contractor or Builder		
		21 Original Use, if apparent smokehouse DIC		
		22 Present Use museum building		
		23 Ownership Public ☒ Private ☐		
		24 Owner's Name & Address, if known St. Louis County Dept. of Parks and Recreation 63105		
		25 Open to Public? Yes ☐ No ☒		
		26 Local Contact Person or Organization Virginia Stith 889-3655		
		27 Other Surveys in Which Included		
9 Coordinates UTM Lat Long		28 No. of Stories 1		
0 Site ☐ Building ☒ Structure ☐ Object ☐		29 Basement? Yes ☐ No ☒		
11 On National Register? Yes ☐ No ☒		30 Foundation Material stone 40		
12 Is It Eligible? Yes ☐ No ☐		31 Wall Construction log LC		
13 Part of Estab Hist Dist? Yes ☐ No ☒		32 Roof Type & Material GB 25 gable, cedar shake		
14 District Potent'l? Yes ☐ No ☐		33 No. of Bays Front 1 Side 1		
5 Name of Established District		34 Wall Treatment exposed 23		
		35 Plan Shape rectangular		
		36 Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☒ 1926		
		37 Condition Interior good Exterior good		
		38 Preservation Underway? Yes ☒ No ☐		
		39 Endangered? By What? Yes ☐ No ☒		
		40 Visible from Public Road? Yes ☒ No ☐		
		41 Distance from and Frontage on Road		
42 Further Description of Important Features This building, though moved, has the original rock and mud chinking still visible on the inside. It has squared V-notched logs, typical of this region. The roofbeams are round logs. The gable ends, which were clapboard, have not been replaced as yet.				5 Other Name(s) 15185 Olive Boulevard
43 History and Significance Franz or Francis Louis Wiehage acquired 60 acres in Survey 936 in 1880 from William D. Bacon. This had been part of the large Bacon estate, from which the main house still survives on Henry Avenue. This tract was at the southeast corner of Clayton Road and Woods Mill Road. Wiehage's homestead was in Section 11, Township 44 Range 4, off New Ballwin Road. When he died in 1889 he left that property to his son Edward and this one to son Henry F., called Fred. Fred settled on this tract and was responsible (contd)				
44 Description of Environment and Outbuildings In its new location, the Smokehouse stands just north of and at right angles to the Mertz Log Cabin, at the east edge of Faust County Park. It will be part of a village of historic houses from the Chesterfield area.				
45 Sources of Information Marvin and Marcella Mertz 532-1992 St. Louis County Probate Court, #715, 17724 St. Louis County Recorder of Deeds, Book 16, p. 42.				5 Other Name(s) 15185 Olive Boulevard
46 Prepared by Esley Hamilton				
47 Organization St. Louis County Parks				
48 Date 9/89 49 Revision Date(s)				

Wiehage-Mertz Smokehouse
15185 Olive Boulevard

43. continued

for building the smokehouse, presumably before 1900. Fred Wiehage died in 1845, leaving two sons and three daughters. His farm was acquired by his daughter Hilda and her husband William E. Mertz, who farmed it for several more decades. The property is currently undergoing commercial development, but Marvin Mertz, a son of William E., and his wife Marcella arranged for the smokehouse to be moved from the original site to Faust Park. There the smokehouse is displayed adjacent to the Mertz Log Cabin, which was built by Mr. Mertz's ancestor Ludwig Mertz.



HISTORIC INVENTORY

SL-AS-020-075

1 No		4 Present Name(s) St. Louis Carousel		1 No	
2 County St. Louis		5 Other Name(s) Forest Park Highlands Carousel		2 County St. Louis	
3 Location of Negatives 34465-7A				4 Present Name(s) St. Louis Carousel	
Specific Location Faust Park, 15185 Olive Boulevard		16. Thematic Category		28. No. of Stories 1	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1920		29. Basement? Yes ☐ No ☒	
8 Site Plan with North Arrow		18. Style or Design Dentzel Company		30. Foundation Material concrete	
		19. Architect or Engineer		31. Wall Construction none	
		20. Contractor or Builder Dentzel Co. of Philadelphia		32. Roof Type & Material canvas	
		21. Original Use, if apparent carousel 08 G		33. No. of Bays Front NA Side NA	
		22 Present Use carousel		34. Wall Treatment none	
		23 Ownership Public ☒ Private ☐		35. Plan Shape circular	
		24. Owner's Name & Address, if known St. Louis County Department of Parks and Recreation		36. Changes (Explain in #42) Addition: ☐ Altered: ☒ Moved ☒ 1980	
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☒ No ☐		37. Condition Interior good Exterior good	
10 Site: ☐ Building: ☐ Structure ☒ Object: ☐		26 Local Contact Person or Organization Faust Park 537-0222		38. Preservation Underway? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☐				40. Visible from Public Road? Yes ☒ No ☐	
13 Part of Estab Hist Dist? Yes ☐ No ☒				41. Distance from and Frontage on Road	
14 District Potent'l? Yes ☐ No ☐					
15 Name of Established District					
42 Further Description of Important Features The carousel was designed to accommodate 72 horses. Curenly the park owns 71, of which 68 are functioning. Two or three of the horses are replacements, but the rest are outstanding examples of Dentzel carving. The carousel has four rows. The outer row is fixed, while the others move up and down. The horses in the outer row are larger that the others and have three feet on the ground, while most of the others appear to be galloping. Four of the animals are stags, fitted with real reindeer antlers. (continued)					
43 History and Significance The St. Louis Carousel was hand-carved by the Dentzel Company of Philadelphia ca. 1920. For over thirty years it was a popular attraction at the Forest Park Highlands in St. Louis. When the amusement park burned in 1963, the carousel, which had escaped major damage, was bought by Howard C. Ohlendorf to prevent the sale of its horses to individual collectors. Under Ohlendorf's supervision, the carousel was restored for operation. In 1965, it was donated to the St. Louis County Department of Parks and (contd)					
44 Description of Environment and Outbuildings The carousel is housed in a new structure made of precast concrete panels and columns, with a glass bay on its west side to allow the carousel to be seen from the plaza around it. Another part of the building is being used for changing exhibitions. Ladue Building and Engineering was responsible for the design and (continued)					
45 Sources of Information St. Louis County Department of Parks and Recreation.					
46. Prepared by Esley Hamilton					
47. Organization St. Louis County Parks					
48. Date 8/89					
49 Revision Date(s)					

St. Louis

St. Louis Carousel

Forest Park Highlands Carousel

The St. Louis Carousel
15185 Olive Boulevard

42. continued

and the carousel also includes two two-seat sleighs. Colors of animals and trappings are varied so that no two are identical. The outer cornice of the carousel has elaborate gilded garlands along a broad frieze that is divided by acanthus-leaf brackets. The inner face of the carousel is cylindrical but has an eighteen-sided cornice of two tiers, the lower a series of rectangular mirrors, the upper a series of semicircular crowns with latticework decoration. The lower panels of this core were originally scenic views, but the present core is new.

43. continued

Recreation and installed at Sylvan Springs Park in south St. Louis County. The carousel was operated there during summer months until 1979, when it became apparent that time and weather were beginning to take their toll. Recognizing the carousel's importance as an American cultural artifact, the St. Louis County Historic Buildings Commission formed a committee to advise the Parks Department on how to preserve the carousel. In 1981, the Friends of the Carousel was formed as a not-for-profit corporation to raise funds for the carousel's restoration and placement in a climate-controlled facility. Due to the efforts of the Friends, the Historic Buildings Commission, the Parks Department and other concerned groups and individuals, the St. Louis Carousel was again available for the enjoyment of the general public in the Carousel Building (Gallery?) in Faust Park in May of 1987.

44. continued

construction of the building. Architect Raymond Maritz contributed the design. Ben Kozak of the Maritz Corporation designed the interior lighting and selected the neutral interior colors.



HISTORIC INVENTORY

SL-A5-020-076

1 No	4 Present Name(s) 1898 Steam Riding Gallery		1 No
2 County St. Louis	5 Other Name(s) 15185 Olive Boulevard		2 County St. Louis
3 Location of Negatives 34465-3A	16 Thematic Category		4 Present Name(s) 1898 Steam Riding Gallery
5 Specific Location Faust Park, 15185 Olive Blvd.	17 Date(s) or Period constructed c. 1898	28 No. of Stories 1	5 Other Name(s) 15185 Olive Boulevard
7 City or Town If Rural, Township & Vicinity Chesterfield	18 Style or Design carousel	29 Basement? Yes ☐ No ☒	
8 Site Plan with North Arrow	19 Architect or Engineer	30 Foundation Material concrete	
	20 Contractor or Builder Armitage-Herschell Company	31 Wall Construction none	
	21 Original Use, if apparent carousel 086	32 Roof Type & Material canvas	
	22 Present Use carousel	33 No. of Bays Front NA Side NA	
	23 Ownership Public ☒ Private ☐	34 Wall Treatment none	
	24 Owner's Name & Address, if known St. Louis County Dept. of Parks and Recreation 41 S. Central Clayton MO 63105	35 Plan Shape round	
9 Coordinates UTM Lat Long	25 Open to Public? Yes ☒ No ☐	36 Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☒	
10 Site ☐ Building ☐ Structure ☒ Object ☐	26 Local Contact Person or Organization	37 Condition Interior good Exterior good	
11 On National Register? Yes ☐ No ☒	27 Other Surveys in Which Included	38 Preservation Underway? Yes ☐ No ☒	
12 Is It Eligible? Yes ☐ No ☐		39 Endangered? By What? Yes ☐ No ☒	
13 Part of Estab Hist Dist? Yes ☐ No ☒		40 Visible from Public Road? Yes ☐ No ☒	
14 District Potent'l? Yes ☐ No ☐		41 Distance from and Frontage on Road	
15 Name of Established District			
42 Further Description of Important Features Twenty-four horses are mounted in twelve pairs, rocking back and forth in unison. They are interspersed with four two-seat sleighs. The horses all have a galloping stance except for one which is running. Currently one horse has been removed for repairs. The horses are mounted above planking that is painted in primary colors. Adjacent to the horses and at the same level as the rocking mechanism is a second deck painted blue. The inner wagon-wheel-like mechanism is screened by a picket fence painted in (cont'd)		Photo	
43 History and Significance Built by the Armitage Herschell Company of Tonawanda, NY, in 1898, this Steam Riding Gallery was one of hundreds made by the company in the 1890's. Only a few are known to exist today. In 1898 this Steam Riding Gallery was brought to the vicinity of Randolph Springs, east of Clifton Hill, Missouri, by Steinbeck & Potter. Owned by J. F. Rager Honeywell by 1923, it was based in New Florence, Missouri, while it (continued)			
44 Description of Environment and Outbuildings The Steam Riding Gallery has been installed in Faust Park southwest of the larger Carousel Building and near the park's public restroom. This carousel can be sheltered by canvas curtains and is dismountable for longer periods of storage.			
45 Sources of Information Stephanie Grant Stanley, "Second carousel to call Faust home," Clayton Citizen Journal, May 11, 1988. Pat Jones, St. Louis County Department of Parks and Recreation.		46 Prepared by Esley Hamilton	
		47 Organization St. Louis County Parks	
		48 Date 8/89	
		49 Revision Date(s)	

1898 Steam Riding Gallery
15185 Olive Boulevard

42. continued

sections of red, white, blue and yellow. The carousel has a new concrete base and a canvas roof. Historically it was driven by a steam engine which is still on display next to the carousel (made by Ames Iron Works of Oswego, New York), but it is now powered by a modern electric motor. The whole complex is surrounded by a wrought-iron fence.

43. continued

traveled to local fairs. Six years later, in 1929, the Steam Riding Gallery was purchased by the Montgomery County Old Settlers Association who in turn sold it to the International Order of Odd Fellows Lodge in 1942. Mark Twain Amusements Inc. acquired the Steam Riding Gallery in 1956. In 1979 it was bought by Bill Auchly of Montgomery County who undertook restoration of the steam engine, and in 1985 the Steam Riding Gallery was sold to Carlos and Judy Sardina, who restored the carousel and animals to operating order. They operated it in Forest Park in 1987 and in Faust Park in 1988. It was acquired for the county in 1989 and will remain in Faust Park permanently.



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY SL-AS-020-078

1 No 17W620026		4 Present Name(s) John Bayer House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-21		18450 Olive Street Road		
6 Specific Location 3.56 acres, pt. of Lot 7, R. H. Stevens Farm SD		16. Thematic Category		2. County St. Louis
		17 Date(s) or Period constructed c. 1913		
7 City or Town If Rural, Township & Vicinity Chesterfield		18. Style or Design Princess Anne 20		4 Present Name(s) John Bayer House
8 Site Plan with North Arrow		19. Architect or Engineer		
9 Coordinates UTM Lat Long		20. Contractor or Builder		63
		21. Original Use, if apparent residence DIA		
		22 Present Use office		
		23 Ownership Public ☐ Private ☒		
0 Site ☐ Building ☒ Structure ☐ Object ☐		24. Owner's Name & Address, if known Reno Castaldi Trust 9728 Conway Road St. Louis MO 63124		John Bayer House
1 On National Register? Yes ☐ No ☒		25. Open to Public? Yes ☒ No ☐		
2 Part of Estab Hist Dist? Yes ☐ No ☒		26 Local Contact Person or Organization Chesterfield Fence Co. 532-4054		18450 Olive Street Road
3 District Potent'l? Yes ☐ No ☒		27. Other Surveys in Which Included		
5 Name of Established District		28. No. of Stories 1½		18450 Olive Street Road
		29. Basement? Yes ☒ No ☐		
		30. Foundation Material concrete 65		18450 Olive Street Road
		31. Wall Construction frame wu		
		32. Roof Type & Material 16 cross gable, comp.		18450 Olive Street Road
		33. No. of Bays Front 2 Side irr. 3		
		34. Wall Treatment clapboard 21		18450 Olive Street Road
		35. Plan Shape rectangular		
		36. Changes (Explain in #42) Addn ☒ Moved ☐		18450 Olive Street Road
		37. Condition Interior Exterior fair		
		38. Preservation Underway? Yes ☐ No ☒		18450 Olive Street Road
		39. Endangered? By What? Yes ☒ No ☐		
		40. Visible from Public Road? Yes ☒ No ☐		18450 Olive Street Road
		41. Distance from and Frontage on Road /313		
42 Further Description of Important Features This former farmstead is now a construction yard for a fence company. The house serves as the office. It has full-width gables on all four sides but skirted with roofing as though they were dormers. The hip-roofed porch of one bay has columns and plain balustrade on a concrete base. The porch is actually recessed about three feet into the house, so that it has two columns on the outside wall but only one on the other side. Windows are one-over-one, and several are paired.				
43 History and Significance In 1909, this property was owned by Josephine Witte. She lived in Ferguson, and most of her property was in Township 47 Range 6. She sold two acres of this 140-acre tract in 1913 to John and Caroline Bayer for \$500, and they probably built this house. Bayer was a native of Germany, born in 1847. He came to St. Louis County in 1867, where other Bayers, probably related, were already settled. He married Caroline Uhnland (contd)				
44 Description of Environment and Outbuildings The east part of the property is a fenced yard stacked with construction. The large barn on the south side of the property is also used for storage.				
45 Sources of Information St. Louis County Probate Court, #4856, #7028. St. Louis County Recorder of Deeds, Book 324, p. 588. William L. Thomas, <u>History of St. Louis County</u> (1911), pp. 58-59.				46. Prepared by Esley Hamilton
				47. Organization St. Louis County Parks
				48. Date 8/89
				49. Revision Date(s)

John Bayer House
18450 Olive Street Road

43. continued

in 1872, and they had six children. By 1911, when his biography was published, Bayer had acquired two farms in the Gumbo Bottom of 160 and 92 acres, but he still lived on a farm he had rented decades before. This house was apparently intended to replace that. He died in 1925, having survived his wife, and he left this house to his youngest daughters Annie and Amelia, who were unmarried.



HISTORIC INVENTORY

SL-AS-020-079

1 No 17W510015		4 Present Name(s) Valentine Kroenung House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34104-22		18620 Olive Street Road		
6 Specific Location 5 acres in Survey 368 and 153, part of SD of Kroenung Estate T45 R3		16. Thematic Category 030		2. County St. Louis 4 Present Name(s) Valentine Kroenung House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1865		
8 Site Plan with North Arrow		18. Style or Design Greek Revival 31		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence DIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known William H. Cox		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		
0 Site ☐ Structure ☐ Building ☒ Object ☐		27. Other Surveys in Which Included		
11 On National Register? Yes ☐ No ☒		12. Is It Eligible? Yes ☐ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		
15 Name of Established District		28. No. of Stories 2 - 1		
		29. Basement? Yes ☒ No ☐		
		30. Foundation, Material stone 40		
		31. Wall Construction frame WW		
		32. Roof Type & Material gable, comp. GB GB 63		
		33. No. of Bays Front 3 Side 4		
		34. Wall Treatment clapboard 21		
		35. Plan Shape rectangular		
		36. Changes (Explain in #42) ☒ Addition ☐ Altered ☐ Moved ☐ PD		
		37. Condition Interior 20 Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /350		
12 Further Description of Important Features Excellent example of late Greek Revival has two-story pedimented verandah under main roof of the house. Broad frieze and cornice frame pediment which has a half-round panel in center. Square posts have capitals and corresponding antae. Second-floor balustrade is complex "Chinese Chippendale" pattern. Windows are six-over-six set in broad pedimented frames. The door, in the left bay, is set in tall surround of sidelights and toplights. Wing at rear is one-story high and has one-bay side entry and verandah.		Photo		5 Other Name(s) 18620 Olive Street Road
13 History and Significance This is one of the most striking Greek Revival houses in St. Louis County. It seems to have been built just after the Civil War by Valentine Kroenung, who bought this land in 1863 from Frederick and Eliza Hyatt. It may, however, be older. Valentine Kroenung died before the end of 1870, when his widow divided the land with their son Cosmos Damian Kroenung, a daughter Agnes Schaeper, and the children of two other (cont'd)				
14 Description of Environment and Outbuildings A two-car frame shed-roof garage is southeast of the house. Farther east is a white clapboard granary. The grounds are well-maintained.				
15 Sources of Information Tom Shaw Real Estate 532-1922. St. Louis City Recorder of Deeds, Book 273, p 403; 439, 448. Thomas, History of St. Louis County (1911) Vol. II, p.344-349.		46. Prepared by Esley Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49. Revision Date(s)		

Valentine Kroenung House
18620 Olive Street Road

43. continued

deceased daughters. In the division, the widow Catherine got this lot, which suggests that the house was the family homestead. Cosmos Damian acquired the property by 1878. He later sold it to Ernst Bayer, born 1848, who was the son of Thomas Bayer, an 1843 immigrant from Germany. Thomas, Ernst, and his younger brother Gottlieb (born 1850), all acquired good sized farms in the bottoms. Ernst and his wife Josephine Kraus had nine children.

ROAD

SL-AS-020-079

13626

18629

OLIVE





HISTORIC INVENTORY

SL-AS-020-080


1 No 17W510060		4 Present Name(s) Parks-Wilmas House		1 No
2 County St. Louis		5. Other Name(s)		
3 Location of Negatives 34104-23		18626 Olive Street Road		
6 Specific Location 2.42 acres in Survey 368, including the E part of Lot 5, A. Boisselier Estate T45 R3		16. Thematic Category		2. County St. Louis 63 4 Present Name(s) Parks-Wilmas House
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed 1925		
4 Site Plan with North Arrow		18. Style or Design bungalow 22		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence DIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known Treva A. Brewen Rt. 1, Box 112 Peace Valley, MO 65788		
		25. Open to Public? Yes ☐ No ☒		
Coordinates UTM Lat Long		26 Local Contact Person or Organization		
0 Site ☐ Building ☒		27. Other Surveys in Which Included		
1 On National Register? Yes ☐ No ☒		28. No. of Stories 1 1/2 - 1		
12 Is It Eligible? Yes ☐ No ☐		29. Basement? Yes ☒ No ☐		
3 Part of Estab Hist Dist? Yes ☐ No ☒		30. Foundation Material stone 40		
14 District Potent'l? Yes ☐ No ☒		31. Wall Construction frame WU		
15 Name of Established District		32. Roof Type & Material high hip, comp. HPS		
		33. No. of Bays Front 3 Side 3		
		34. Wall Treatment clapboard 21		
		35. Plan Shape irregular		
		36. Changes (Explain in #42) <u>Perch</u> Addition ☐ <u>FU</u> Altered ☒ Moved ☐		
		37. Condition Interior Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /281		
42 Further Description of Important Features Front part of house has lower hipped roof and hip-roof dormer with paired windows. Front verandah has four Tuscan columns, plain slat balustrade, and lattice work under floor. The entry bay is recessed, with angled windows on either side of three-part door composition. Other dormers are on sides. Rear wing has shed roof.		Photo		5 Other Name(s) 18626 Olive Street Road
43 History and Significance In the nineteenth century this land was part of the larger farm of Charles L. Boisselier, who died in 1907. His wife Amelia died in 1920, leaving her house, which was on the site of the present 18652 Olive, to her son Charles D. Boisselier. The four surviving Boisselier daughters married into the neighboring Burkhardt, Kroenung, and Willman families. Charles (who died in 1928) and his wife Anna sold twelve acres here in 1925 to Joseph Parks, and he filed a deed of trust for \$20,000, an amount (continued)				
44 Description of Environment and Outbuildings Shrubs around the house are overgrown, and front entry is not easily accessible. Gable-roofed garage is in back. (1)				
45 Sources of Information St. Louis County Probate Court, #2736, 5525, 8335. St. Louis County Recorder of Deeds, Book 708, p. 499 & 500; 765, 324.		46. Prepared by Esley Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 8/89 49 Revision Date(s)		

Parks-Wilmas House
18626 Olive Street Road

43. continued

which suggests he built this house. Parks died only a few months later, however, and early the next year his widow Regina and two minor children sold this property to Clifford Wilmas.

SL-AS-020-080



LOT 1

ROAD

108.45

49'
280.83

186.21

123.68'

DR- 3359-580
CIRCUIT CT - CAUSE # 444366
MO APPEALS CT - # 44468 - # 44469

EDWARD H. (ETAL) TREMPER

269-8-2-66

7585-1499

S. 11° 45' E.

44370'

17W51-0060

BREWEN TREVA A.

P204-0707

2.42 AC

352'
ROAD 20' W.

ESTATE

751

KROENUNG

102'

40'

259.00

117'

N. 78° E.

EAST LINE - LOT 5

S. LINE - SUR 365



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

SL-AS-020-081

1 No 16Q520404		4 Present Name(s) Braun-Kram House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 34200-36		228 River Valley Drive		
6 Specific Location Lot 228, River Bend Estates, 5th Addition		16. Thematic Category		2 County St. Louis
		17 Date(s) or Period constructed c. 1870 and later		
		18. Style or Design Victorian revival 02		
		19. Architect or Engineer		
7 City or Town If Rural, Township & Vicinity Chesterfield		20. Contractor or Builder		4 Present Name(s) Braun-Kram House
8 Site Plan with North Arrow		21. Original Use, if apparent residence DIA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
9 Coordinates Lat Long		24. Owner's Name & Address, if known Roger A. & Karen A. Slattery		5 Other Name(s) 228 River Valley Drive
10 Site ☐ Building ☒ Structure ☐ Object ☐		25. Open to Public? Yes ☐ No ☒		
11 On National Register? Yes ☐ No ☒		26. Local Contact Person or Organization		
12 Is It Eligible? Yes ☐ No ☐		27. Other Surveys in Which Included		
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☒		Photo
15 Name of Established District		28. No. of Stories 2 1/2		
		29. Basement? Yes ☒ No ☐		
		30. Foundation Material not evident 01		
		31. Wall Construction frame WU		Braun-Kram House
		32. Roof Type & Material gable, comp GB 63		
		33. No. of Bays DR 3 Front Side irr 2		
		34. Wall Treatment aluminum siding 54		
		35. Plan Shape irregular		228 River Valley Drive
		36. Changes (Explain in #42) puch Addition PO Altered Moved		
		37. Condition Interior 22 Exterior good		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☐ No ☒		continued
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /122'		
42 Further Description of Important Features House has double-height verandah across the front, with four square posts and X-pattern railing. A gable over the front door has scalloped shingles and a small one-over-one window. The door itself has a framework of scrolled broken pediment and pilasters, with narrow sidelights. Front windows are paired, one-over-one, with non-fitting plank shutters. A wing to the south has another entry and connects with the front-facing garage.				
43 History and Significance This land was part of the extensive holdings of Richard and Missouri Stevens at mid-century, although the earliest part of the house may go back to an earlier pioneer settler. It was acquired before 1870 by John Braun, who probably enlarged the house already on the site or started this one. He had four sons and a daughter by his first wife, the former Elizabeth Heller, and after her death when he remarried (Louisa)				
44 Description of Environment and Outbuildings Front yard is framed by a white picket fence.				
45 Sources of Information St. Louis County Probate Court, #1817, 8445. St. Louis County Recorder of Deeds, Book 81, p. 613. Karen Slattery.				
46. Prepared by E. Hamilton				
47. Organization St. Louis County Parks				
48. Date 8/89 49. Revision Date(s)				

Braun-Kram House
228 River Valley Drive

43. continued

his children deeded their claim to this property to him in 1895. When John Braun died in 1900 this property was no longer listed as part of his estate, but no deed of sale has been found. One of his sons, John J. Braun (died 1913), ran a general store in Fern Ridge, the next crossroads settlement on Olive east of Lake. By 1909, this property had been acquired by Herman Kram.

Kram sold his farm during his lifetime to two of his sons, J. Edward and John H. The sale in 1927 included the 66 acres facing Olive in Survey 207 and the 27.56 acres behind it in Survey 387, extending back to Creve Coeur Lake. They paid \$20,000. Kram died the next year leaving seven children, including two daughters married into the neighboring Ravens family. The present owners report that the house was used as the office of the builder of River Bend subdivision. The main part of the house is thought to date from about 1880, with an older part moved and added. The separate summer kitchen or wash house has also been incorporated into the main house.



HISTORIC INVENTORY

SL-AS-020-082

1 No 18S520635		4 Present Name(s) Hoch-Broemmelsieck House		1 No
2 County St. Louis		5 Other Name(s) 910 Schoettler Road		
3 Location of Negatives 33061-7				
6 Specific Location A tract 50 by 126 ft. in Survey 415, T45 R4		16 Thematic Category		2. County St. Louis 4 Present Name(s) Hoch-Broemmelsieck House 5 Other Name(s) 910 Schoettler Road
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1910		
8 Site Plan with North Arrow		18. Style or Design Victorian vernacular 12		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence DWA		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24 Owner's Name & Address, if known J & J Window Sales Inc. 600 Cepi Drive Chesterfield, MO 63005		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization		
0 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		
11. On National Register? Yes ☐ No ☒		12 Is It Eligible? Yes ☐ No ☐		
13 Part of Estab Hist Dist? Yes ☐ No ☒		14. District Potent'l? Yes ☐ No ☐		
15 Name of Established District		28. No. of Stories 1½		
		29. Basement? Yes ☒ No ☐		
		30. Foundation Material stone 40		
		31. Wall Construction frame WW		
		32. Roof Type & Material 16 GB SD cross gable, comp.		
		33. No. of Bays Front 3 Side irr. 2 DR		
		34. Wall Treatment 64 asbestos shingles		
		35. Plan Shape irregular		
		36. Changes (Explain in #42) Porch Addition ☐ Altered ☒ Moved ☐ CB		
		37. Condition Interior Exterior fair		
		38. Preservation Underway? Yes ☐ No ☒		
		39. Endangered? By What? Yes ☒ No ☐ redevelopment		
		40. Visible from Public Road? Yes ☒ No ☐		
		41. Distance from and Frontage on Road /50		
42 Further Description of Important Features This house has a front gable with a window. It and the side gable begin about a foot below the cornice line. The front door is off center below the gable; possibly the house originally had two doors. Windows are two-over-two. A brick chimney rises in the center of the roof. A rear wing has a low addition in the back. The hip-roofed front porch has turned posts on a rebuilt concrete base.		Photo		
43 History and Significance The whole east side of Schoettler Road from Olive to Conway was once the property of August Hill. He started selling it in the 1880's as the crossroads settlement of Bellefontaine or Hilltown grew up. A two-acre strip south from Olive was acquired by Ernest and Caroline Schilling of St. Louis. They sold it to Frederick Newmann in 1896 for \$625, and five months later he sold to Henry Hoch for \$1,850. If Newmann built a house during that time, it was not this one, because no house appears here on the detailed (cont'd)				
44 Description of Environment and Outbuildings A long barn/garage structure is southeast of the house.				
45 Sources of Information St. Louis County Recorder of Deeds, Book 85, p. 504; 88, 423; 503, 526; 6620, 1397.		46. Prepared by E. Hamilton		
		47. Organization St. Louis County Parks		
		48. Date 8/89 49 Revision Date(s)		

Hoch-Broemmelsieck House
910 Schoettler Road

43. continued

plan of Bellefontaine published in the county atlas of 1909. A house does appear on the south half of the property, which Hoch had sold to Annie Eberwein by 1909. Hoch was perhaps the most prominent man in Bellefontaine as the proprietor of the general store. He had earlier built the house across the street that has recently been moved to Faust Park. He must have built this house shortly after 1909, and it was standing when he finally sold the property in 1921 to William Broemmelsieck. This house is a late example of its style, which had been popular since the 1890's.

SL-AS-020-082

OLIVE

910 929

830

SCHOETTLER Road

ROOSEVELT PARKWAY



1801

CONWAY



SL-AS-020-083

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 18S520020 2 County St. Louis 3 Location of Negatives 33061-5	4 Present Name(s) Joe Walka House 5 Other Name(s) 929 Schoettler Road					
6 Specific Location Part of Lot 3, John Long Estate in Survey 415, Township 45 Range 4 7 City or Town If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16 Thematic Category 17 Date(s) or Period constructed c. 1905 18 Style or Design Queen Anne/vernacular 07 19 Architect or Engineer 20 Contractor or Builder 21 Original Use, if apparent residence DIA 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known Andrew A. & Marilyn A. Henske and Leo B. & Theresa M. Pelligreen 23 Country Life Acres, St. Louis 25 Open to Public? 63131 Yes ☐ No ☒ 26 Local Contact Person or Organization 27 Other Surveys in Which Included	28 No. of Stories 1½ - 1 - 1 29 Basement? Yes ☒ No ☐ 30 Foundation Material stone, concrete 31 Wall Construction frame brick 32 Roof Type & Material GGB cross gable, comp SD 33 No. of Bays Front 3+2 Side irr 34 Wall Treatment aluminum siding 54 35 Plan Shape irregular 36 Changes (Explain in #42) ☒ Addition ☒ Altered ☐ Moved ☐ 37 Condition Interior 22 Exterior good 38 Preservation Underway? Yes ☐ No ☒ 39 Endangered? By What? Yes ☒ No ☐ redevelopment 40 Visible from Public Road? Yes ☒ No ☐ 41 Distance from and Frontage on Road /82'				
9 Coordinates UTM Lat Long 10 Site ☐ Building ☒ Structure ☐ Object ☐ <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>11 On National Register? Yes ☐ No ☒</td> <td>12 Is It Eligible? Yes ☐ No ☐</td> </tr> <tr> <td>13 Part of Estab Hist Dist? Yes ☐ No ☒</td> <td>14 District Potent'l? Yes ☒ No ☐</td> </tr> </table> 15 Name of Established District	11 On National Register? Yes ☐ No ☒	12 Is It Eligible? Yes ☐ No ☐	13 Part of Estab Hist Dist? Yes ☐ No ☒	14 District Potent'l? Yes ☒ No ☐	42 Further Description of Important Features Main house is L-shaped, with front-facing gable in north bay and two-bay porch which has turned posts and anta and x-pattern railings. The gable front is ornamented with saw-tooth shingles; a window extends from the main hall halfway into the gable. The original narrow clapboarding is still visible on the porch; the new siding is much wider. Windows in this part are two-over-one. In the newer wings windows are three-over-one. The north wing has a concrete block foundation and a gable roof. The south wing has a 43 History and Significance Samuel M. Fisher, who owned a farm on the west side of Schoettler from Olive to Conway, began selling off lots near the corner of Olive in 1869, when he sold 2 acres to Edward Hoch. Another half acre went to Edward's brother Henry in 1876 (see the Hoch House now in Faust Park). The remaining 32 acres went to Oscar Linss in 1884 for \$2200. This house could date from that period, but more likely it was built by Joe Walka, 44 Description of Environment and Outbuildings The house is in a row of small residential structures but immediately adjacent to now commercial development facing Olive Boulevard. 45 Sources of Information St. Louis City Recorder of Deeds, Book 369, page 17; 384, 187; 563, 113. St. Louis County Recorder of Deeds, Book 22, page 464; 173, 231; 463, 463; 657, 499; 5503, 452, 6708, 2153.	
11 On National Register? Yes ☐ No ☒	12 Is It Eligible? Yes ☐ No ☐					
13 Part of Estab Hist Dist? Yes ☐ No ☒	14 District Potent'l? Yes ☒ No ☐					
46 Prepared by E. Hamilton 47 Organization St. Louis County Parks 48 Date 8/89 49 Revision Date(s)						

2. County
St. Louis

4. Present Name(s)
Joe Walka House

5. Other Name(s)
929 Schoettler Road

Photo

Joe Walka House
929 Schoettler Road

42. continued

nearly flat shed roof. The main block has brick chimneys at the south end and rear.

43. continued

who bought the present half-acre lot from Linss and his wife Olivia in 1905 for \$300. The house is indicated in the 1909 county atlas. The property was later acquired by Oliver F. and Emelia M. Queatham, who obtained a corrected deed in 1919. In 1924 the property was sold by Louis and Loretta Sellenrick to Mary A. and George H. Sellenrick, and in 1964 by Chesterfield Manor, Inc., to Andrew A. Henske. Henske and his wife sold a half interest to Leo & Theresa Pelligreen in 1974.

SL-AS-020-083
BOULEVARD

SCHOETTLER

30' W.

ROAD

STATE OF MO.
R-O-W
8183-22
0.02 AC.

925

ST. LOUIS COUNTY R-O-W
8348-685 0.12 AC.

82.3'

STATE OF MISSOURI
7961-1051 0.89 AC.

PARCEL A

1.34 AC.

TEXACO REFINING & MARKETING INC.
8032-2060

185520723

6078-2153
6708-2153
RELLIGREEN, LEO B.
ET AL
0.50 AC.

18552-0020

18552-0471

HENSKE ANDREW A. (ETAL)
7358-659 1.13 ACRES

STATE OF MO. 7777-1130 0.70 AC.

60' W. ONLY

(WAS 01108 ST RD)
125.00'

14.36'



HISTORIC INVENTORY

1 No 18S610594		4. Present Name(s) Edward F. Hill House		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 33061-2		950 Schoettler Road		
6 Specific Location Part of August Hill Estate, 618 ft. south of Olive Street Road in Survey 415		16. Thematic Category		2. County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1893		
8 Site Plan with North Arrow		18 Style or Design Queen Anne <i>09</i>		
		19. Architect or Engineer		
		20. Contractor or Builder		
		21. Original Use, if apparent residence <i>OIA</i>		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
		24. Owner's Name & Address, if known George E. & Pearl E. Hill		
		25. Open to Public? Yes ☐ No ☒		
9 Coordinates UTM Lat Long		26. Local Contact Person or Organization 536-2560		4 Present Name(s) Edward F. Hill House
0 Site ☐ Building ☒ Structure ☐ Object ☐		27. Other Surveys in Which Included		
1 On National Register? Yes ☐ No ☒				
2 Is It Eligible? Yes ☐ No ☐				
3 Part of Estab Hist Dist? Yes ☐ No ☒				
4 District Potent'l? Yes ☒ No ☐				
5 Name of Established District				
12 Further Description of Important Features The second floor is not quite full height; windows on the outer bays are slightly lower than those in the gables and rise to immediately under the roof overhang. Gables at the end and over the front door are ornamented with elaborate jigsaw gingerbread. Front porch is over the center bay. It has a shed roof with a small front gable; sides and front are covered with shaped shingles in two colors. Windows are two-over-two. Side entrance on south side is sheltered by a shed roof on brackets. (cont'd)				5 Other Name(s) 950 Schoettler Road
13 History and Significance The present owner of this house is the grandson of August Hill of Hilltown, who acquired the whole east side of Schoettler Road between Olive and Conway Road sometime before 1862. Hill is said to have come to Chesterfield as early as 1837, and he ran a blacksmith shop on Olive. The crossroads settlement of Bellefontaine was also called Hilltown for him. In his will, dated September 10, 1889, he refers to (continued)				
14 Description of Environment and Outbuildings Unpainted vertical board barn is located behind the house. It has a front gable with lean-to sides. The house stands at the top of a steep grass terrace overlooking the road, and it has large old pine trees in front.				
15 Sources of Information St. Louis County Probate Court, 783, 1226, 4304. St. Louis County Recorder of Deeds, Book 71, p. 228.				6 Prepared by Esley Hamilton
46. Organization St. Louis County Parks				
47. Date 48. Revision Date(s) 8/89				

Photo

Edward F. Hill House
950 Schoettler Road

42. continued

The house has three brick chimneys, one in the center of the front block and two in the rear wing.

43. continued

himself as "August Hill of Hilltown." He died the following year, leaving a widow Maria E. (who died in 1895) and seven children: sons John J., Charles M., George C., Andrew J. V., and Ernst F.; and daughters Mary Eisenhardt and Augusta L. Yokel. John died about the same time, leaving a widow and three children. In the family settlement of the estate, this property, then 21.60 acres, when to Ernst, the youngest son, and he probably built the house at that time. It is indicated in the 1909 atlas and described as the family homestead in Ernst's 1915 probate records. He left a widow Mary and sons August E. (died 1979), Ernst V. (died 1968) and George E. George and his wife still own this property.

AUG. HILLS ESTATE


MATCH

363.25'
SL-AS-020-084

909

SHOETTLER

PEACH HILL 24' W. COURT

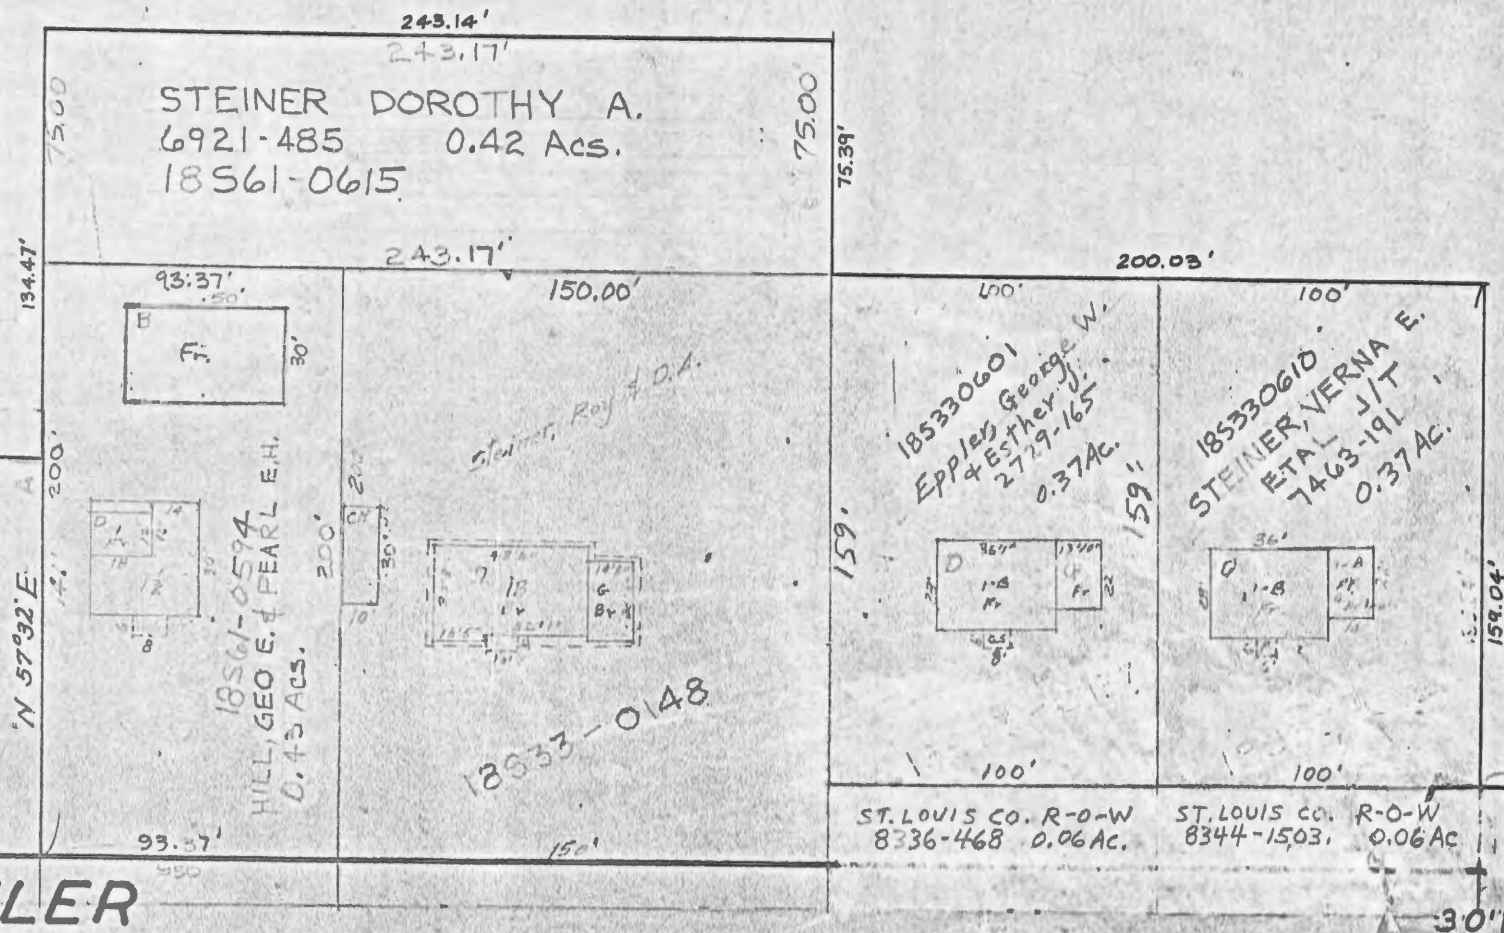



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-085

1 No 18S330061	4 Present Name(s) Kardell Stemme House		1 No
2 County St. Louis	5 Other Name(s)		
3 Location of Negatives 34082-22	1091 Schoettler Road		

6 Specific Location .48 acre 10-45-4 112.20 ft. NW of N line of Conway Road	16 Thematic Category 17 Date(s) or Period constructed c. 1940	28. No. of Stories 1-1-1 29. Basement? Yes ☒ No ☐	2 County St. Louis
7 City or Town II Rural, Township & Vicinity Chesterfield	18. Style or Design Vernacular 49	30. Foundation Material concrete block 65	
8 Site Plan with North Arrow	19. Architect or Engineer	31. Wall Construction frame WU	
	20. Contractor or Builder	32. Roof Type & Material 16 GB cross gable, comp 68	
	21. Original Use, if apparent residence OIA	33. No. of Bays Front irr. 4 Side irr.	
	22 Present Use residence	34. Wall Treatment vinyl siding 99	
	23 Ownership Public ☐ Private ☒	35. Plan Shape irregular	
	24. Owner's Name & Address, if known A. & O. Investments Ltd. 1850 Craigshire Rd., Suite 203	36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐	
	25. Open to Public? 63146 Yes ☐ No ☒	37. Condition Interior _____ Exterior good	
	26. Local Contact Person or Organization	38. Preservation Underway? Yes ☐ No ☒	

9 Coordinates UTM Lat _____ Long _____	10. District 11. Is II Eligible? Yes ☐ No ☐	39. Endangered? By What? Yes ☐ No ☒	4 Present Name(s) Kardell Stemme House
10 Name of Established District	12 Is II Eligible? Yes ☐ No ☐	40. Visible from Public Road? Yes ☒ No ☐	
13 History and Significance	14. District Potent'l? Yes ☐ No ☒	41. Distance from and Frontage on Road /90	


42 Further Description of Important Features The foundation is made of concrete block shaped to look like rock-faced ashlar. Windows vary in shape and style, but many are three-over-one. The main house is basically L-shaped, with a one-bay gabled wing to the front and a two-bay wing to the south. The entry bay has a terrace in front. The door has a broad surround and a fanlight inset into the door.	Photo	5 Other Name(s) 1091 Schoettler Road
43 History and Significance This house sits on part of a larger tract of land owned by the Giesler family since before 1870. In 1913 Louis H. and Odillia M. Giesler sold a tract of 9.98 acres to Fred J. Ravens, and Ravens sold off a series of lots including this one in the 1930's. The corner of Conway Road went to Ethel M. Schneider in 1937. The northernmost lot went to Fred M. Haas (1045 Schoettler Road), then the next south in 1938 to Curtis A. and Veronica S. Femmer. This lot was sold to Kardell Stemme in 1940, and the house was		
44 Description of Environment and Outbuildings This row of early suburban houses is now backed by the large office development at the corner of Olive and U.S. 40.		

45 Sources of Information St. Louis County Recorder of Deeds, Book 329, p. 419; 1526, 35; 1599, 631; 8476, 2342 & 2343; 1286, 594; 1431, 232.	46. Prepared by Esley Hamilton
	47. Organization St. Louis County Parks
	48. Date 8/89

Kardell Stemme House
1091 Schoettler Road

43. continued

probably built at that time. The house was occupied by his wife Mabel until her death in 1988, and sold by their daughter Mary Kathryn Stemme Carver in 1989 to the present owners.

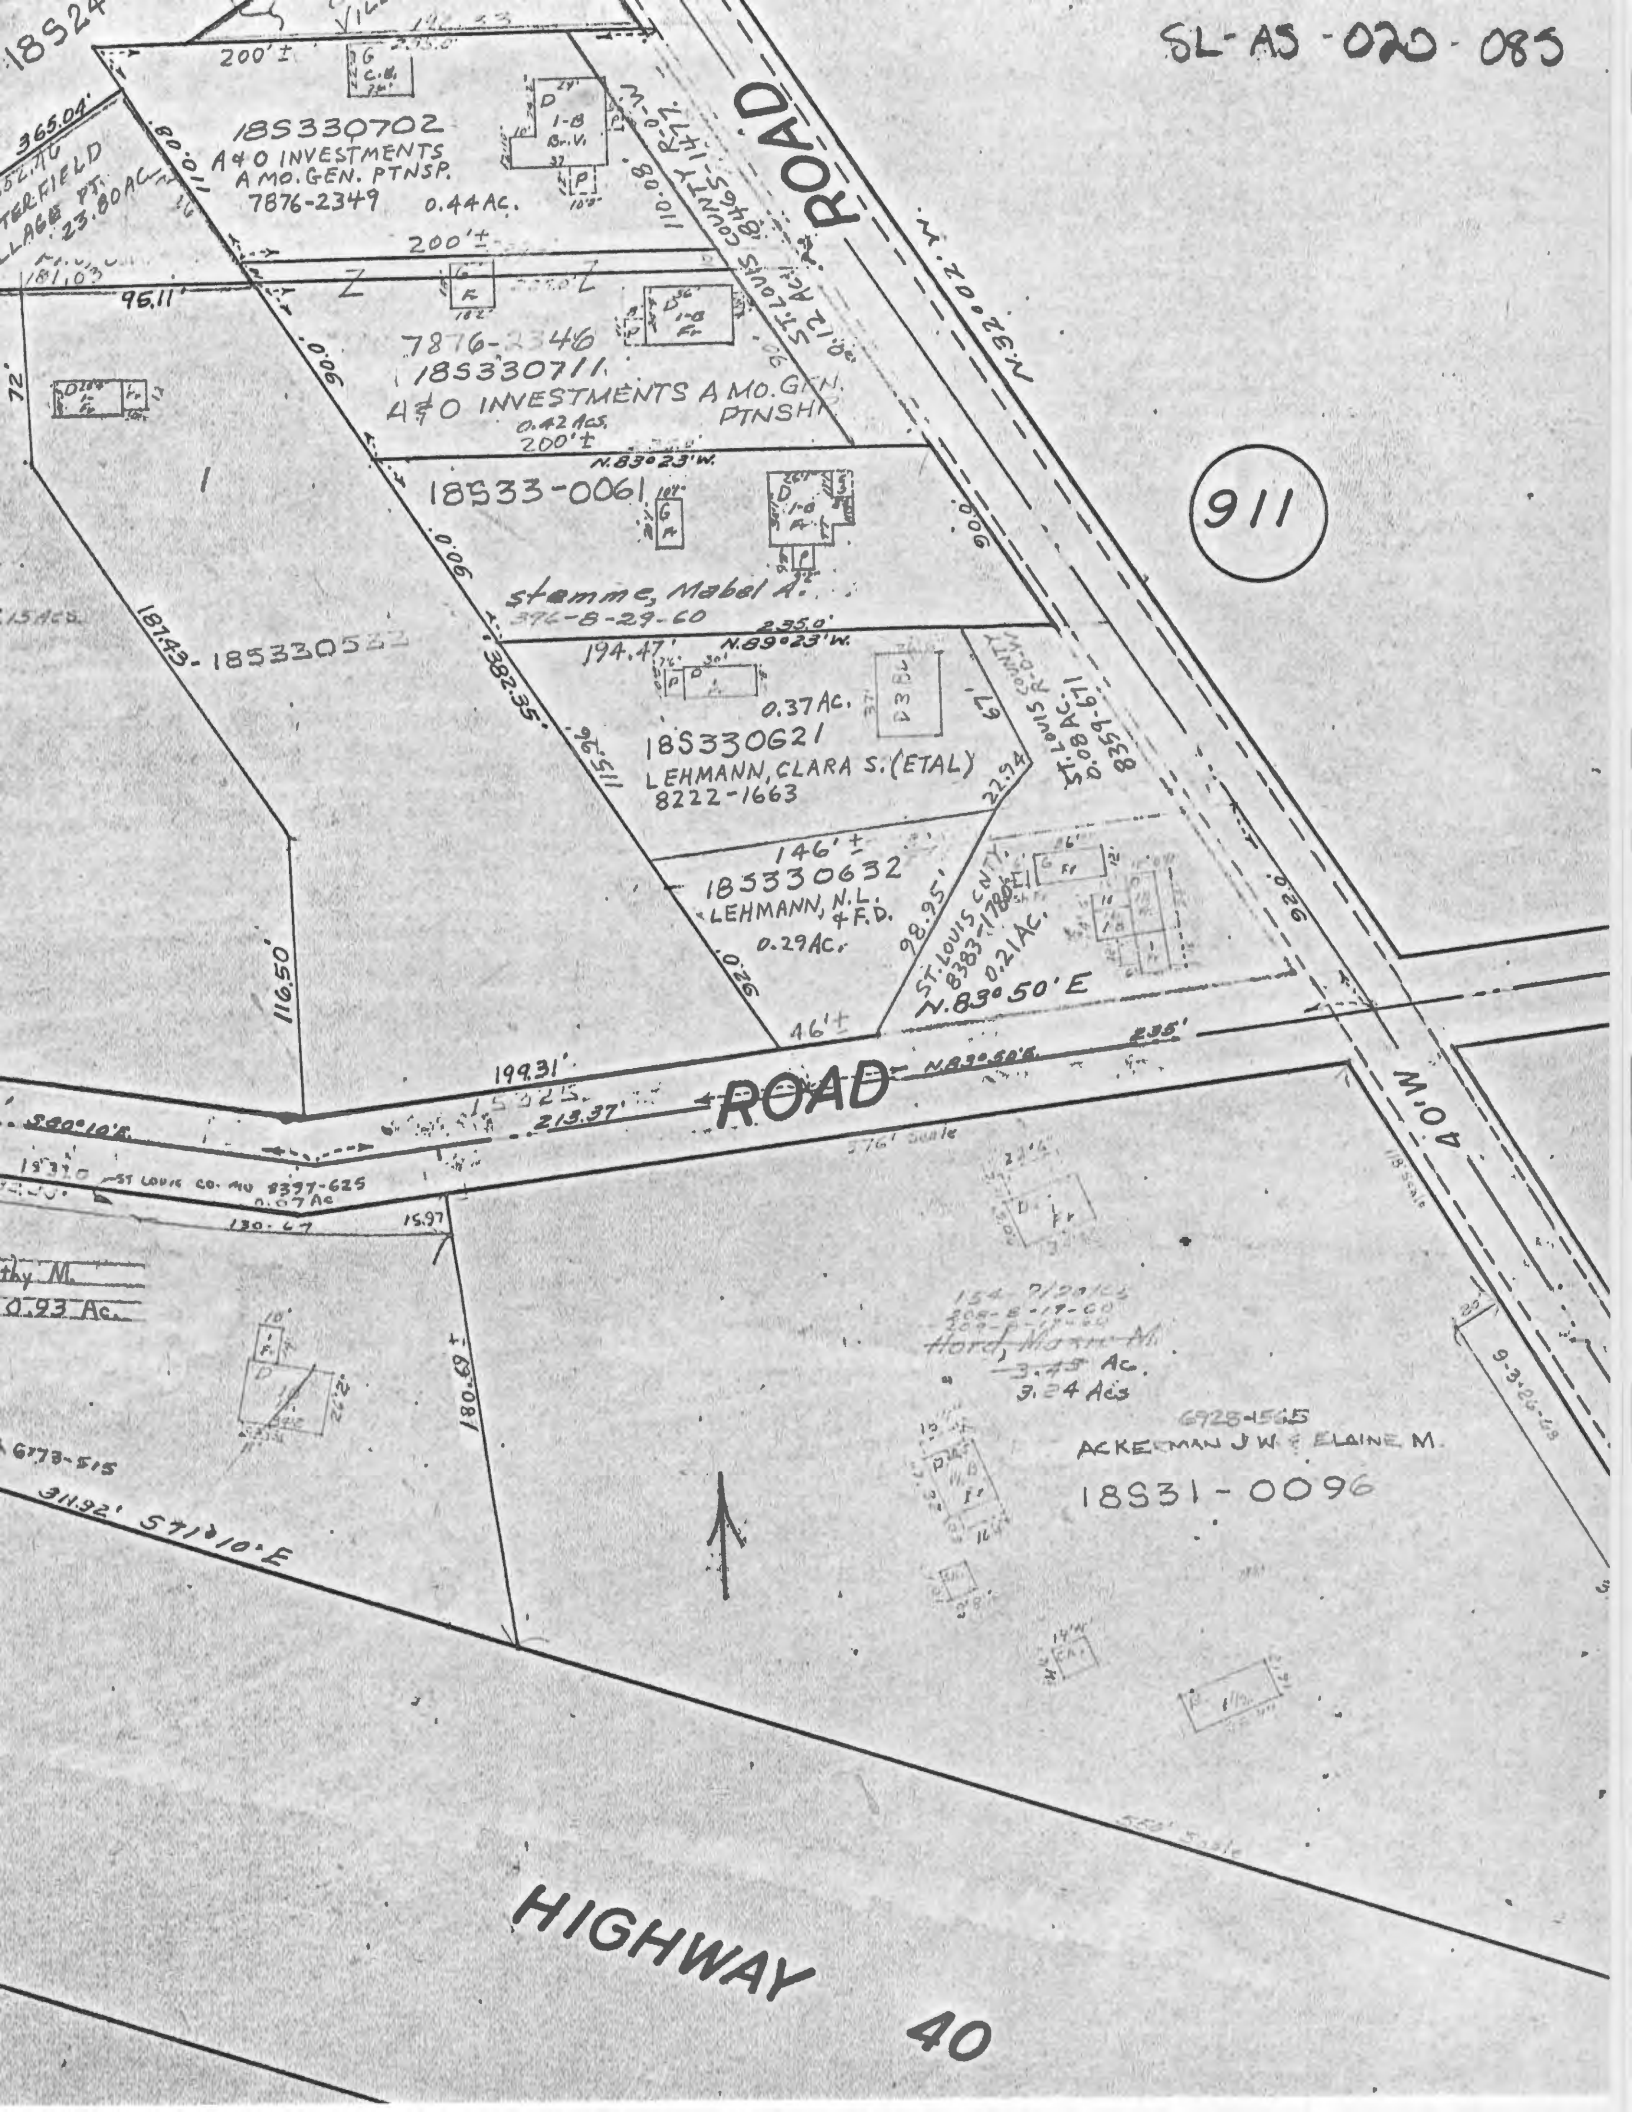

911

ROAD

HIGHWAY

40



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-086

1 No 20R310137		4 Present Name(s) Stafford-Blank House		1 No	
2 County St. Louis		5 Other Name(s)			2. County St. Louis
3 Location of Negatives 33015-30		2349 Schoettler Road			
5 Specific Location 14.25 acres in 24-45-4, at northwest corner of Clayton & Schoettler Roads		16. Thematic Category		5. Present Name(s) Stafford-Blank House	
		17 Date(s) or Period constructed c. 1875			
		18. Style or Design vernacular 07			
		19. Architect or Engineer			
7 City or Town If Rural, Township & Vicinity Chesterfield		20. Contractor or Builder		2. County St. Louis	
4 Site Plan with North Arrow		21. Original Use, if apparent residence 01A			
		22 Present Use residence			
		23 Ownership Public ☐ Private ☒			
9 Coordinates UTM Lat Long		24. Owner's Name & Address, if known Edwin Henry Mertz et al 114 Vlasia Dr. Ballwin 63011		5. Present Name(s) Stafford-Blank House	
0 Site ☐ Building ☒ Structure ☐ Object ☐		25. Open to Public? Yes ☐ No ☒			
1 On National Register? Yes ☐ No ☒		26. Local Contact Person or Organization			
2 Part of Estab Hist Dist? Yes ☐ No ☒		27. Other Surveys in Which Included			
15 Name of Established District		28. No. of Stories 1½		2. County St. Louis	
		29. Basement? Yes ☒ No ☐			
		30. Foundation Material stone 40			
		31. Wall Construction frame wu			
		32. Roof Type & Material K cross gable, comp.		5. Present Name(s) Stafford-Blank House	
		33. No. of Bays Front 3 Side 2/3			
		34. Wall Treatment 64 asbestos shingle			
		35. Plan Shape L-shaped			
		36. Changes (Explain in #42) pond R1 Addition: ☒ Altered ☒ Moved ☐		5. Present Name(s) Stafford-Blank House	
		37. Condition Interior Exterior good			
		38. Preservation Underway? Yes ☐ No ☒			
		39. Endangered? By What? Yes ☐ No ☒			
		40. Visible from Public Road? Yes ☒ No ☐		5. Present Name(s) Stafford-Blank House	
		41. Distance from and Frontage on Road			
		Photo			
12 Further Description of Important Features The L-shaped front of this house has a two-bay porch or verandah sheltering the front door and one window. This and other front windows have non-working shutters. A second door, opens onto the porch from the side of the front-facing gable. Windows are mostly two-over-two. The porch has turned posts and returns with small brackets.					
13 History and Significance Historically this was a parcel of three acres south of U.S. Survey 412 on the west side of Schoettler Road, a little north of Clayton Road (which used to be called Smith Road at this point). Why it was cut out of the surrounding Section 24 is not known. It was acquired before 1862 by John Buford, who owned a lot more land to the east, and was sold by him in the 1870's to Willis Stafford. A house is shown on the site in the 1878 atlas. After Stafford's death, the property was sold (continued)					
14 Description of Environment and Outbuildings A barn is located southwest of the house, and other farm buildings are north of the house. The grounds are still wooded, but this is at an important intersection with Clayton Road, and redevelopment cannot be far in the future.					
15 Sources of Information William L. Thomas, History of St. Louis County (1911), pp. 180-181. St. Louis City Recorder of Deeds, Book 468, p. 388. St. Louis County Recorder of Deeds, Book 43, p. 86. St. Louis County Probate Court, #2942, 41888.					
46. Prepared by Esley Hamilton					
47. Organization St. Louis County Parks					
48. Date 8/89 49. Revision Date(s)					

1 No
2. County
St. Louis
5. Present Name(s)
Stafford-Blank House
5. Present Name(s)
Stafford-Blank House
5. Present Name(s)
Stafford-Blank House

Stafford-Blank House
2349 Schoettler Road

43. continued

by his widow Eliza and children John, Ellen and Henry in 1889 to Mary Blank. She was the former Mary Bopp, member of a well-known pioneer family and wife of John or Johann Blank, a German immigrant. By 1909, she had deeded or bequeathed this property to her only son Henry Blank, a native of Bonhomme Township, born in 1869. Johann Blank's farm of about 130 acres was just north of here on both sides of Schoettler Road. He died in 1909. This neighborhood was called Oak Grove or Stringtown, centering at the intersection of Clayton and Baxter Roads. Henry was a founder of the All Time Farmers Club in 1889 and the Woodmen of the World in 1893. He married Mary Theresa Zuppenfeld in 1895. He died in 1937 and she in 1946. Their children were Henry Louis Blank (died 1956), Joseph John Blank (died 1969, age 69), and Rita, who married Clarence Lee Shotwell (died 1947).

SL-AS-020-086

TTLER

359.75

STA. 5

STA. 2+70

STA. 2

277

STA. 1

STA. 0+80

40' W

STA. 0+00

411.45

409.20

ROAD

WEAUS LOUIS 286-285 47-451
233.11 0745
233.11 0745

384.12'

385

PT. SEC. 24 T. 45 N. R. 4 E.



SL-AS-020-087

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 19S330017 2 County St. Louis 3 Location of Negatives 34363-9	4 Present Name(s) Eberwein Cemetery 5 Other Name(s) Squires Way Court	1 No				
6 Specific Location 1.01 acres in pt. of Lot 1 Henry Eberwein SD sur. 1978 7 City or Town II Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow	16 Thematic Category 17 Date(s) or Period established by 1868 18 Style or Design 19 Architect or Engineer 20 Contractor or Builder 21 Original Use, if apparent cemetery 07B 22 Present Use unused 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known	2 County St. Louis				
9 Coordinates UTM Lat Long 10 Site ☐ Structure ☐ Building ☐ Object ☐ <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border-right: 1px solid black; padding: 2px;"> 11 On National Register? Yes ☐ No ☐ </td> <td style="width: 50%; padding: 2px;"> 12 Is It Eligible? Yes ☐ No ☐ </td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;"> 13 Part of Estab Hist Dist? Yes ☐ No ☐ </td> <td style="padding: 2px;"> 14 District Potent'l? Yes ☐ No ☐ </td> </tr> </table> 15 Name of Established District	11 On National Register? Yes ☐ No ☐	12 Is It Eligible? Yes ☐ No ☐	13 Part of Estab Hist Dist? Yes ☐ No ☐	14 District Potent'l? Yes ☐ No ☐	36 Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐ 37 Condition Interior _____ Exterior _____ 38 Preservation Underway? Yes ☐ No ☐ 39 Endangered? By What? Yes ☐ No ☐ 40 Visible from Public Road? Yes ☐ No ☐ 41 Distance from and Frontage on Road 280 ft.	4 Present Name(s) Eberwein Cemetery
11 On National Register? Yes ☐ No ☐	12 Is It Eligible? Yes ☐ No ☐					
13 Part of Estab Hist Dist? Yes ☐ No ☐	14 District Potent'l? Yes ☐ No ☐					
42 Further Description of Important Features The cemetery is on a high point of ground, created partly by adjacent regrading. It is thickly overgrown with trees and shrubs. The stones are broken and scattered, and a considerable amount of modern litter is evident. The most important monument is the one of Heinrich C. Eberwein and his wife Charlotte, which has beautifully cut inscriptions in German on two sides. It was originally topped by an obelisk, which is still lying nearby. 43 History and Significance Heinrich or Henry Eberwein bought all of Survey 1978 (431.54 acres) in 1835. He died in 1888. In his will he provided for the division of his property among his six children and one grandchild. Lot 1 of Survey 1978 went to Edward Eberwein, and Henry mentioned that this part included the family graveyard. The graveyard is also depicted in the 1909 county atlas. The oldest burial for which the stone survives (cont'd) 44 Description of Environment and Outbuildings This cemetery sits in the middle of common lands controlled by the trustees of Bridle Creek Plot 3. It is accessible only through private yards of houses facing Schoettler Valley Drive, Squires Way Court, and Ridge Drive.		5 Other Name(s) Squires Way Court				
45 Sources of Information St. Louis Genealogical Society, Old Cemeteries, St. Louis County, Missouri Vol. II (1983), p. 117. St. Louis County Probate Court, #613. St. Louis City Recorder of Deeds, Book U, p. 524.		46 Prepared by Esley Hamilton 47 Organization St. Louis County Parks 48 Date 9/89 49 Revision Date(s)				

Eberwein Cemetery
Squires Way Court

43. continued

is that of Henry Eberwein's wife Christiane, who was born in Grumbach, Prussia, in 1820 and died in 1868. This explains his concern that the cemetery be preserved.



ST. LOUIS COUNTY
REVENUE TECHNICAL SERVICES
DIVISION OF MAPPING

MAP NO. 19-S

THIS MAP UPDATED:
13-JUL-1989 10:30

St. Louis Genealogical Society, Old Cemeteries, St. Louis County
Volume II (1983), p. 117

EBERWEIN CEMETERY

Harry and Jacqueline Hunt Whitworth

Virtually in the heart of a subdivision, on the crest of a hill behind houses on Schoettler Valley Road (a continuation of Country Ridge Drive off of Baxter Road). Copied by the Whitworths in November 1982, this cemetery was apparently in a rapidly-deteriorating condition. It had been vandalized.

EBERWEIN, Christiane wife of H. G.

born Grumbach Preussen 22 Sep 1820
died 5 April 1868

Heinrich C.

born Goettingen Preussen 22 Oct 1805
died 14 Mar 1858 - should be 1888

Lavinia 28 Jun 1891 - 18 Jul 1891

Arthur F. (piece of stone)

Pieces of stones:

- Charlotte
- Catherine 56y

Flap

- Ch - r

Foot marker: T. E. R.

born 6 Nov - died 22 Feb 1895

SCHNEIDER, Johanna nee Sahn 23 Feb 1833 - 23 Jan 1881

Gustav 9 Mar 1864 - 22 Jan 1881

Carl son of G. & J. 10 Jan 1869 - 14 Mar 1888

WOERTHER, Susan wife of Henry died 28 Nov 1877

* * *

HENCKEN FAMILY

Merle M. Jackson, William Blair, and L. E. Kennedy

This family cemetery is on property known as the old Hencken farm, located about 4/10 of a mile south of the junction of Manchester and Hencken Roads. It is (or was) east of Hencken Road, and was unfenced when visited in March, 1976. At that time it was in good condition.

HENCKEN, Diederich

31 Aug 1827 - 11 Dec 1896

very small marker

Joannie, beloved wife of Diederich 27 Feb 1824 - 26 Oct 1896 very small marker

Johanna 3 Aug 1858 - 29 Dec 1928 large marker

* Rosamond cremated, ashes placed here 3 Sep 1969

Oscar -

Eugene - no markers. Information from Mr. Blair, present owner of the farm

From a Funeral Memorial Booklet also owned by Mr. Blair:

Eugene Hencken was born 23 Mar 1887, died 12 Dec 1961. Cremated, ashes buried.

Oscar G. Hencken was born 3 Jul 1880, died 21 Feb 1947.

* Rosamond Hencken, wife of Eugene, born 16 Jun 1898.

* * * *



1 No 20U310215		4 Present Name(s) Samuel A. Stuart House, "Pleasant Valley Farm"		1 No
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives		2261 Valley Road		
6 Specific Location 1 acre, Lot 1, Pleasant Valley Meadows Addition		16. Thematic Category		2. County St. Louis
		17 Date(s) or Period constructed 1913		
7 City or Town If Rural, Township & Vicinity Meramec Township		18. Style or Design vernacular 18		4 Present Name(s) Samuel A. Stuart House, "Pleasant Valley Farm"
8 Site Plan with North Arrow		19. Architect or Engineer		
9 Coordinates UTM Lat Long		20. Contractor or Builder		5 Other Name(s) 2261 Valley Road
		21. Original Use, if apparent residence 01A		
		22 Present Use residence		
		23 Ownership Public ☐ Private ☒		
10		24. Owner's Name & Address, if known Raymond and Mary Joseph		6. Other Name(s)
11		25. Open to Public? Yes ☐ No ☒		
12		26. Local Contact Person or Organization		7. Other Name(s)
13		27. Other Surveys in Which Included See attached		
14		28. No. of Stories 2		8. Other Name(s)
15		29. Basement? Yes ☒ No ☐		
16		30. Foundation Material concrete 65		9. Other Name(s)
17		31. Wall Construction frame 1111		
18		32. Roof Type & Material gable, comp. 68 63		10. Other Name(s)
19		33. No. of Bays Front 2 Side irr.		
20		34. Wall Treatment asbestos shingle 69		11. Other Name(s)
21		35. Plan Shape irregular		
22		36. Changes (Explain in #42) poth FU Addition ☒ Altered ☒ Moved ☐		12. Other Name(s)
23		37. Condition Interior Exterior good		
24		38. Preservation Underway? Yes ☐ No ☒		13. Other Name(s)
25		39. Endangered? By What? Yes ☐ No ☒		
26		40. Visible from Public Road? Yes ☒ No ☐		14. Other Name(s)
27		41. Distance from and Frontage on Road 413		
12 Further Description of Important Features The house has the main gable to the front and a smaller gable on the south side. The front porch is screened. It has square posts and balustrade, a hipped roof, square balusters, and squared lattice work beneath the flooring. Windows are one-over-one. A two-car garage is attached to the southwest corner of the house.				
13 History and Significance This property is well known because of the Stuart Log Cabin that sits northeast of the main house. Samuel Stuart came to St. Louis in 1827, according to family history. The log house is said to have been built in 1832, but Stuart did not acquire his first land in the area until 1835. That was a quarter of southeast quarter of Section 19, acquired directly from the U.S. government. The house, however, sits on a (cont'd)				
14 Description of Environment and Outbuildings The farm has been divided into building lots, and even the lot around the old house has been subdivided. The original yard still has a picket fence and concrete gateposts. The most important feature of the yard is the remnant of the original log cabin. The hewn logs are v-notched and chinked with concrete. (cont'd)				
15 Sources of Information Chylene Jahn Daub, Golden Anniversary of Ellisville (1983), pp. 50-51, 206-209. John Lindenbusch, draft historic inventory form 1981. Frances Stuart, draft National Register nomination, 1982 continued				
46. Prepared by Esley Hamilton				
47. Organization St. Louis County Parks				
48. Date 9/89				
49. Revision Date(s)				

Samuel A. Stuart House, "Pleasant Valley Farm"
2261 Valley Road

27. continued

1965 St. Louis County Historic Buildings Commission survey 100 Historic Buildings in St. Louis County (1970)

East-West Gateway Coordinating Council Historic Sites Inventory, no. 717.

Missouri Historic Sites Catalogue (1963), p. 163.

Historic Buildings in St. Louis County (1983)

43. continued

part of Section 20 which was not acquired by Stuart until the following year and had originally been granted to William S. Holloway. This probably moves the correct date of the house back to 1836 or later. The cabin was eventually expanded to six rooms, but it was reduced to its present two-room size in the 1940's. The cabin was nominated to the National Register of Historic Places in 1982 but not approved by the State Advisory Council. Samuel Stuart married Adeline Shepard in 1831, and they had a total of eleven children. One of them, Dr. Samuel Aurelius Stuart (1849-1939), called "Bub," continued to live here. He was a veterinarian. He married Dora Williamson in 1896, and in 1913 they built the new house. Their daughter Jessie Adeline Stuart (born 1898) married Charles Schroeder in 1924. Jessie's cousin Frances Rachel Stuart joined her here in 1972; she was a great-granddaughter of the founder and in the 1980's she sold the property and moved away. The current subdivision behind the house retains the name "Pleasant Valley." The main barns were on the east side of the road. They have been demolished for another subdivision.

44. continued

A footing of concrete has been created to protect against rotting. A three-panel door, with a large light in the upper panel, is hung in the entrance on the south wall. A double-hung window, with six-over-six lights, is on the east side of that doorway. Another entry, located on the north side of the east wall, has a vertical-board door. This doorway originally offered a means of passage to the two-story, log addition which was demolished in the 1940's. The chimney on the east side of the present cabin is stone up to the top of the log wall. It is brick above that elevation. The fireplace which heated the room on the ground floor of the two-story section is intact. A circular opening in the stone above the fireplace indicates the substitution of a stove for the fireplace as the method of heating the two-story unit. A third entrance to the cabin is located on the north wall. It originally faced a detached kitchen and became an interior doorway when the space between the cabin and the kitchen was enclosed. Demolition of the kitchen and room

2261 Valley Road

44. continued

between it and the cabin in the 1940's caused the doorway to again become an exterior feature. There is now a modern, four-panel door hung there. Notches meant to receive the joists for the ceiling of the room at the rear of the cabin are still present. They are in the log which is immediately below the log which bears the present joists for the cabin ceiling. The west wall has a four-light window in the weatherboarded gable. Work carried out in the 1940's reduced the height of the upper room of the cabin. The old roof and the uppermost logs were then found to have deteriorated. Four logs were therefore removed from each wall and a new roof was placed on the truncated cabin. The decrease in the height of the south wall also caused the loss of a four-light window. Sheet metal roofing was reported in use in 1965. It has since been replaced by cedar shakes. The interior of the gables and the ceiling of the loft are covered with dark-brown, wood paneling. The floor is of wide planks which rest on hewn joists. The joists are exposed on the ground floor. The loft is reached by a stair which begins in the southwest corner and is attached to the west wall. A section of the old interior plastering has been preserved on the south wall at the base of the stair. It is protected by glass and shows that grape vines were affixed to the wood before the plaster was applied. The lower level has a concrete floor which has been grained to simulate oak. The fireplace on the east wall has a brick mantel which was built recently as a replacement for the earlier wooden mantel. Vertical board siding has been used to enclose the space beneath the stair, creating two closets on the north wall of the cabin. A cellar was reported to have existed in 1915. It must have been under one of the two sections which were demolished in the 1940's.

45. continued

Frances R. Stuart, The Mixed-up House of Stuarts (n.p., n.d.).
Catherine Jolly Pratt et al, City of Ellisville (n.p. 1976), p. 46-47.
Helen Davis, "Stuart Log Cabin", Along the Trail, II (August 1972)
Thomas, History of St. Louis County (Clayton, MO 1910) II, p. 37-38.

4-5/3122G

1989

SL-AS-000-088

VALLEY ROAD

2261





Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65102
HISTORIC INVENTORY SL-AS-020-089

1 No. 21V340015		4 Present Name(s) Henry Jacob, Junior, House	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives 34363-19		2633 Valley Road	
6 Specific Location 10 acres, NW part of Lot 3, Springer-Boylan SD, in Section 29 T45, R4		16 Thematic Category	
		17 Date(s) or Period constructed c. 1890	
		18 Style or Design Queen Anne 07	
		19 Architect or Engineer	
7 City or Town If Rural, Township & Vicinity Meramec Township		20 Contractor or Builder	
8 Site Plan with North Arrow		21 Original Use, if apparent residence OHA	
		22 Present Use residence	
		23 Ownership Public ☐ Private ☒	
		24 Owner's Name & Address, if known Roy Pfautch 52 Portland Place St. Louis, MO 63108	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included	
12 Is Eligible? Yes ☐ No ☐			
13 Part of Estab Hist Dist? Yes ☐ No ☒			
14 District Potent'l? Yes ☐ No ☒			
15 Name of Established District		28 No. of Stories 2	
		29 Basement? Yes ☒ No ☐	
		30 Foundation Material stone 40	
		31 Wall Construction frame WH	
		32 Roof Type & Material 16 cross gable, metal 50	
		33 No. of Bays Front 3 Side 2	
		34 Wall Treatment 21 22 clapboard, shingle	
		35 Plan Shape L	
		36 Changes (Explain in #42) <u>prch</u> Addition: <u>OH</u> Altered: <u>OH</u> Moved: <u>OH</u>	
		37 Condition Interior Exterior good	
		38 Preservation Underway? Yes ☐ No ☒	
		39 Endangered? By What? Yes ☒ No ☐ development	
		40 Visible from Public Road? Yes ☒ No ☐	
		41 Distance from and Frontage on Road	
42 Further Description of Important Features The L-shaped front of house has front-facing gable to right, with sawtooth-patterned shingles in gable. Front windows below this are narrow one-over-one and paired. Other windows are mostly two-over-two. Some have recent shutters. The front porch has square posts and a flat roof with x-patterned balustrade. An end chimney is brick.			
43 History and Significance Henry Jacob is said to have come to this area from Prussia in 1870 at the age of 45. Among his eight children was Henry, Junior, who acquired this farm. He died in 1912, leaving a son, George, and four daughters, of whom the youngest was only 9.			
44 Description of Environment and Outbuildings House faces at an angle to the road and has two red-painted barns behind it. Grounds have recently become overgrown.			
45 Sources of Information Chylene Jahn Daub, Golden Anniversary of Ellisville (1983), p. 41. St. Louis County Probate Court, 3617.		46 Prepared by Esley Hamilton	
		47 Organization St. Louis County Parks	
		48 Date 8/89	
		49 Revision Date(s)	

1 No
 2 County
 St. Louis
 4 Present Name(s)
 Henry Jacob, Junior, House
 5 Other Name(s)
 2633 Valley Road

REDRAWN
SEE

SL-AS 020-089
6.594 AC. Pt. of 5'

Clarkson Valle Estates, Inc.
21 120.20 AC.

BARNES, Robert

2
27.94 AC.
52.42
N 89° 30' E 369.51'

S 51° E
245'

S 29° 08' E 670'
115-1079/63

N 89° 30' E 369.51'

S 89° 30' W
364.51'

N 40° 26' W 120.81'

40' W.

PT. CHESTER
PLAT
SEE PAGES
ST. LOUIS FEDSE

VALLEY


385.50'

3

PT. COMMON GROUND
PT. 21032-0563
PT. 8.061 AC.

WEST VLY. PLT. 1. A SEC. OF
VLY VIEW (TRS.)
7485-1376

8245-0170
PFAUTCH, Roy
21034-0015



420'

Z

Z

PT. C

PT.

CDDI



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65102

HISTORIC INVENTORY

SL-AS-020-090

1. No. 21U320590		4. Present Name(s) Oak Ridge School No. 2	
2. County St. Louis		5. Other Name(s) <i>rest entered</i>	
3. Location of Negatives 34363-21		2654 Valley Road	
6. Specific Location 1.22 acres Golfview Lots 2, 3, 4 & 5 & Resub Lot A		16. Thematic Category	
		17. Date(s) or Period school constructed 1909	
		18. Style or Design vernacular	
		19. Architect or Engineer	
7. City or Town If Rural, Township & Vicinity Clarkson Valley		20. Contractor or Builder	
		21. Original Use, if apparent school	
		22. Present Use residence	
		23. Ownership Public ☐ Private ☒	
8. Site Plan with North Arrow		24. Owner's Name & Address, if known Boatmen's Bank of O'Fallon 311 S. Main St. O'Fallon, MO 63366	
		25. Open to Public? Yes ☐ No ☒	
		26. Local Contact Person or Organization	
		27. Other Surveys in Which Included	
9. Coordinates UTM Lat _____ Long _____		28. No. of Stories 1 and 2	
10. Site: ☐ Building ☒ Structure: ☐ Object: ☐		29. Basement? Yes ☒ No ☐ partial	
		30. Foundation Material concrete	
11. On National Register? Yes ☐ No ☒		31. Wall Construction frame	
12. Is it Eligible? Yes ☐ No ☐		32. Roof Type & Material hip, gambrel, gable	
13. Part of Estab. Hist. Dist.? Yes ☐ No ☒		33. No. of Bays Front 3+ Side 3+	
14. District Potent'l? Yes ☐ No ☒		34. Wall Treatment aluminum siding	
15. Name of Established District		35. Plan Shape irregular	
		36. Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐	
		37. Condition Interior _____ Exterior good	
		38. Preservation Underway? Yes ☐ No ☒	
		39. Endangered? By What? Yes ☒ No ☐ vacant	
		40. Visible from Public Road? Yes ☒ No ☐	
		41. Distance from and Frontage on Road /259'	
42. Further Description of Important Features The original school, at the north end of the present complex, has a full hip roof topped by a large louvered cupola which has a pyramidal roof. The front entry has a gabled one-bay porch with square posts. Front windows are bowed and have twelve large panes. On the north side, the school wing now has three arched openings with French doors. The south side has a recent shed-roofed addition. It connects with the more recent parts of the residence, which include a gambrel-roofed two-story garage intended (con't)			
43. History and Significance The Oak Ridge School is said to date back to the 1830's. It was originally situated on Clarkson Road east of its present location. The school moved to the farm of Anthony Wilmas after the Civil War, and about a decade later another quarter mile west to the present location after Valley Road was laid out. The present building, with two classrooms, was erected in 1909.			
44. Description of Environment and Outbuildings The house is very close to the road, and the previous owners built a tall brick wall to screen it. This is extended by a well-designed iron fence, so the property is entered well south of the house through a gate with brick pylons. To the east the ground drops.			
45. Sources of Information Carolyn Jolly Pratt, <u>Ellisville Horizons</u> (1976), p. 28.		46. Prepared by Esley Hamilton	
		47. Organization St. Louis County Parks	
		48. Date 8/89	
		49. Revision Date(s)	

1 No
2 County
St. Louis

4 Present Name(s)
Oak Ridge School No. 2

5 Other Name(s)
2654 Valley Road

Photo

Oak Ridge School No. 2
2654 Valley Road

42. continued

to look like a barn. It has a V-shaped overhang in front, six-over-six windows, and two garage doors in front. A one-story wing south of this has a noarrow long shed-roof dormer and another two-window garage door. The southernmost portion of the house has a gable roof almost as high as and parallel to the barn roof. It has one-over-one windows with non-fitting shutters and on the south side two glass double doors opening onto a patio.



Oak Ridge School, now a private residence, located on Valley Road.

pington Estate. Later it was known as Ruwwe after Judge Francis Ruwwe on whose land it stood. In 1910, it was known as District No. 55 and later changed to District No. 4 in Township No. 44 Range 4. The officers for that year were Kenneth Shotwell, president; E. L. Ruwwe, clerk; Henry Vesper and John Mertz, directors. The building is now a private residence on Old State Road.

One of the earliest of the area schools was Oak Ridge. The school was organized sometime in the 1830's when the area was thinly populated. The first building was a one-room log house twenty feet square.

Some years later, the building was enlarged making it 40 feet long. It was situated on what is now Clarkson Road about a mile north of Manchester Road on a lot which was a part of the old Long tract. It was known as Long School commemorating both the name of the owner of the land and the shape of the building.

The schoolhouse was used for church services, Sunday School, singing school, debates, and other social events.

The first trustees were Samuel Stuart, Joseph Hardy, and Hypolite Tisson.

Among the first teachers was Mr. Philly Tippet, a one-armed man, noted for his ability to make goose-quill pens, which were the only ones used in those days. Mr. Tippet later became one of the most prominent citizens in the western part of the county.

Several Presbyterian ministers then served as teachers followed by William H. Stuart, son of

Samuel Stuart, and for many years County Commissioner of Washington County, Missouri schools.

During the Civil War a private school was taught in the Stuart home by a daughter, Miss Anna Stuart.

At the close of the war, the district was reorganized and the schoolhouse moved to a lot more centrally located, donated by Mr. Anthony Wilmas. The name of the school was changed to Oak Ridge School, because of the many beautiful oaks surrounding the school. Miss Rosetta Stuart was the first to teach in the new school. One of the contracts signed by Miss Stuart still survives, dated 1875 and signed by John W. Doss and Louis Vesper as commissioners.

Valley Road was laid out and passed about 1/4 mile west of the school. As there was no public road leading to it, Mr. Wilmas again offered a very desirable lot and the site was again changed and a one-room frame building built.

In 1909, it became necessary to build larger quarters and a two-room building was erected and two teachers employed.

In 1910 the board of directors were: Henry Heine-mann, president; S. A. Stuart, clerk; August Kleinsorge, director.

In 1930 the enrollment was 48.

The building is now a lovely private residence on Valley Road.

In the 1880's there was also a Catholic school on Old State Road known as Dr. 'hes'.



Old O.



Old Oak
the teach
is Elber
Berthold
Kalupo,
Bauer, (C
Caleb S
Clarence

RED
SEE

Clarkson Valle E 31° 12' 30" W

BATES, ROSE

SL AS-020-040

G. 599.4 Ac. pt. of

S 29° 08' E 670'
115-10-9/63

S 51° 0' E 245'

N 89° 30' E 369.51'

S 89° 30' W 264.51'

40' W

PT. CHESTER
PLA
SEE PAGES
ST. LOUIS FEDS

VALLEY

3

PT. COMMON GROUND
PT. 21432-0563
PT. 8.061 Ac.

CHEST VLY. PLT. 1. A SEC. OF
VLY VIEW (TRS.)
7485-1376

8245-0170
PFAUTCH, Roy
21234-0015



PT.

PT

SPRA



HISTORIC INVENTORY

1 No. 18T120025		4 Present Name(s) Laplante-Barner House		1 City St. Louis
2 County St. Louis		5 Other Name(s)		
3 Location of Negatives 77119-27		16120 Walnut Hill Farm Drive		
6 Specific Location 7.84 acres in Survey 2760, Township 45, Range 4		16 Thematic Category		28 No. of Stories 2
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period construction dates unknown		29 Basement? Yes ☒ No ☐
8 Site Plan with North Arrow		18 Style or Design vernacular 09		30 Foundation Material stone 40
		19 Architect or Engineer		31 Wall Construction frame, 109 LCWH
		20 Contractor or Builder		32 Roof Type & Material gable, comp. GBGBSD 63
		21 Original Use, if apparent farm 01A		33 No. of Bays Front 5 Side 4+
		22 Present Use farm		34 Wall Treatment clapboard 21
		23 Ownership Public ☐ Private ☒		35 Plan Shape irregular
		24 Owner's Name & Address, if known Eric James Haug et al		36 Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒		37 Condition Interior Exterior good
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		26 Local Contact Person or Organization		38 Preservation Underway? Yes ☐ No ☒
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included		39 Endangered? By What? Yes ☐ No ☒
12 Is It Eligible? Yes ☐ No ☒				40 Visible from Public Road? Yes ☒ No ☐
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒				41 Distance from and Frontage on Road
14 District Potent'l? Yes ☐ No ☒				
15 Name of Established District				
42 Further Description of Important Features The farmhouse is exceptionally large for this area. It has a New England look at present, with a white pilastered and pedimented doorway flanked by carriage lights, and with a series of telescoping additions to the rear. The 1½-story older rear wing has a gabled "additional" dormer and a fairly steep roof. The outer 1-story wing has 3 bays under a broad shed roof. Windows are 2-over-2. There are 3 chimnies, 2 apparently centered on either side of the center hall, and 1 at the end of the first wing.		Photo		5 Other Name(s) 16120 Walnut Hill Farm Drive
43 History and Significance This survey, #2760, was granted for New Madrid Certificate 245, issued to Joseph Laplante to compensate him for land lost in the great earthquake of 1811. Laplante died before January 9, 1829, the date the probate court granted his estate. Apparently Laplante's heirs were not able to make this property pay, and it was sold by the sheriff in a series of tax sales. Reuben L. Long, the youngest son of pioneer				
44 Description of Environment and Outbuildings Walnut Hill Farm Drive is a private lane angling southwest off Wilson Road, which this farm overlooks. The front pasture has a striking board-rail fence. The outbuilding nearest the house has a pedimented gable.				
45 Sources of Information St. Louis City Probate Court, 816 St. Louis County Probate Court, 10835 St. Louis City Recorder of Deeds, Book G ³ , page 52; E ⁴ , 390; R ⁵ , 261 St. Louis County Recorder of Deeds, Book 14, page 194; 17, 54; 17, 287; 241, 136; 279, 571; 6281, 830; 7900, 132		46 Prepared by E. Hamilton		
		47 Organization St. Louis County Parks		
		48 Date 8/88		49 Revision Date(s)


Laplante-Barner House
16120 Walnut Hill Farm Drive

42. continued

The front part of the house is structurally a two-story dog-trot log cabin. One room inside has the logs exposed. Since the accompanying photo was taken, a two-story front porch has been added, inspired by the pedimented porch of "Thornhill," the home of Missouri Governor Frederick Bates, now located in Faust Park.

43. continued

Lawrence Long, was able to reassemble full title to the survey between 1843 and 1847. Thereafter the chain of title has not proved traceable until 1881, when 113 acres of the survey were sold by the sheriff for back taxes. The defendants seem to have been the original Laplante descendants, including 20 people with the surnames Grimard, Henry, Defoe, Kames, Weir, Mills, and Pryor. The tract was acquired by Johann Georg Aff for \$230. He sold it a few months later to Emil Dosenbach for \$316. Dosenbach was able to get \$1400 for it early in 1882, when he sold it to Christian Barner (not Barnett). Barner sold a few acres over the years and then the remaining 103 acres in 1911 to Edward Steiner. The price then was \$7,000. Steiner died in 1933, still owning this property and leaving a widow Katie, 4 sons and a daughter. The family seems to have held on to much of this property for many years, selling part to August Griffith in 1945 and part to Floyd L. Key in 1951. The Seabaugh family bought the smaller tract with the house, and in 1980 Muriel M. Seabaugh sold it to Carl R. Luem. He moved to Santa Ana, California, a few years later and sold this to the present owners, Eric James Haug and Lauren Strutman. Although the early history of this property is cloudy, the log portion may go back to the time of Laplante. Probably the house was modernized by Barner or Steiner.

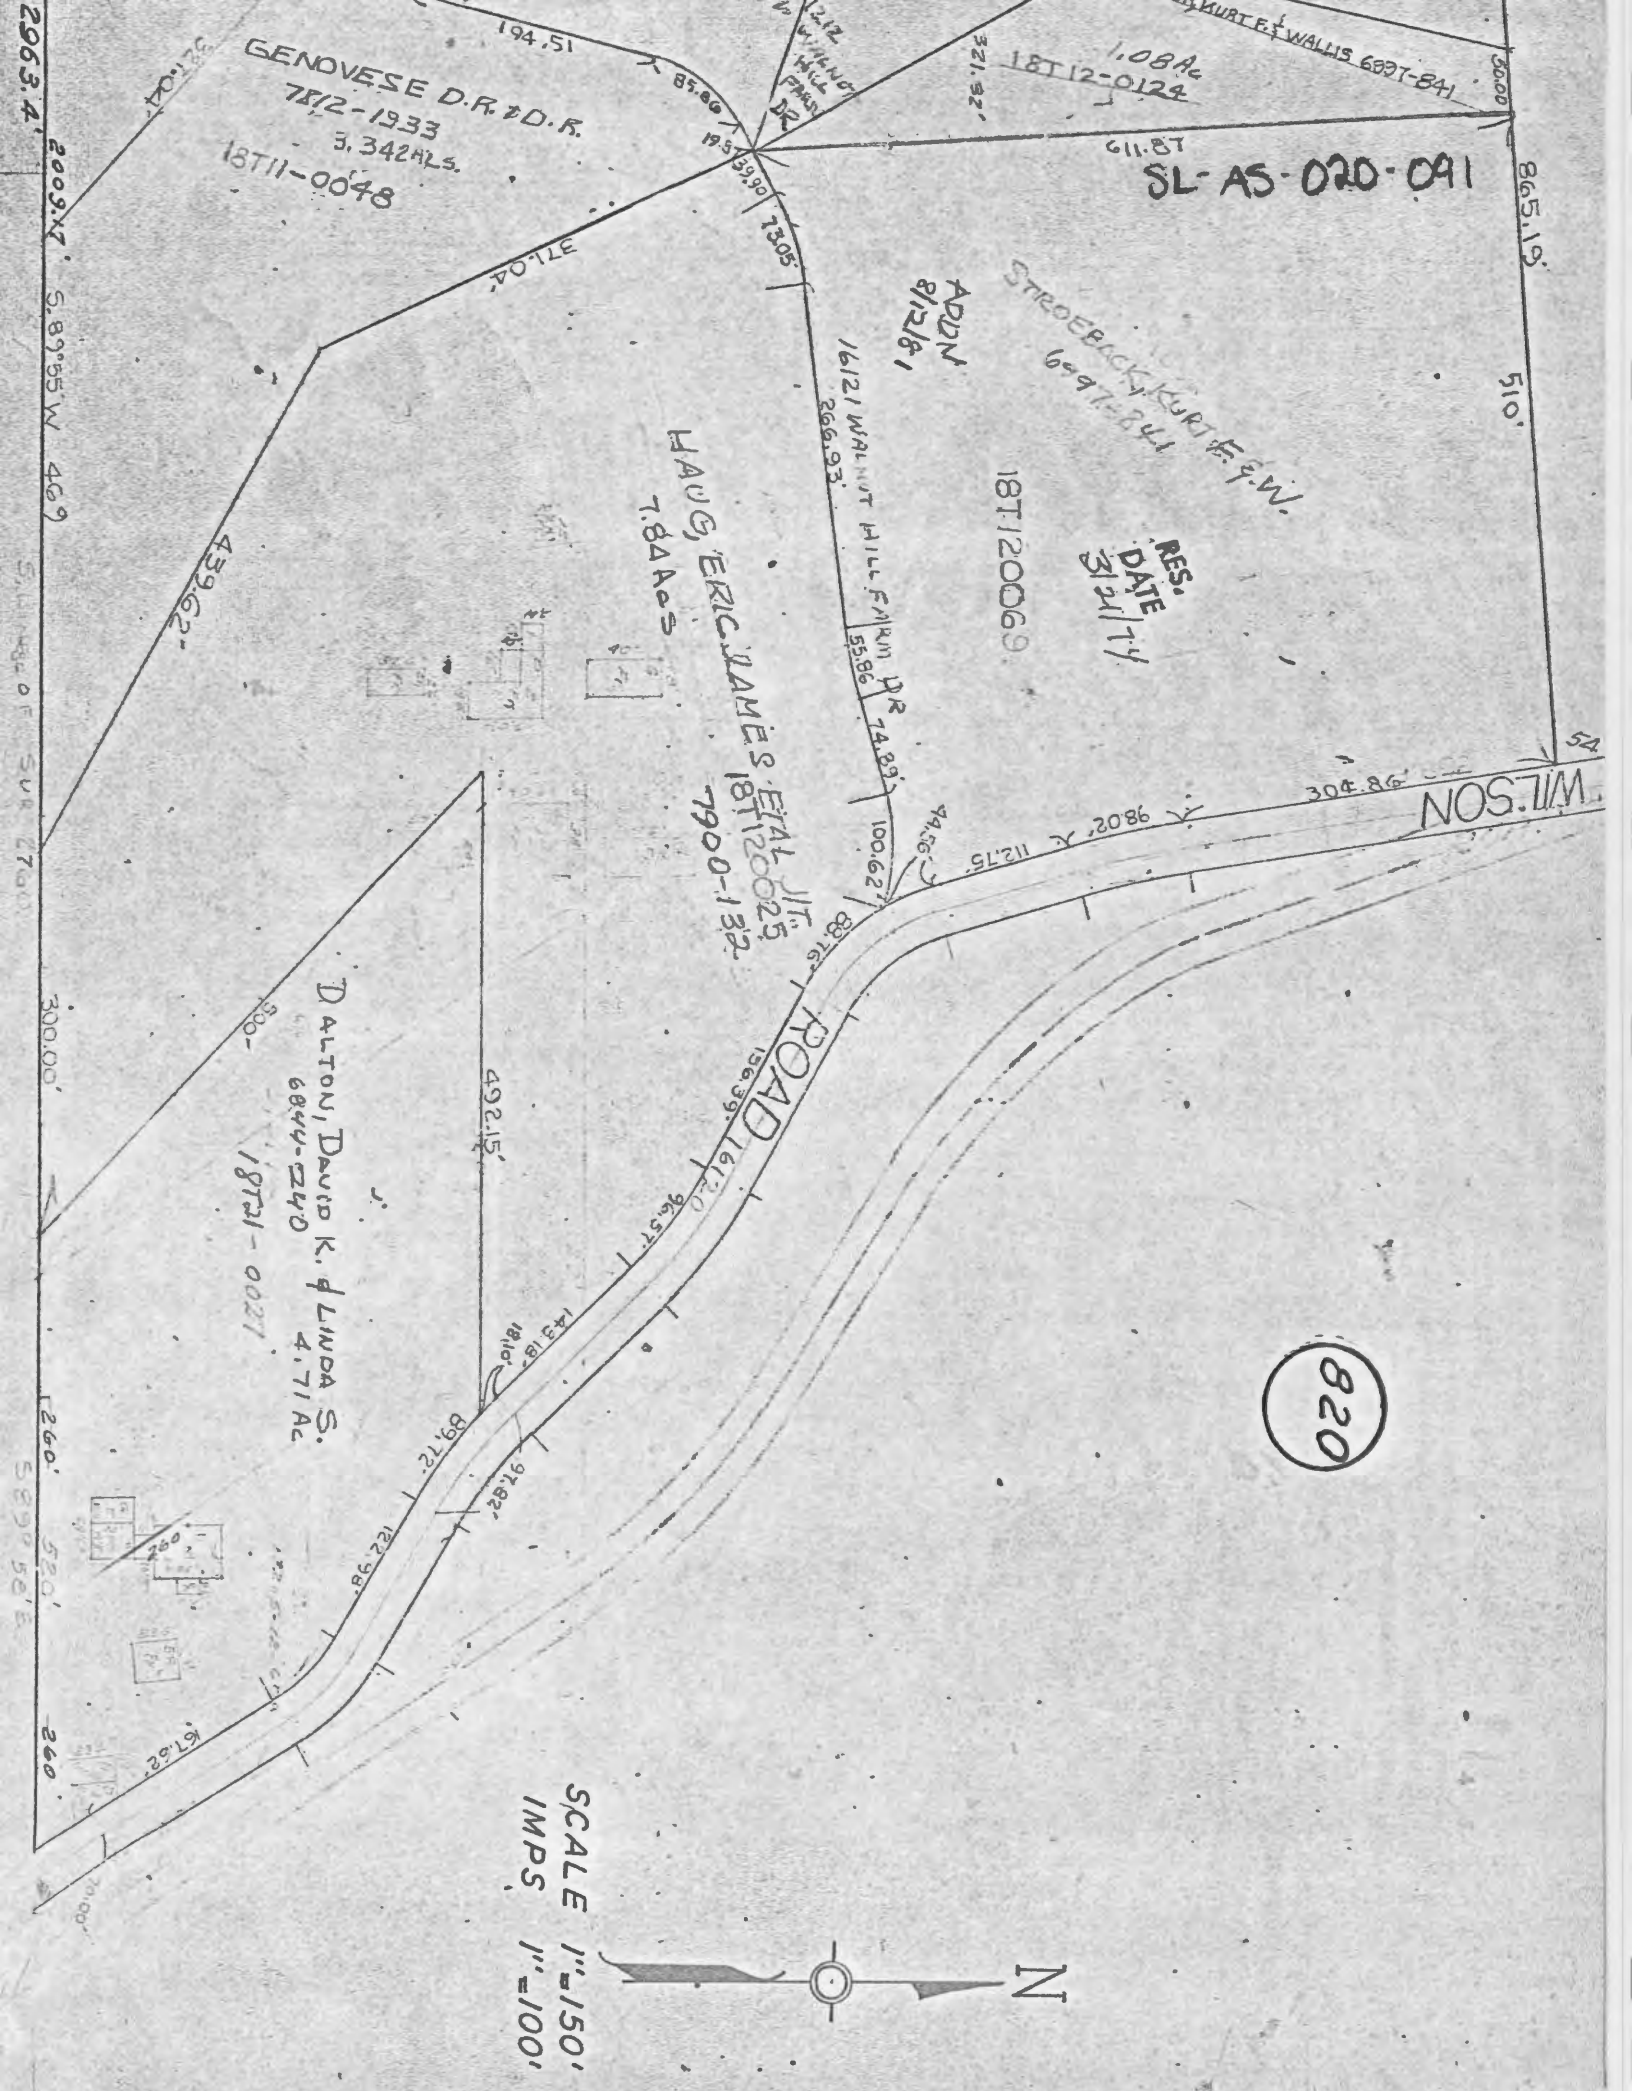



HISTORIC INVENTORY

SL-AS-020-0A2

1 No 18W530025		4 Present Name(s) Puellman-Wardenburg Farm		1 No	
2 County St. Louis		5 Other Name(s)		2 County St. Louis	
3 Location of Negatives 34329-34		18313 Wardenburg Road		4 Present Name(s) Puellman-Wardenburg Farm	
6 Specific Location 3 acres, Lot 1, Wardenburg Flats Plat 1		16. Thematic Category		28. No. of Stories 2 - 1	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1865 & c. 1900		29. Basement? Yes ☐ No ☒ not evident	
8 Site Plan with North Arrow		18. Style or Design vernacular 49		30. Foundation Material stone, concrete 40	
		19. Architect or Engineer		31. Wall Construction frame wu	
		20. Contractor or Builder		32. Roof Type & Material GB 99 gable, tar paper	
		21. Original Use, if apparent farm OIA		33. No. of Bays Front 3 Side 1+	
		22 Present Use farm		34. Wall Treatment asbestos siding 64	
		23 Ownership Public ☐ Private ☒		35. Plan Shape irregular	
		24. Owner's Name & Address, if known W. Jon & Darcy J. Mathis 5 Monarch Hill Court Chesterfield, MO 63105		36. Changes Addition ☒ (Explain in #42) Altered ☒ Moved ☐	
9 Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior fair	
0 Site ☐ Building ☒ Structure ☐ Object ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☒	
1 On National Register? Yes ☐ No ☒		27. Other Surveys in Which Included		39. Endangered? By What? Yes ☐ No ☒	
2 Part of Estab Hist Dist? Yes ☐ No ☒				40. Visible from Public Road? Yes ☐ No ☒	
3 Name of Established District				41. Distance from and Frontage on Road 268	
12 Further Description of Important Features This narrow two-story house has two-over-two windows with shutters. The shed-roof side porch was apparently glazed and then extended across two bays of the front, blocking the original front door. Those windows are one-over-one.				5 Other Name(s) 18313 Wardenburg Road	
13 History and Significance The 1862 atlas shows most of Survey 133, about 200 acres, owned by Amazon Howell. In 1865 60 acres were sold by Fred G. Schulze to Louis Puellman, member of a pioneer local family. Puellman was probably responsible for starting the farm in its present form, but eventually it was sold at auction to Charles W. Wardenburg. He paid \$4,250 for the 60 acres in 1898. Wardenburg owned 53 acres in Survey 164 and another 53 acres in Survey 479. He must have substantially improved this farm, because when he died				Photo	
14 Description of Environment and Outbuildings The house is part of a complex of buildings which includes a large white-painted barn and a small frame residential structure which is one bay by one bay with clapboard siding, a metal roof, and six-over-six windows. The property stands far to the east of Eatherton Road North and is a-proached by a straight gravel road (contd)					
15 Sources of Information St. Louis County Recorder of Deeds, Book 102, p. 505. St. Louis City Recorder of Deeds, Book 292, p. 424.		46. Prepared by Esley Hamilton			
		47. Organization St. Louis County Parks			
		48. Date 9/89		49 Revision Date(s)	

Puellman-Wardenburg Farm
18313 Wardenburg Road

42. continued

in 1917 it was valued at \$7,500.

43. continued

which has recently been designated Wardenburg Road.

SL-AS-020-092

WARDENBURG, WALTER C. & CLARA A.
43.03 ACRES 7344-2036
~~18W44-0045~~
18W44-0056

50' ROAD

211.67'

W. LN. SURV. 133
E. LN. SURV. 362

745

420'
Wardenburg, W.C. & C.A.
2126-36 2.00 ACS ±
18W43-0057
420'



560.17'

1216.34'

KROENUNG ESTATE

FOR REMAINDER
SEE PEG 753

SCALE 1" = 150'

PART OF SURVEYS 133 & 362

SL-AS-020-092



WARDENBURG ROAD



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-093

1 No 17R140060	4 Present Name(s) Byrd-Hoefer Farm		1 No.
2 County St. Louis	5 Other Name(s)		
3 Location of Negatives 34082-28	551 White Road		

6 Specific Location 1.85 acres in Survey 415, T45 R4, part of Lot 4, Philip Morris Estate	16 Thematic Category	28 No. of Stories 1½	2 County St. Louis
7 City or Town If Rural, Township & Vicinity Chesterfield	17 Date(s) or Period constructed c. 1850 & c. 1884	29 Basement? Yes ☒ No ☐	
8 Site Plan with North Arrow	18 Style or Design vernacular	30 Foundation Material stone 40	
	19 Architect or Engineer	31 Wall Construction frame, log ? wu	
	20 Contractor or Builder	32 Roof Type & Material 16 cross gable, comp. 63	
	21 Original Use, if apparent residence DIA	33 No. of Bays DR Front irr. Side 3	
	22 Present Use residence	34 Wall Treatment asbestos siding 64	
	23 Ownership Public ☐ Private ☒	35 Plan Shape irregular	
	24 Owner's Name & Address, if known Elinor & Horton E. Abmeyer	36 Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐	
	25 Open to Public? Yes ☐ No ☒	37 Condition Interior _____ Exterior good	

9 Coordinates UTM Lat _____ Long _____	10 Site Building ☒ Structure Object ☐	38 Preservation Underway? Yes ☐ No ☒	4 Present Name(s) Byrd-Hoefer Farm
11 On National Register? Yes ☐ No ☒	12 Is Eligible? Yes ☐ No ☐	39 Endangered? By What? Yes ☐ No ☒	
13 Part of Estab Hist Dist? Yes ☐ No ☒	14 District Potent'l? Yes ☐ No ☒	40 Visible from Public Road? Yes ☒ No ☐	
15 Name of Established District		41 Distance from and Frontage on Road 580'	

12 Further Description of Important Features This house is basically T-shaped but has additions on the north side and east front. The front also has a long shed-roof dormer with three four-pane windows. Below that is an enclosed shed-roof porch. The north addition extends the rear wing. The rear wing also has an enclosed porch along its south face, and this is now the primary entry to the house.	Photo	5 Other Name(s) 551 White Road
13 History and Significance The main part of this property is a one-acre tract acquired by William F. and Narcissa Byrd in 1849 from the estate of Philip and Biddy Morris. A deed in 1900 says that the Byrds lived here. William F. Byrd died in 1861, and Narcissa married William J. Hibler. She died in November 2, 1883 and he November 17. The property remained the possession of William F. Byrd's three sons until 1900, when they sold it to Gottfried Stein. At that time James R. Byrd lived in the town of Volcano, Amador County, California (cont'd)		

14 Description of Environment and Outbuildings The house and farm complex stand far back from the road in a grove of old trees. At the south end of the complex is a white-painted barn with vertical siding. Several smaller farmbuildings lie between and west of the house and barn. (2)	46 Prepared by Fsley Hamilton
15 Sources of Information St. Louis City Recorder of Deeds, Book B5, p. 357. St. Louis County Recorder of Deeds, Book 118, p. 272; 119, 130; 130, 457; 396, 512 (two documents); 526, 525; 527, 491. St. Louis City Probate Court, Refusal 40, estates 324, 5357.	47 Organization St. Louis County Parks
	48 Date 8/89


Byrd-Hoefer Farm
551 White Road

43. continued

while John F. and William Rufus still lived in St. Louis County. Gottfried Stein died in 1901 with so many debts that the property had to be sold the next year, but his widow Catherine was able to buy it for \$130. She kept it until 1916, when she sold it to George R. Hoefer. Hoefer died in 1920, when this acre was valued at \$1,600. He also owned a farm of 140 acres nearby in partnership with his brother Christ. His widow Elsie, acting as guardian for her three minor children, sold the acre in 1922 to Albert and Alice Sellenriek. The farmstead here must date in its origins to the 1850's. The house may have been rebuilt by the Byrd sons after their mother's death in 1883, and it may also have been improved in the early 1900's by Catherine Stein or George Hoefer.

SL-AS-020-093

FAUST, MARY PLANT
22.13 ACS.
2597-29
7695-2458

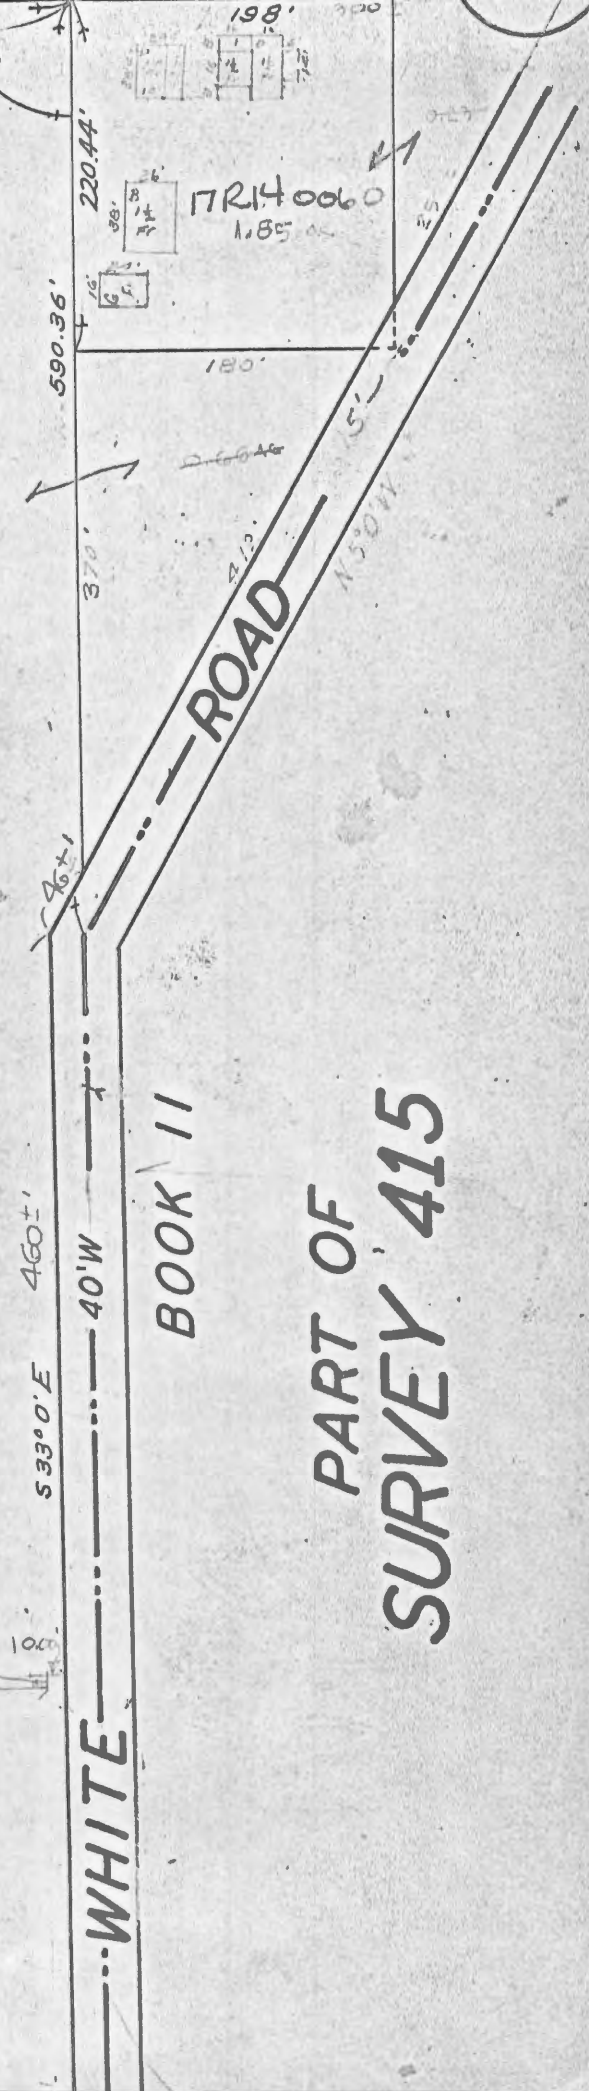

7558-1140
9.87 ACS.

DR. 2597:29

ARCHDIOCESE OF ST. LOUIS ADMINISTRATOR

7581-1365



SL-AS-020-094

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101

HISTORIC INVENTORY

1 No 18R530033 2 County St. Louis 3 Location of Negatives 34082-24 6 Specific Location part of Lot 2, Biddy Morris estate partition, in Survey 1911, T45 R4 7 City or Town If Rural, Township & Vicinity Chesterfield 8 Site Plan with North Arrow 9 Coordinates UTM Lat Long 10 Site: I Building ☒ Structure: I Object ☐ <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> 11. On National Register? Yes ☐ No ☒ 13 Part of Estab Hist Dist.? Yes ☐ No ☒ </td> <td style="width: 50%;"> 12. Is It Eligible? Yes ☐ No ☐ 14. District Potent'l? Yes ☐ No ☒ </td> </tr> </table> 15 Name of Established District	11. On National Register? Yes ☐ No ☒ 13 Part of Estab Hist Dist.? Yes ☐ No ☒	12. Is It Eligible? Yes ☐ No ☐ 14. District Potent'l? Yes ☐ No ☒	4 Present Name(s) Edward Sellenriek House 5 Other Name(s) 790 White Road 16. Thematic Category 17 Date(s) or Period constructed c. 1925 18. Style or Design Federal Revival 09 19. Architect or Engineer 20. Contractor or Builder 21. Original Use, if apparent residence DIA 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24. Owner's Name & Address, if known Leah C. Wheeler 25. Open to Public? Yes ☐ No ☒ 26. Local Contact Person or Organization 27. Other Surveys in Which Included	28. No. of Stories 2-2-1 29. Basement? Yes ☒ No ☐ 30. Foundation Material concrete 65 31. Wall Construction frame WLL 32. Roof Type & Material gable, comp. GB GB SD 63 33. No. of Bays Front 5+ Side 3 34. Wall Treatment aluminum siding 54 35. Plan Shape irregular 36. Changes (Explain in #42) ST Addition: ☒ Altered: ☐ Moved: ☐ 37. Condition Interior Exterior good 38. Preservation Underway? Yes ☐ No ☒ 39. Endangered? By What? Yes ☐ No ☒ 40. Visible from Public Road? Yes ☒ No ☐ 41. Distance from and Frontage on Road /500
11. On National Register? Yes ☐ No ☒ 13 Part of Estab Hist Dist.? Yes ☐ No ☒	12. Is It Eligible? Yes ☐ No ☐ 14. District Potent'l? Yes ☐ No ☒			
42. Further Description of Important Features Windows are one-over-one and have aluminum storm windows and non-working shutters. The front entry has a low gabled hood and latticework panels framing the door and narrow sidelights. On the walls to either side are carriage lamps. The roof of the rear wing is at right angles to the front. There is also a shed-roofed addition of one bay on the north side. Another lower wing is on the south side of the house. It has a large outside brick chimney. A second, smaller, chimney rises from the north end of the (contd) 43 History and Significance This house stands on part of the homestead farm of 158 acres acquired about 1870 by Wilhelm Ludwig Sellenriek. He died in 1913. Sellenriek and his wife Hannah had twelve children, and he suggested in his will that the "farm be divided into two farms of convenient and suitable sizes," and sold to the children willing to pay the best price. Sellenriek's own house was south of here and farther from the road, in Survey 370, according to the 1878 atlas. As things worked out the farm went to William F. Sellenriek, the 44 Description of Environment and Outbuildings				
45 Sources of Information St. Louis City Recorder of Deeds, Book 364, page 507 St. Louis County Recorder of Deeds, Book 356, page 216; 612, 549; 627, 492; 644, 517 and 518 St. Louis County Probate Court, #3886		46. Prepared by E. Hamilton 47. Organization St. Louis County Parks 48. Date 8/89 49 Revision Date(s)		

1 No
2. County
St. Louis
4 Present Name(s)
Edward Sellenriek House
5 Other Name(s)
790 White Road

Edward Sellenriek House
790 White Road

42. continued

main block. A low terrace runs the length of the front of the house.

43. continued

eldest child, and to Edward Sellenriek, the fifth. This took place in 1924. Immediately, however, William sold his part to Edward, who thus reassembled the whole farm. Although this house has been remodeled, its size and shape suggest that it was built by Edward at this time or earlier. He died in 1968.

SL-AS-020-094

18R53-0033
WHEELER, LEE F. & L.C.
6916-286

6370-22.50-1/3/69
LEVINSON, MICHAEL M. et al.
645'±

LOT 2

WINDEMERE PLACE PLAT 3

SEE PGS. 923A,B,C,D & E

Levinson, Michael M. f
6330-1470-1665
~~54.53~~ Ac
52.53

ЭПШТЕ



HISTORIC INVENTORY

3L-AS-020-095

1 No.		4 Present Name(s) Louisa Sander House	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives St. Louis County Parks		17107 Wild Horse Creek Road	
6 Specific Location 9 acres in Survey 125, Township 45, Range 4		16 Thematic Category	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed late 1890's	
8 Site Plan with North Arrow		18 Style or Design Vernacular Victorian 49	
		19 Architect or Engineer	
		20 Contractor or Builder	
		21 Original Use, if apparent residence DIA	
		22 Present Use residence	
		23 Ownership Public ☐ Private ☒	
		24 Owner's Name & Address, if known Carl W. & Brenda L. Glaser	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒	
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		26 Local Contact Person or Organization	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included	
12 Is It Eligible? Yes ☐ No ☐			
13 Part of Estab Hist Dist? Yes ☐ No ☒		14 District Potent? Yes ☐ No ☒	
15 Name of Established District		28 No. of Stories 2 -1-1	
		29 Basement? Yes ☒ No ☐	
		30 Foundation Material stone 46	
		31 Wall Construction frame 40	
		32 Roof Type & Material 6B cross gable, comp. 63	
		33 No. of Bays Front 3 Side irr.	
		34 Wall Treatment aluminum siding 54	
		35 Plan Shape irregular	
		36 Changes (Explain in #42) Addition ☒ Altered ☒ Moved ☐	
		37 Condition Interior Exterior good	
		38 Preservation Underway? Yes ☐ No ☒	
		39 Endangered? By What? Yes ☐ No ☒	
		40 Visible from Public Road? Yes ☒ No ☐	
		41 Distance from and Frontage on Road /210	
42 Further Description of Important Features The center front bay projects forward under the front gable. The corners under the gable are angled but lack windows. Modern 6-over-6 windows have non-working shutters. The front door has modern frame with sidelights and broken pediment. The entry is flanked by carriage lights. Additions at the rear include a two-car garage.		Photo	
43 History and Significance The original tract of 79 acres here was sold by Robert Lewis in 1857 to Johannes Donges. He sold half the property to his son Ludwig Donges in 1885 and died the following year. In 1887 Ludwig sold a right-of-way across his part to the St. Louis, Kansas City, and Colorado Railroad. The next year Ludwig, his brother Martin, and his sisters Louise Albrecht and Lizzie Kreinemann sold their father's remaining acreage to Louis			
44 Description of Environment and Outbuildings The house is approached by a very long axial drive that turns in front of the house to the garage on the west side.			
45 Sources of Information St. Louis County Recorder of Deeds Bk. 22, 146; 35, 481; 40, 236 & 326; 48, 111; 83, 246; 4971, 390; 5005, 272. St. Louis City Recorder of Deeds Bk. 204, p. 135. St. Louis County Probate Court, cases 428 and 3174.		46 Prepared by E. Hamilton	
		47 Organization St. Louis County Parks	
		48 Date 8/88	
		49 Revision Date(s)	

1 to 19

2 County
St. Louis4 Present Name(s)
Louisa Sander House5 Other Name(s)
17107 Wild Horse Creek Road

Louisa Sander House
17107 Wild Horse Creek Road

43. continued

Schmidt, and a few months later Schmidt was also able to acquire Ludwig Donges's tract through a foreclosure. Schmidt kept the property only two years before selling it to Frederick Neumann in 1890, and Neumann's tenure was limited by his divorce in 1895 from his wife Sophia, which forced the sale of the land. The purchaser was Louisa Sander.

In the course of these transactions, the value of the property had risen from about \$18 per acre in 1857 (when Lewis had specified that the property included "appurtenances") to \$65 per acre in 1895. This is still low compared to improved farmland in Meramec Township, which was going for over \$100 per acre.

Louisa Sander was the widow of Frank Sander, who had died in 1885. She lived until 1910, bequeathing this property and another 78 acres nearby to her daughters, Emma and Mary, with the life tenancy in another house to her brother William Panhorst. Emma had married Frank Glaser or Glasser, and Mary had married August Glaser.

D. 57.

18U52-0039

201-11-102

70145-5-73 W. B. Arnold, JR.
200 1.7.63

RUBBERYSTONE
C. H. W.
18052-0017
7311-1862

18051-0025

Box 6961-169

27.004.

N.O. 34'E.

2310°E.

PT. OF

608

SURVEY

126

WILD HORSE

60'W

17119

CREEK ROAD

181.53

13

30W

HORSE

ROAD

CONFIDENTIAL

S. 89°55'E.

PT. OF SUR.

810

125

PART OF

812

SURVEY 886

PART OF

SURVEY 125





Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65102

HISTORIC INVENTORY

SL-AS-020-096

1. Title		4. Present Name(s)		1. County St. Louis	2. Present Name(s) Stevens-Coleman House
2. County St. Louis		5. Other Name(s)			
3. Location of Negatives St. Louis County Parks		17917 Wild Horse Creek Road			
6. Specific Location 3.97 acres, Lot 5, Germuth Acres		16. Thematic Category		28. No. of Stories 2	
7. City or Town If Rural, Township & Vicinity Chesterfield		17. Date(s) or Period constructed 1840's and 1870's		29. Basement? Yes ☒ No ☐	
8. Site Plan with North Arrow		18. Style or Design Queen Anne 45 49		30. Foundation Material stone 40	
		19. Architect or Engineer		31. Wall Construction frame well	
		20. Contractor or Builder		32. Roof Type & Material IG SD cross gable, comp	
		21. Original Use, if apparent residence DIA		33. No. of Bays Front irr. 3 Side 3	
		22. Present Use residence		34. Wall Treatment clapboard 21	
		23. Ownership Public ☐ Private ☒		35. Plan Shape irregular	
		24. Owner's Name & Address, if known John A. & Patricia Schlautman		36. Changes (Explain in #42) ☒ Addition ☒ Altered ☒ Moved ☐ pach OH	
9. Coordinates UTM Lat Long		25. Open to Public? Yes ☐ No ☒		37. Condition Interior Exterior good	
10. Site: Building ☒ Structure: Object ☐		26. Local Contact Person or Organization		38. Preservation Underway? Yes ☐ No ☒	
11. On National Register? Yes ☐ No ☒		12. Is Eligible? Yes ☐ No ☐		39. Endangered? By What? Yes ☐ No ☒	
13. Part of Estab. Hist. Dist.? Yes ☐ No ☒		14. District Potent? Yes ☐ No ☒		40. Visible from Public Road? Yes ☒ No ☐	
15. Name of Established District		27. Other Surveys in Which Included		41. Distance from and Frontage on Road /474.13	
42. Further Description of Important Features The main house is T-shaped with front-facing gable to the west of the entry wing. The gable has a bulls-eye window and returns. A modern 3-part oriel is on the 1st-floor beneath it. The entry wing has a 1st-floor shed-roofed porch with a gable over the front steps. The gable end has shaped shingles. The porch posts have elaborately cut brackets. Balusters are turned. A broad brick chimney rises at the end of this wing. Windows are 1-over-1 with workable shutters and lintel entablatures. The west					
43. History and Significance This house sits on a tract of 255.84 acres acquired by Lewis and Nancy Stevens in the 1830's. They sold the tract in 1841 to their son George T. Stevens for \$1,500. He died in 1847 (six years before his father), leaving a widow Judith T. and three children, Robert, Ophelia, and Georgiana. His estate showed that he owned twelve slaves which he used to raise a cash crop of hemp, almost 6,000 pounds of which were on hand. About 1870 part of the property was sold by the Stevens estate to Robert G. Coleman.					
44. Description of Environment and Outbuildings The house stands at the top of a hill above the road, looking north to the Missouri River. Large old trees dot the grounds. A few old storage buildings survive from the property's days as a farm.					
45. Sources of Information Scharf, <u>History of St. Louis</u> (1883), pp. 1928, 1932. Thomas, <u>History of St. Louis County</u> (1911), pp. 277-278. St. Louis County Probate Court, cases 1200 and 2242. continued.				46. Prepared by E. Hamilton	
				47. Organization St. Louis County Parks	
				48. Date 8/83	
				49. Revision Date(s)	

1. County
St. Louis

2. Present Name(s)
Stevens-Coleman House

3. Other Name(s)
17917 Wild Horse Creek Road

Stevens-Coleman House
17917 Wild Horse Creek Road

42. continued

face of roof has a large shed-roof dormer with wide sidings. Below the west wing is a wide shed-roofed one-story addition, with a large multipane window toward the street and smaller bowed windows on the west side flanking a center entrance.


43. continued

Born in 1840, he was the son of John M. Coleman and the grandson of Robert G. Coleman, who came to St. Louis County from Spottsylvania County, Virginia, in 1836 or 1837 and acquired a large tract of land in the Bonhomme Bottom of the Missouri River (the Gumbo area). The grandfather died 1840 and the father in 1849, still a young man. This Robert G. Coleman fought in the Civil War on the Confederate side, then graduated from Cincinnati College in Ohio in 1867 and returned to the Orrville area to set up practice as a physician. His first wife was Mary Harris Coleman, called Mollie, the daughter of his uncle, another Robert G. Coleman, who also lived in this area and who represented it twice in the state senate, being elected in 1857 and 1877. Senator Coleman died in 1895. Doctor Coleman and Mollie had eight children, one of whom died in infancy. Of the surviving children, five boys and two girls, one became a farmer in Cass County, one in Burton County and one in Mississippi; Robert E. became a merchant in St. Louis, and Henry T. became a physician in Pattonville. Mollie Coleman died in 1888, and in 1891 Dr. Coleman married another cousin, Lilly Coleman, by whom he had one more son. Dr. Coleman died in 1904.

45. continued

St. Louis City Recorder of Deeds, Book T², p. 160.
St. Louis City Probate Court, case 2292, 2876.

SL AS 020-096

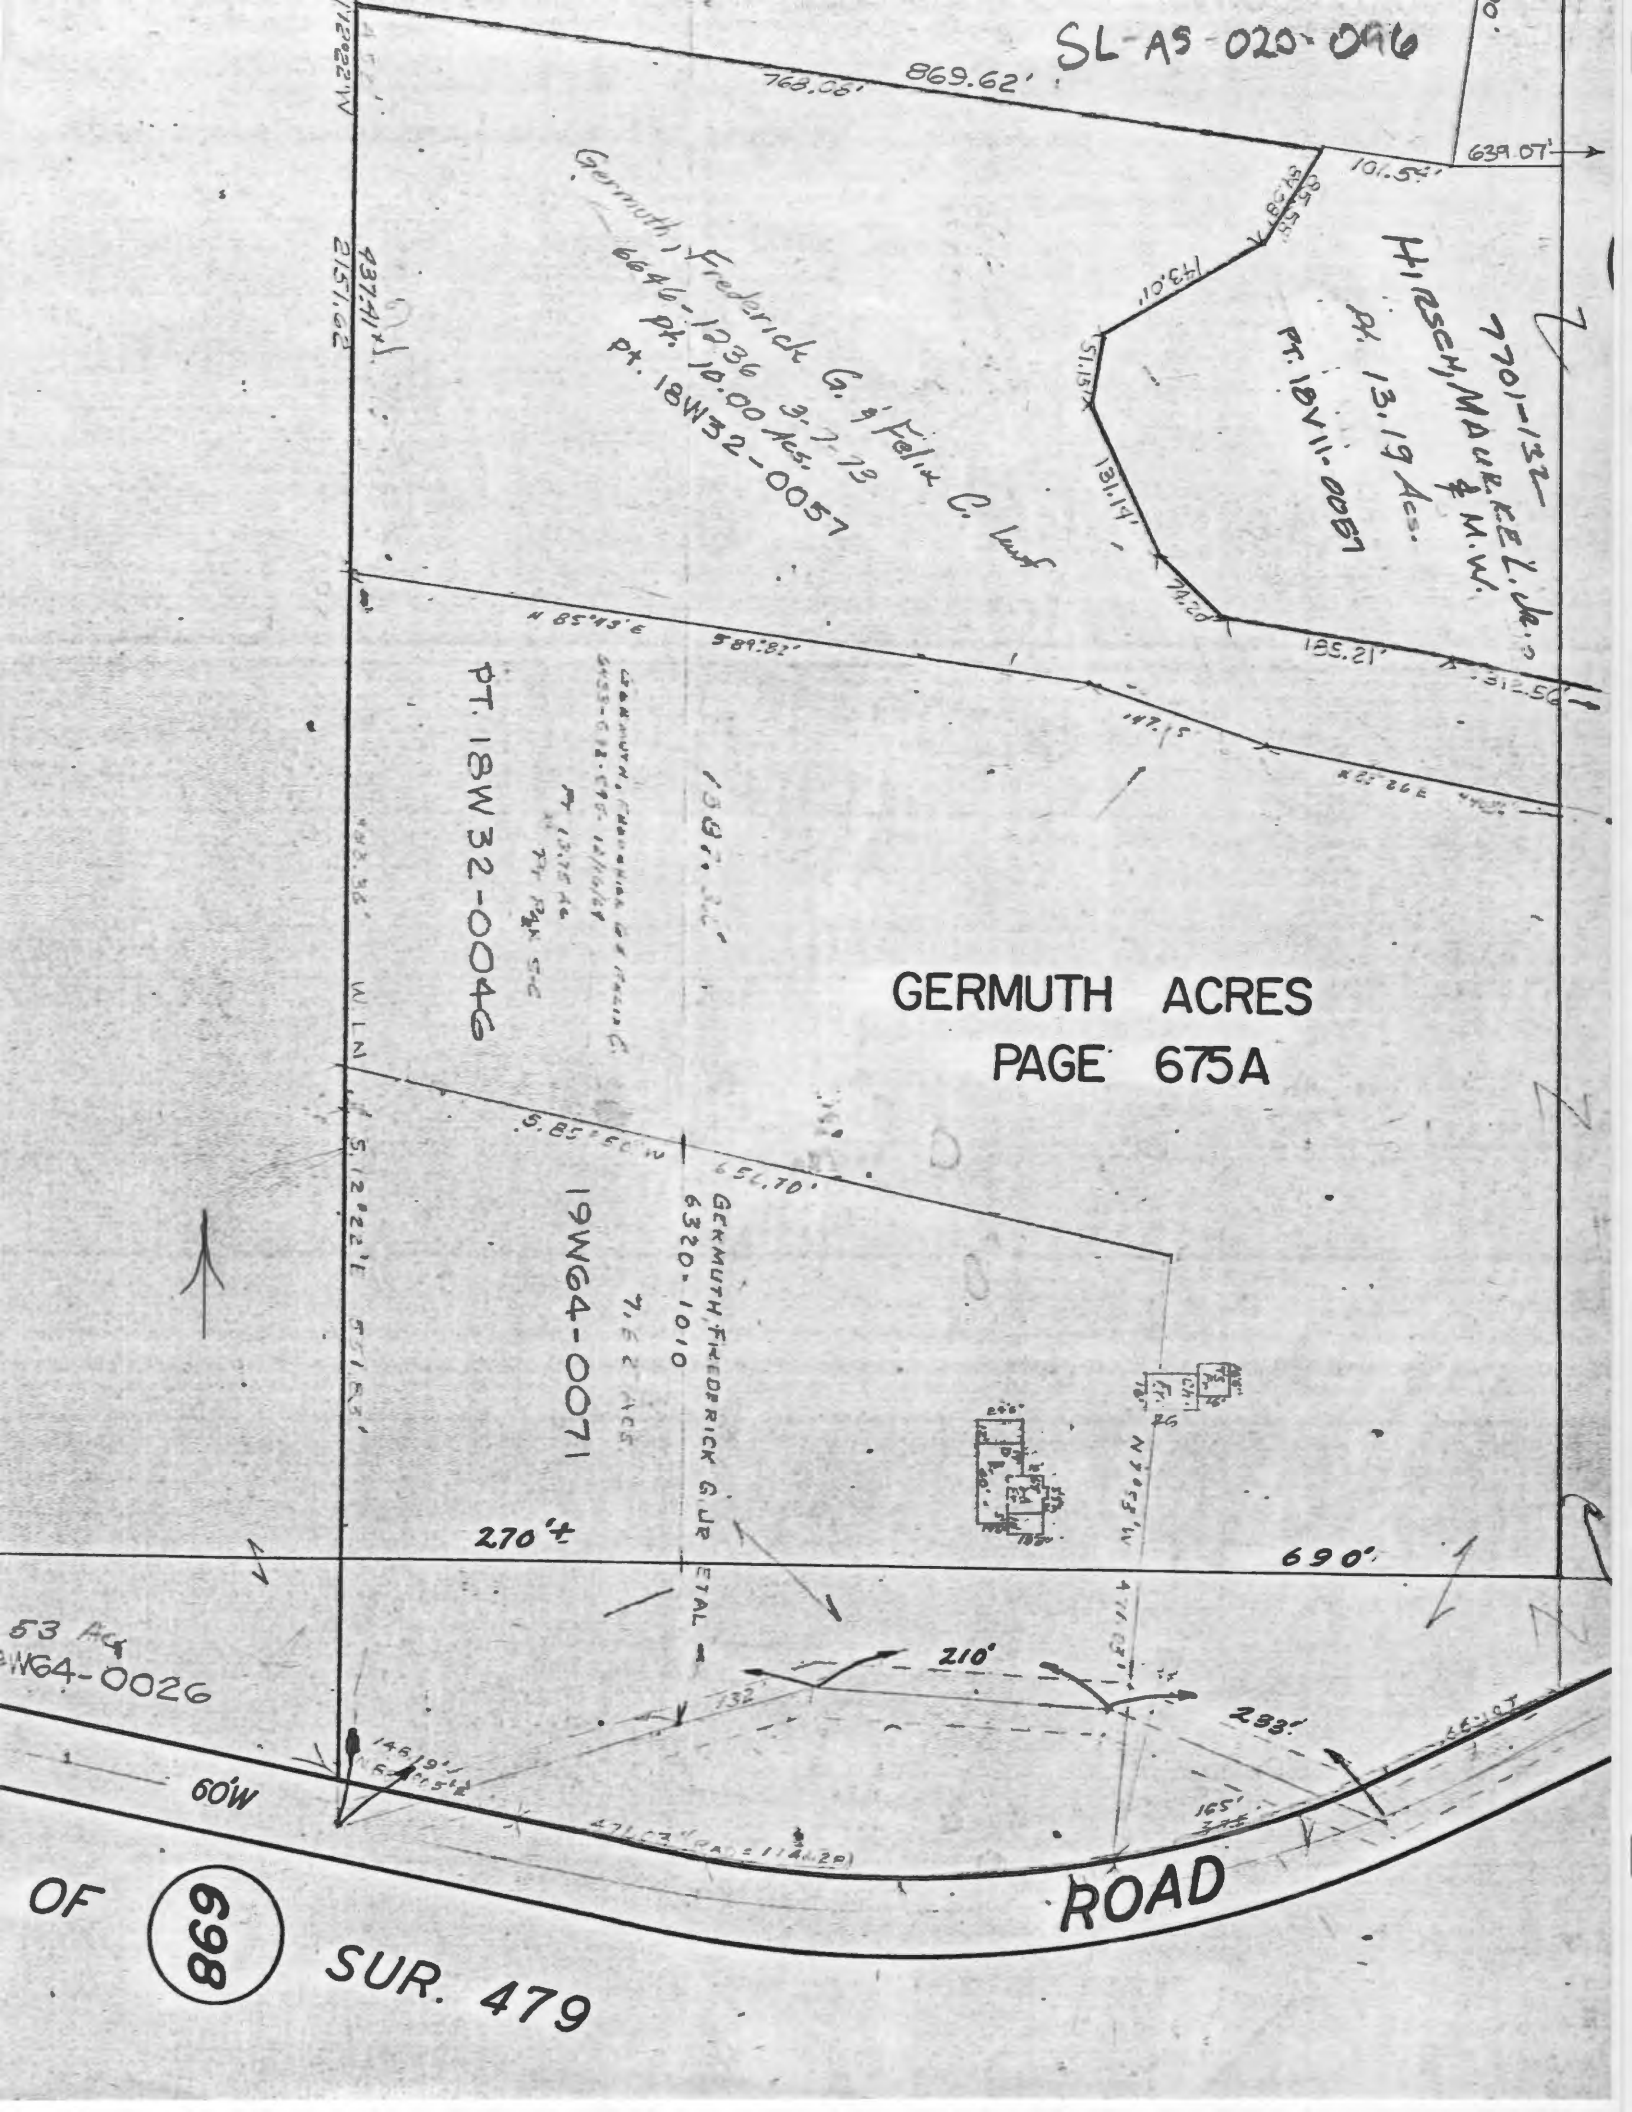

GERMUTH ACRES
PAGE 675A



HISTORIC INVENTORY

SL-AS-020-097

1 No.		4 Present Name(s) Orr-Broemmelsick House	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives St. Louis County Parks		18060 Wild Horse Creek Road	
6 Specific Location 1 acre in Survey 164, Township 45, Range 3		16 Thematic Category	
7 City or Town If Rural, Township & Vicinity Chesterfield		17 Date(s) or Period constructed c. 1875	
8 Site Plan with North Arrow		18 Style or Design Queen Anne 49	
		19 Architect or Engineer	
		20 Contractor or Builder	
		21 Original Use, if apparent residence 014	
		22 Present Use residence	
		23 Ownership Public ☐ Private ☒	
		24 Owner's Name & Address, if known Alan S. & Laura L. Manchester	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒	
10 Site ☐ Building ☒ Structure ☐ Object ☐		26 Local Contact Person or Organization	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included	
12 Is It Eligible? Yes ☐ No ☐			
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒			
14 District Potent'l? Yes ☐ No ☒			
15 Name of Established District			
42 Further Description of Important Features The slightly-less-than-two-story part of the house is T-shaped, with the foot of the T facing the street. The east angle has been filled in with a windowless one-story shed-roof addition, and the gabled rear wing is only one story as well. It has a verandah along the east side. The front gables have shaped bargeboards and sunbursts in the apexes.		28 No. of Stories 2-1-1	
		29 Basement? Yes ☒ No ☐	
		30 Foundation Material stone 40	
		31 Wall Construction frame WU	
		32 Roof Type & Material IG GB	
		33 No. of Bays Front irr. Side irr. 4	
		34 Wall Treatment clapboard 21	
		35 Plan Shape irregular	
		36 Changes (Explain in #42) ☒ Addition ☒ ☒ Altered ☒ Moved ☐	
		37 Condition Interior Exterior good	
		38 Preservation Underway? Yes ☐ No ☒	
		39 Endangered? By What? Yes ☐ No ☒	
		40 Visible from Public Road? Yes ☒ No ☐	
		41 Distance from and Frontage on Road /159'	
43 History and Significance This house stands on a larger tract set off by the county court in 1855 as the result of a suit between Elizabeth C. Ferguson and Hannah W. Howell. The larger tract of 30.44 acres was acquired by John Orr in 1855. He died in 1869. His widow Margaret was the daughter of Parks Bacon; her mother had subsequently married Frederick N. Ferguson and had been one of the principals in the 1855 lawsuit. Margaret sold 43.85 acres (40 south of Wild Horse Creek Road, 3.85 north) in 1873 to her son William T. Orr. He paid \$1,500.		Photo	
44 Description of Environment and Outbuildings The house is on the south side of Wild Horse Creek Road.			
45 Sources of Information St. Louis City Recorder of Deeds, Book 494, p. 322; 175, 288. St. Louis County Recorder of Deeds, Book 72, p. 119; 184, 431; 225,457 & 458. St. Louis County Probate Court, cases 2519, 7381		46 Prepared by E. Hamilton	
		47 Organization St. Louis County Parks	
		48 Date 8/88	
		49 Revision Date(s)	

St. Louis

Orr-Broemmelsick House

18060 Wild Horse Creek Road

Orr-Broemmelsick House
18060 Wild Horse Creek Road

43. continued

a little under \$30 an acre. He probably built this house shortly afterward. It was sold with 30.44 acres in 1894 to William Broemmelsick, who was apparently one of the seven children of August Frederick Broemmelsick. He seems to have traded this property back and forth several times with his brother J. Fred Broemmelsick, but at J. Fred's death in 1926 it appeared in his inventory.

45. continued

St. Louis City Probate Court, case 9040.

SL-AS-020-097

WILD HORSE CREEK

OLD WILD HORSE CREEK ROAD

252.12'

61.38'

18060

158.99'

402

ROGLEY, GLENN E. SR. & C.T. HW

19WG3-0038

7908-1138

RES.

DATE

10-20-77

ALTER 1976

100 ACS.

MANCHESTER, ALAN S. & LAURIE K.

8213-0336

19WG3-0049

N 24° 2' 11" E 272.51'

276.54'

159.06'

360.81'

Rich Sidney E & Audrey HW
6223-1180
4181
3/18/69

27.85 ACRES
11/18/68
19WG3-0072



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65102
HISTORIC INVENTORY SL-A5-020-098

1 No.		4 Present Name(s) James J. Collins House	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives St. Louis County Parks		18061 Wild Horse Creek Road	
6 Specific Location 7.94 acres on north sided of Wild Horse Creek Road in Survey 164, Township 45, Range 3		16 Thematic Category	
		17 Date(s) or Period constructed c. 1885	
7 City or Town II Rural, Township & Vicinity Chesterfield		18 Style or Design Queen Anne 45 21	
8 Site Plan with North Arrow		19 Architect or Engineer	
		20 Contractor or Builder	
		21 Original Use, if apparent residence 01A	
		22 Present Use residence	
		23 Ownership Public ☐ Private ☒	
		24 Owner's Name & Address, if known Alan D. & Margaret F. Montgomery	
9 Coordinates UTM Lat Long		25 Open to Public? Yes ☐ No ☒	
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		26 Local Contact Person or Organization	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included	
12 Is It Eligible? Yes ☐ No ☐			
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒		14 District Potenti'l? Yes ☐ No ☒	
15 Name of Established District			
42 Further Description of Important Features This very picturesque massing includes a front gable with 1st-floor shed-roofed bay window below it; angle tower with steep pyramidal roof; wraparound front porch, paired windows under a side gable, and lower rear wing with shed-roof side porch. Siding has obliterated most details except shaped posts and elaborately shaped porch frieze.		28 No. of Stories 2 1/2 - 1	
		29 Basement? Yes ☒ No ☐	
		30 Foundation Material stone 40	
		31 Wall Construction frame 60	
		32 Roof Type & Material 10 GB cross gable, hip, comp	
		33 No. of Bays TW Front irr. 3 Side irr. 3	
		34 Wall Treatment asbestos siding 64	
		35 Plan Shape irregular	
		36 Changes (Explain in #42) porch Addition: WA OH Altered ☒ Moved ☐	
		37 Condition Interior Exterior	
		38 Preservation Underway? Yes ☐ No ☒	
		39 Endangered? By What? Yes ☐ No ☒	
		40 Visible from Public Road? Yes ☒ No ☐	
		41 Distance from and Frontage on Road /582.78	
		Photo	
43 History and Significance James Collins bought this tract of 8 acres in 1884 from Gustav Hoppenberg, a local landowner and storekeeper in nearby Orrville. According to the deed, Hoppenberg had moved back to Germany, where he lived in Osnabruck, a city in northern Westphalia associated with Hanover. He had acquired this property in the 1860's from John Orr. Ac- cording to the 1893 county directory, Collins was a carpenter. He lived here until his death in 1927, leaving his widow Johanna, 3 daughters and a son. That year the property was valued at \$2,500.			
44 Description of Environment and Outbuildings The yard is littered with old furniture, tools and building materials.			
45 Sources of Information St. Louis County Recorder of Deeds, Book 24, p. 588. St. Louis County Probate Court, case 7851.		46 Prepared by E. Hamilton	
		47 Organization St. Louis County Parks	
		48 Date 8/88 49 Revision Date(s)	

1 No
 2 County
 St. Louis
 3 Present Name(s)
 James J. Collins House
 4 Other Name(s)
 18061 Wild Horse Creek Road

SL-AS-020-098

18W31-0047.

FICK, EDWARD A.

~~1098.52~~ 1049.1 +

4

FICK, EDWARD & ELISE
16-8/38/48
6.14 AC.

18W22-0045.

FICK EDW.A

18W22-0012

121.

197.48'

318.48'

\$70.00

318.40'

160.89

1200.67

570.001

2.10"

1036301

8W31-0014

318.48'

RINKEL, NELSON J. JR. & C. HW

7932-932

8W31-0025

562.65, 53508

Montgomery, Alan D. & Margaret F. h.w.
6369-1764 12/26/68 7.94 ACS

19W63 - 0050

SUR. 164

Etherwein, Forest

N 13' W 753.06'

2007-05

1. 4. 4.

930.66

60°W

ROAD

252-17'

WILD HORSE CREEK

P.T. C

P.T. OF (697) SUR. 164



SL-AS-020-099

Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65102

HISTORIC INVENTORY

1 Name		4 Present Name(s) Eatherton Cottage	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives St. Louis County Parks		18332 Wild Horse Creek Road	
6 Specific Location about 2 acres in Survey 153, Township 45, Range 3, near the north line of the survey		16 Thematic Category	
		17 Date(s) or Period constructed 1850's	
7 City or Town If Rural, Township & Vicinity Chesterfield		18 Style or Design vernacular 08	
8 Site Plan with North Arrow		19 Architect or Engineer	
		20 Contractor or Builder	
		21 Original Use, if apparent residence 01A	
		22 Present Use residence	
9 Coordinates UTM Lat Long		23 Ownership Public ☐ Private ☒	
		24 Owner's Name & Address, if known Kate Sutton	
10 Site: ☒ Building ☒ Structure: ☐ Object: ☐		25 Open to Public? Yes ☐ No ☒	
11 On National Register? Yes ☐ No ☒		26 Local Contact Person or Organization	
12 Is II Eligible? Yes ☐ No ☐		27 Other Surveys in Which Included	
13 Part of Estab Hist Dist? Yes ☐ No ☒		14 District Potent'l? Yes ☐ No ☒	
15 Name of Established District		28 No. of Stories 1 1/2 - 1 - 1	
		29 Basement? Yes ☒ No ☐	
		30 Foundation Material stone	
		31 Wall Construction frame	
		32 Roof Type & Material GB gable, shed SDS	
		33 No. of Bays Front 3 Side 2	
		34 Wall Treatment aluminum siding 54	
		35 Plan Shape irregular	
		36 Changes (Explain in #42) prch Addition ☒ Altered ☒ Moved ☐ CB	
		37 Condition Interior 20 Exterior good	
		38 Preservation Underway? Yes ☐ No ☒	
		39 Endangered? By What? Yes ☒ No ☐ too close to road	
		40 Visible from Public Road? Yes ☒ No ☐	
		41 Distance from and Frontage on Road /406	
42 Further Description of Important Features This simple but picturesque cottage has a second floor under a gable roof. Lean-to additions are at the rear and on the west side. Windows are 1-over-1. The front door is sheltered by a hip roof supported by 4 shaped posts with returns, brackets, and an arched frieze. A small brick chimney is slightly off center of the main roof ridge.		Photo	
43 History and Significance This little house sits on a tract of land that was acquired by William Tyler before the middle of the 19th century. After his death this tract of 80 acres was acquired at the estate sale in 1863 by Thomas W. Waters. Two years later, after Waters died in Springfield, Illinois, it was again sold at an estate sale and acquired by Benjamin R. Tyler, probably William's son. He immediately sold it, however, to Robert Y. King of St. Louis. King paid \$1,200, a fairly high figure for the acreage. He was able to make			
44 Description of Environment and Outbuildings The road is now so close to the house that the front entry cannot conveniently be used.			
45 Sources of Information St. Louis County Probate Court, case 1874. St. Louis City Recorder of Deeds, Book 292, p. 544; 315, 43.		46 Prepared by E. Hamilton	
		47 Organization St. Louis County Parks	
		48 Date 8/88	
		49 Revision Date(s)	

St. Louis

Eatherton Cottage

18332 Wild Horse Creek Road

Eatherton Cottage
18332 Wild Horse Creek Road

43. continued

a quick profit, however, selling it later in 1885 for \$1,500. The buyer was James B. Eatherton, member of the family for whom nearby Eatherton Road is named. At the same time Eatherton acquired an adjacent 126 acres. When Eatherton died in 1901 about 150 of the 200 acres were in cultivation, worth about \$350 a year. This house could not have been Eatherton's residence, however, because that house was reached by a private road over part of the farm. Possibly it was used by one of his five sons or three daughters. His wife Martha died less than two years after her husband. This part of the farm was acquired by the youngest daughter, Emma, and her husband John C. Corless, who also owned property farther east on the north side of Wild Horse Creek Road.

SL-AS-020-099

R.O.W.

406 ± -
PT. 1.69 ACS.

N 52° 22'

~~WILD HORSE CREEK~~

250'

994871

ADDN
7/2

446.79

746.78

N 12034

•

Mantle, Raymond & Ann
10.04.72

19W51-0040

RALEIGH-GIVENS INC.
19W42-0037 8088-89S

19W42-0037

402.75.

285.07

N 82° 22' E

705.21

470.12

413.50.

343.37

309.12

ALIEN, WALTER
6577-2

RALEIGH GIVENS INC.
7907-248

19W23-0012

18.09AC,

211115

173.35'

62-7-8-5R

N



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65102
HISTORIC INVENTORY SL-AS-020-100

1 No.		4 Present Name(s) Old Bethel Methodist Church	
2 County St. Louis		5 Other Name(s)	
3 Location of Negatives St. Louis County Parks		25000 Wild Horse Creek Road	
6 Specific Location 66.78 acres in Survey 1956, Township 45, Range 3, west of Wild Horse Creek Road		16 Thematic Category 030 240	
		17 Date(s) or Period constructed 1859	
		18 Style or Design Federal 80	
		19 Architect or Engineer	
7 City or Town If Rural, Township & Vicinity Meramec Township <i>Melrose</i>		20 Contractor or Builder	
8 Site Plan with North Arrow <i>Vic.</i>		21 Original Use, if apparent church 06A	
9 Coordinates UTM Lat Long		22 Present Use barn	
		23 Ownership Public ☐ Private ☒	
		24 Owner's Name & Address, if known Sharon Hemmann, Trustee 721 E. Jackson Road St. Louis, MO 63119	
		25 Open to Public? Yes ☐ No ☒	
10 Site: ☐ Building ☒ Structure: ☐ Object: ☐		26 Local Contact Person or Organization	
11 On National Register? Yes ☐ No ☒		27 Other Surveys in Which Included <u>100 Historic Buildings in</u> <u>St. Louis County (1970)</u> Coombs & Elgin (1965), E-2	
12 Is Eligible? Yes ☐ No ☐		28 No. of Stories 1 1/2	
13 Part of Estab. Hist. Dist.? Yes ☐ No ☒		29 Basement? Yes ☐ No ☒	
14 District Potent'l? Yes ☐ No ☒		30 Foundation Material stone 40	
15 Name of Established District		31 Wall Construction stone LS	
42 Further Description of Important Features The squared rubble walls have remarkably smooth surfaces, but they are losing mortar in their lower courses due to ground water. Windows have lost their glass but retain some muntins. The front window over the entry was probably 6-over-6, and the large side windows were 12-over-12 and had pedimented lintels. The paneled double entrance doors are surmounted by a toplight. The cornice has short returns.		32 Roof Type & Material GB gable, tar paper	
		33 No. of Bays Front 1 Side 2	
		34 Wall Treatment rubble 40	
		35 Plan Shape rectangular	
43 History and Significance Kenneth Coombs thought this was a school when he surveyed the county in 1965, and it was published as such in 1970. Chylene Daub published a history in 1983 based on information provided by Alvin Steines, who was then the owner of the property. According to her, this building was built for \$2,000 for the Bethel Methodist Church, which had been formed the previous year. The pastor at the time was Wesley J. Browning. Bethel		36 Changes (Explain in #42) Addition ☐ Altered ☐ Moved ☐	
		37 Condition Interior ruinous Exterior poor	
		38 Preservation Underway? Yes ☐ No ☒	
		39 Endangered? By What? Yes ☒ No ☐ deterioration	
44 Description of Environment and Outbuildings The building now stands at the edge of a field, separated from the road by the narrow channel of Wild Horse Creek.		40 Visible from Public Road? Yes ☒ No ☐	
		41 Distance from and Frontage on Road	
		X Photo	
45 Sources of Information Chylene Jahn Daub, <u>Golden Anniversary of Ellisville, Missouri</u> <u>1932-1982</u> (1983), pp. 216-217. continued		46. Prepared by E. Hamilton	
		47. Organization St. Louis County Parks	
		48 Date 8/88	
		49 Revision Date(s)	

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49

County
St. Louis
Present Name(s)
Old Bethel Methodist Church

Other Name(s)
25000 Wild Horse Creek Road

Old Bethel Methodist Church
25000 Wild Horse Creek Road

43. continued

was on the Meramec Circuit, which included churches at Franklin, Eureka, and Glencoe as well as in Jefferson County. The congregation suffered during the Civil War because of its Southern sympathies. The ground on which the church was built had been granted initially by the Spanish colonial government to James Mackey (who also owned a large tract on the Gravois where White Haven was built). He sold 200 arpents, including this part, to Alexander Graham, who in 1821 sold it to Stephen Hancock, Sr. Hancock died in 1827. His son Stephen, Jr., died in 1853, and in 1857 the estate was partitioned. This part was sold to William Lindsay for \$1,680. In 1864 Lindsay gave it to the Managers of the Roman Catholic Orphan Asylum of St. Louis, and two years later they sold it for \$2,000 to Peter Richard Kenrick, the Archbishop. It is said that the little Methodist church, discovering itself on Catholic land, decided to move. Actually the church did not move until after Kenrick sold the land at the end of 1866 to Frederick Solf for \$1,250. It was he, according to Scharf, who refused to sell. The church bought property further south on Wild Horse Creek Road in February of 1867. The next year Solf sold this land and another 40 acres to Gottfried Denecke. He converted the old church into a farmhouse. Denecke paid \$4,000. When he sold the property eight years later, however, he received only \$3,213.

Hermann Steines came from the Ruhr area of Germany in 1834 and died in 1875 at the age of seventy. His family farm of about 150 acres was on the county line at Melrose Road. His widow Louise (Westholz) bought this farm including the old church from Gottfried and Dorothea Dannecke in 1876 (not 1874). She died in 1894 at the age of 87, and in 1898 her sons Charles R. (who had inherited the home farm) and Frederick W. auctioned this "creekbottom farm." It was purchased by Frederick's son Herman for \$4,000. According to the family, the old church was used as a residence until 1916 and thereafter for storage. Herman Steines died in 1954, and after his wife Catherine's death the property was inherited by their son Alvin. The present owner of the property is the trustee of the Alvin Steines Revocable Living Trust. Bethel United Methodist Church is still in existence and is now located at 17500 Manchester Road in Pond.

45. continued

J. Thomas Scharf, History of St. Louis (1883), p. 1931.

William L. Thomas, History of St. Louis County (1911) pp. 454-455.

Watchman-Advocate, History of St. Louis County (1919). p. 36.

St. Louis County Probate Court, cases 1141; 25115.

St. Louis County Recorder of Deeds, Book 34, p. 305; 75, 525; 7755, 1674.


St. Louis City Probate Court, cases 787 and 3910.

St. Louis City Recorder of Deeds Book A, p. 354; L, 4; 222, 213; 295, 363; 304, 333; 331, 111; 396, 198; 561, 225.

PT. SURVEY 1956

SL-AS-022-100

644

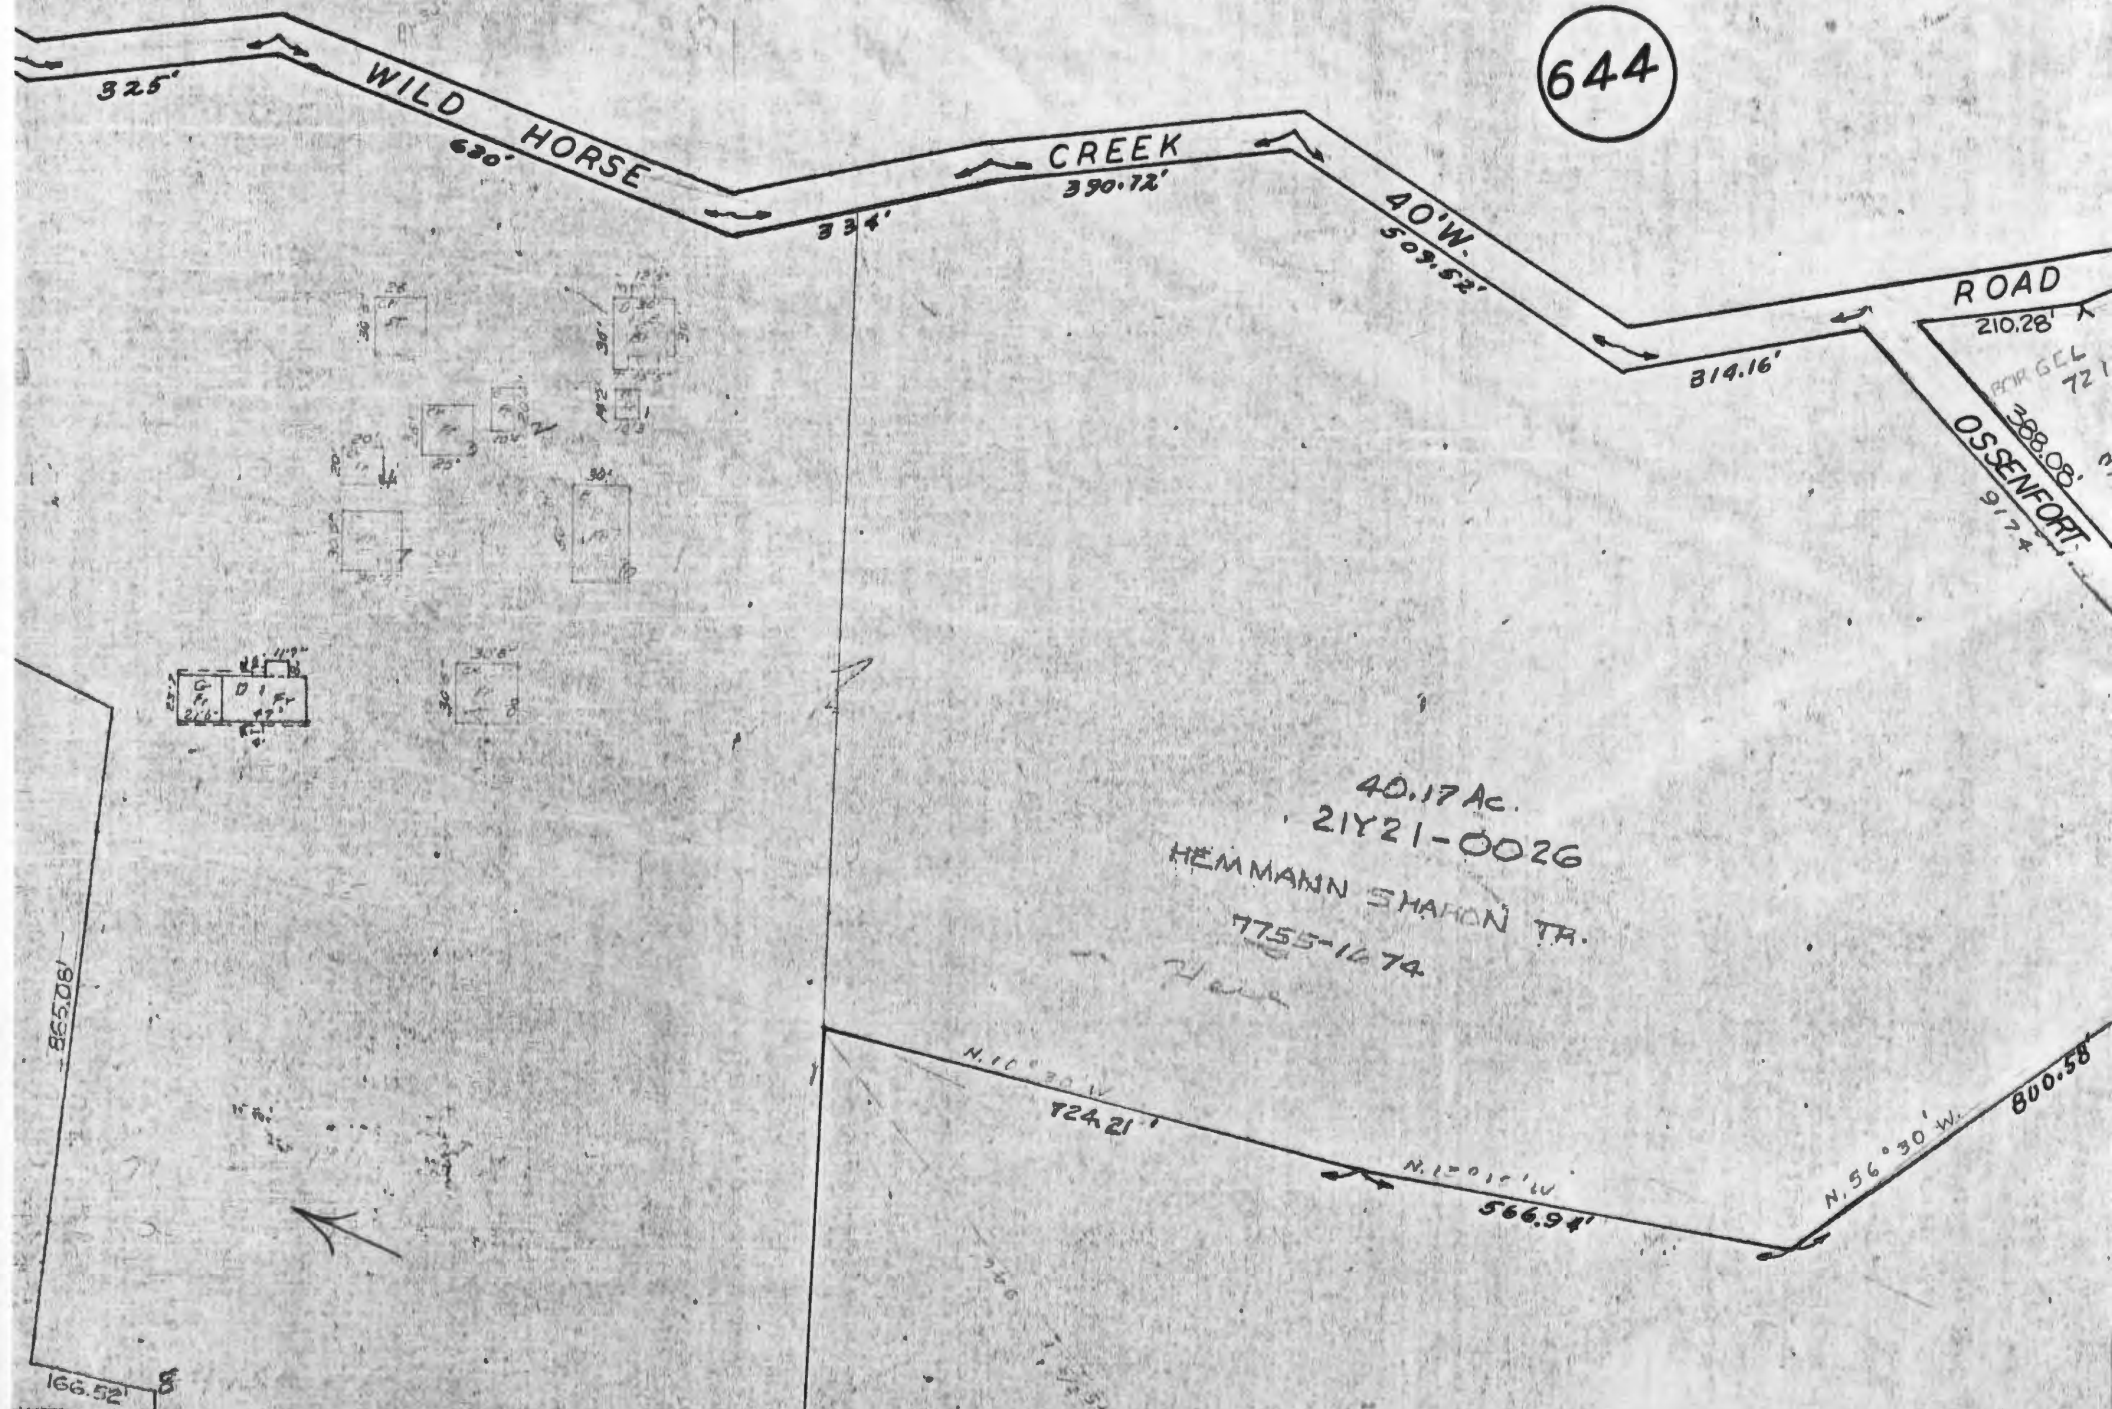



Office of Historic Preservation, P.O. Box 176, Jefferson City, Missouri 65101
HISTORIC INVENTORY

SL-AS-020-101

1 No 170632135 2 County St. Louis 3 Location of Negatives 33015-24	4 Present Name(s) Rudolph Sahm House 5 Other Name(s) 912 N. Woods Mill Road	1 No					
6 Specific Location pt. Lot 3, Kinkead Estate in Survey 367 T45 R5. 7 City or Town If Rural, Township & Vicinity Missouri River Township 8 Site Plan with North Arrow	16 Thematic Category 17 Date(s) or Period constructed c. 1880 18 Style or Design vernacular Victorian 09 19 Architect or Engineer 20 Contractor or Builder 21 Original Use, if apparent residence 01A 22 Present Use residence 23 Ownership Public ☐ Private ☒ 24 Owner's Name & Address, if known Gerald K. & Carol A. Smith 25 Open to Public? Yes ☐ No ☒ 26 Local Contact Person or Organization 27 Other Surveys in Which Included	28 No. of Stories 2-2 29 Basement? Yes ☒ No ☐ 30 Foundation Material not evident 01 31 Wall Construction frame 6W 32 Roof Type & Material gable, comp. GB Ft 33 No. of Bays Front 5 Side 3 34 Wall Treatment aluminum siding 54 35 Plan Shape irregular 36 Changes (Explain in #42) Proch 10 SI Addition: ☒ Altered ☒ Moved ☐ 37 Condition Interior Exterior good 38 Preservation Underway? Yes ☐ No ☒ 39 Endangered? By What? Yes ☐ No ☒ 40 Visible from Public Road? Yes ☒ No ☐ 41 Distance from and Frontage on Road /204'	2 County St. Louis 4 Present Name(s) Rudolph Sahm House				
9 Coordinates UTM Lat Long 10 Site: ☐ Building ☒ Structure: ☐ Object: ☐ <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>11 On National Register? Yes ☐ No ☒</td> <td>12 Is It Eligible? Yes ☐ No ☐</td> </tr> <tr> <td>13 Part of Estab Hist Dist? Yes ☐ No ☒</td> <td>14 District Potent'l? Yes ☐ No ☒</td> </tr> </table> 15 Name of Established District	11 On National Register? Yes ☐ No ☒	12 Is It Eligible? Yes ☐ No ☐	13 Part of Estab Hist Dist? Yes ☐ No ☒	14 District Potent'l? Yes ☐ No ☒	32 Further Description of Important Features The front porch over the center three bays has a shed roof with a gable over the center. The porch posts are square. The porch has elaborate cornice and six-over-six windows with non-fitting shutters. Brick chimneys are located inside the ends. A large screen porch is on the south side of the house. It has a gable roof and a three by four bay of screens. Photo		5 Other Name(s) 912 N. Woods Mill Road
11 On National Register? Yes ☐ No ☒	12 Is It Eligible? Yes ☐ No ☐						
13 Part of Estab Hist Dist? Yes ☐ No ☒	14 District Potent'l? Yes ☐ No ☒						
33 History and Significance Rudolph Sahm came to St. Louis from Germany in 1853. He bought 105 acres in Survey 367 sometime before 1862, but the 1878 county atlas does not indicate a house on this site. Presumably, then, it was built shortly thereafter. The Rudolph Sahm who owned this property when he died in 1928 was not the same person as the one described in <u>Heritage of the Creve Coeur Area</u>. This Sahm had a wife Elizabeth, a son William (cont'd) 34 Description of Environment and Outbuildings The lot is just north of Land-O-Woods Drive. The house stands at the top of a steep bank above the road.							
35 Sources of Information Gloria Dalton, ed. <u>Heritage of the Creve Coeur Area</u> (1976), p. 88. St. Louis County Probate Court, #8197.		46 Prepared by Esley Hamilton 47 Organization St. Louis County Parks 48 Date 8/89 49 Revision Date(s)					

Rudolph Sahn House
912 S. Woods Mill Road

43. continued

who farmed the home place, and daughters Louisa (wife to Otto Sahn) and Emelia (who married Ferdinand Zimmer and predeceased her father). That Sahn married Emma Mathes and had ten children, none of who were named Louisa or Emelia. That book shows the house before the present rear wing and south porch were added, when it still had scrolled brackets on the porch posts. In 1928 the farm was left to William Sahn.



RUDOLPH SAHM HOME Woods Mill Road

Around 1853 Rudolph Sahm, a wagon maker, arrived in St. Louis from Germany. Some years later, he bought 105 acres on Woodsmill Road near Olive Street Road, cleared the land and built a log cabin. The house was considerably enlarged; the original log cabin is now used as the kitchen.

Emma Mathes married Rudolph Sahm, and they raised their family of ten children in this home. They were the parents of Elizabeth Studt, Olivia Scheffing, Annie Ruppel, William, Fred, Ella Seeger, Gustav "Pete," Loretta Castillon, Clara Sahm, and Talitha Crews.

The last year the fair was held at Little Creve Coeur Lake, Rudolph Sahm received a medal for being the oldest settler.

The lakes that were enjoyed by the Sahm family near their home are now appreciated by the many residents of nearby apartments and homes.



Creve Coeur - Chesterfield Historical Society

WOODS

MILL

40' W. 92.4

* 912 HIGHWAY 140

SL-AS-020-101

WOOD LAKE SEC. 3
SEE PAGE 575 B

WOOD LAKE SECT. 2
PG. 575 B

WOOD LAKE SECT. 1
PG. 575 A



TO MICHIGAN, W.M. F.
100.00 ACRES

17Q630177

290.40' 435.60'
17Q63-0155 A

SMITH, GERALD K. & C.A. H.W.
7529-1767

100.00 ±

17Q63-0087

St. Louis Chinese
CHRISTIAN
CHURCH
8120 1/2 St.

